Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 31, Township 102N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-25-94 (DATE) found a CONC. MON ON 3/4 ROD / CONC. TILE MON OVERPOINTED STONE LEFT STONE INPLACE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-25-94 (DATE) placed a ROD ON S. SIDE OF STONE / CIM OVER STONE/

SKETCH OF REFERENCE TIES

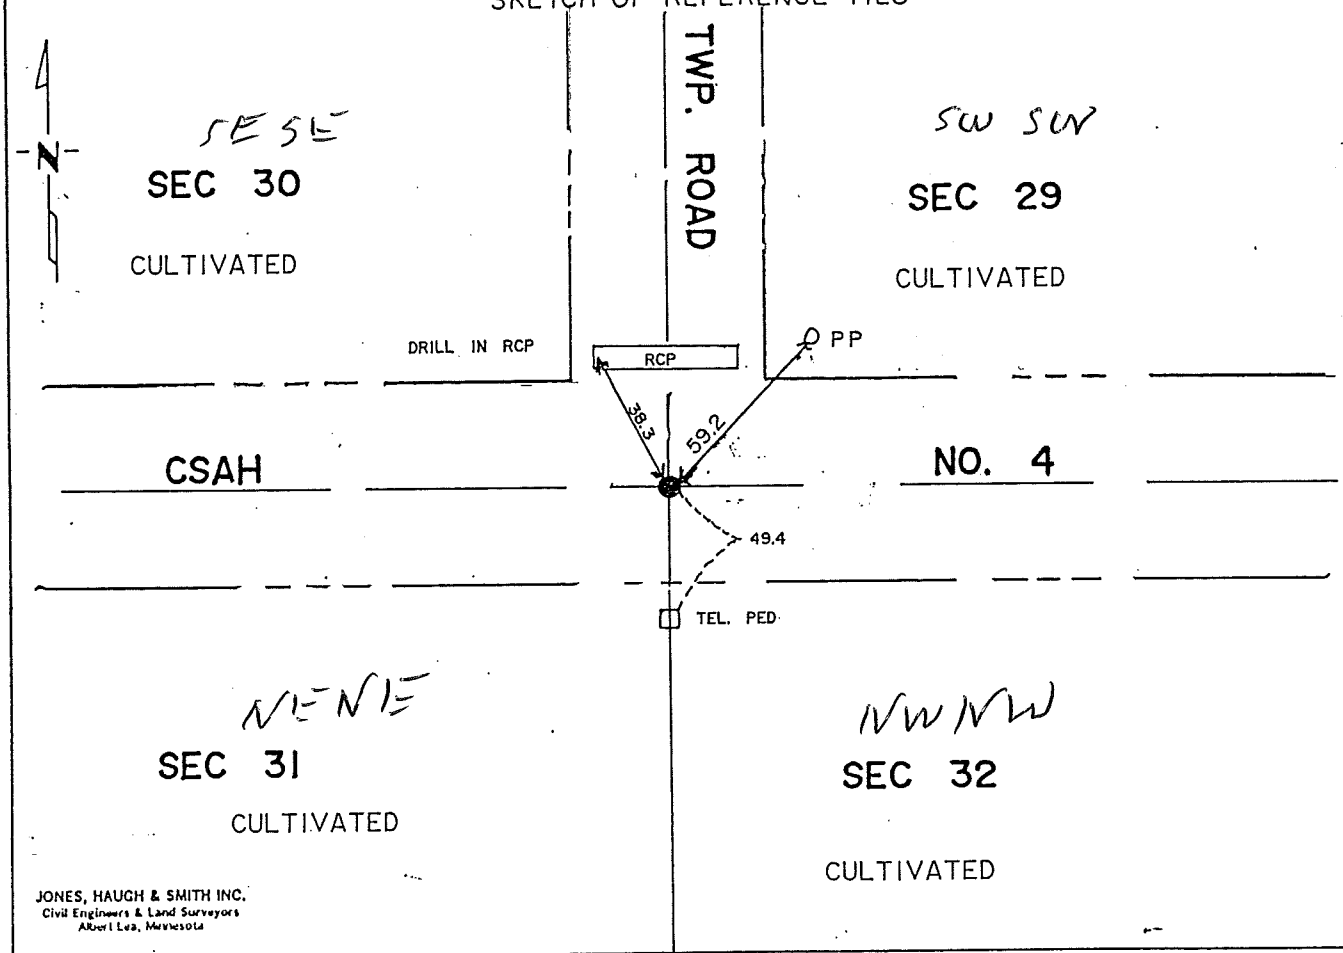

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-7-94

Registration No. 13607

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 11 day of July A.D., 1994

COUNTY RECORDER Charles Enger

By Marlene Manter, Deputy

DOCUMENT NO. 430568

Book 84 Misc Pg 5

MHD FORM NO. 2105

BOOK 84 PAGE 5

STATEMENT OF EVIDENCE

NE cor 31-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show this corner was marked with a wood post and charred stake and a trench with a mound of earth.

The following were contacted for section corner information:
Freeborn County Engineering Department

The following information was obtained to support evidence of the original public land survey corner or a perpetuation thereof:

1891 Clausen field notes indicate a stone at the corner.

1963 Mower County Grading Plans show concrete monument over stone.

1994 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, excavated with a backhoe in the area of the corner and found the concrete monument over the stone.

The stone is accepted as marking the location of the original public land survey corner.

BOOK 84 PAGE 6

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.