Index No. P 123 (E), 125 (K)

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 33, Township 102N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-13-92 (DATE) found a MOWER CO. HWY. DEPT. ALUM. MONUMENT AND 6"Ø CONCRETE MONUMENT 2.50' BELOW ROAD SURFACE

■ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-13-92 (DATE) placed a NOTHING

SKETCH OF REFERENCE TIES

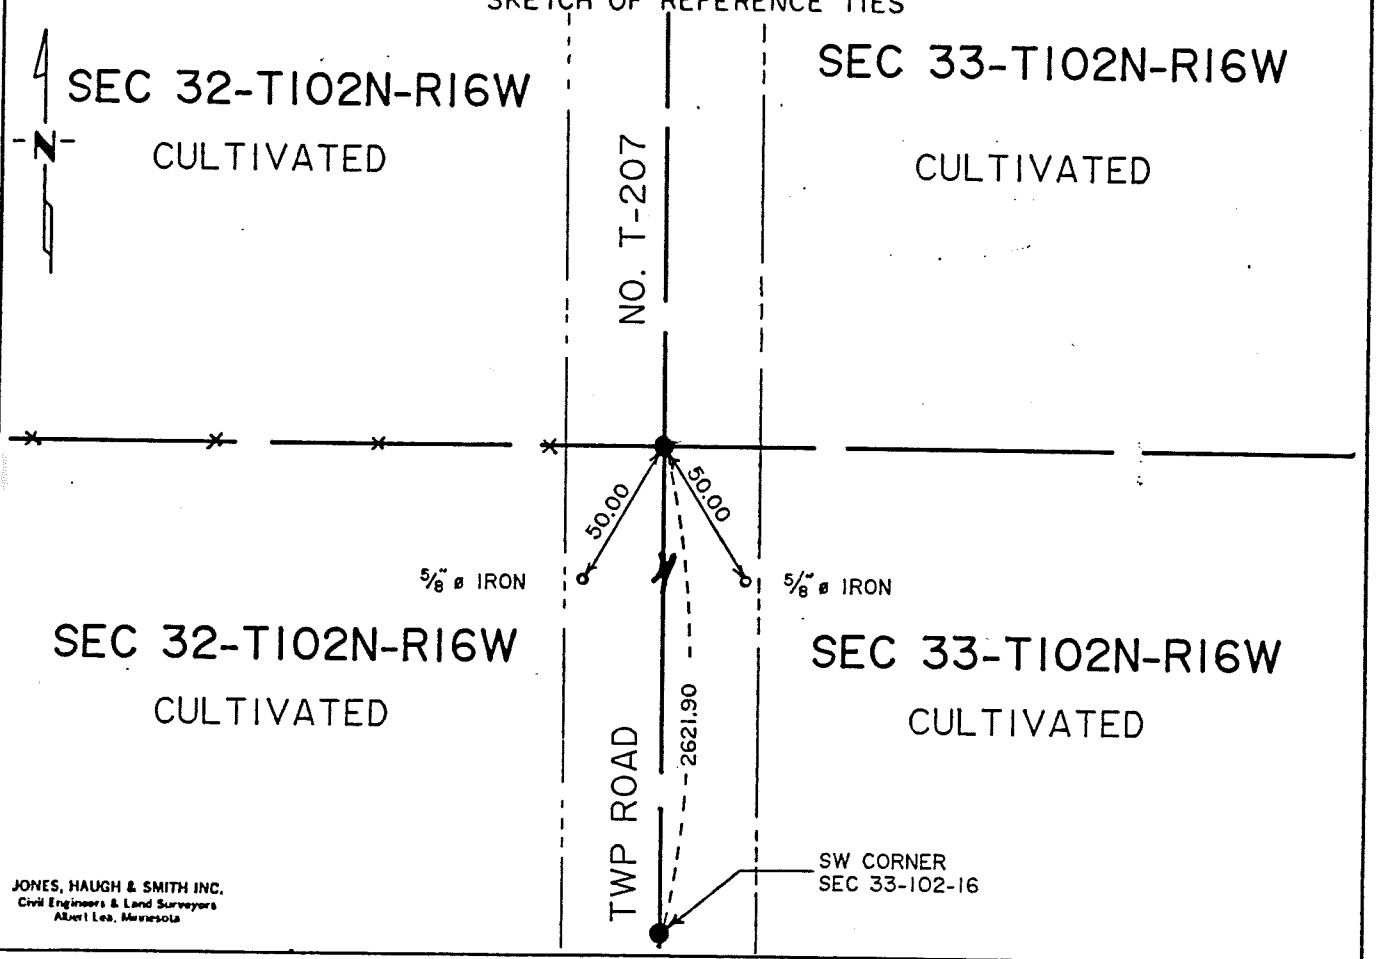

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-16-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 33-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following evidence was obtained to support a perpetuation of the original public land survey corner.

1886 Clausen field notes indicate a post inplace.

Book A in the Office of Mower County Highway Department indicates a concrete monument inplace at the split of the northeast corner of Section 32 and the southeast corner of Section 32. Measured distance of 2621.45 feet to E 1/4 corner of Section 32.

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug with County backhoe on centerline of Township Road T-207. Found a alum. monument marked "Mower Co Hwy Dept". 2621.90 feet north of the southwest corner continued digging and found 6" diameter concrete monument 2.5 feet deep under the alum. monument. Left both monuments inplace and agrees with past records recorded in Book 'A'.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.