Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 29, Township 102N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/24/1996 (DATE) found a 1"X1.8' STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/24/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

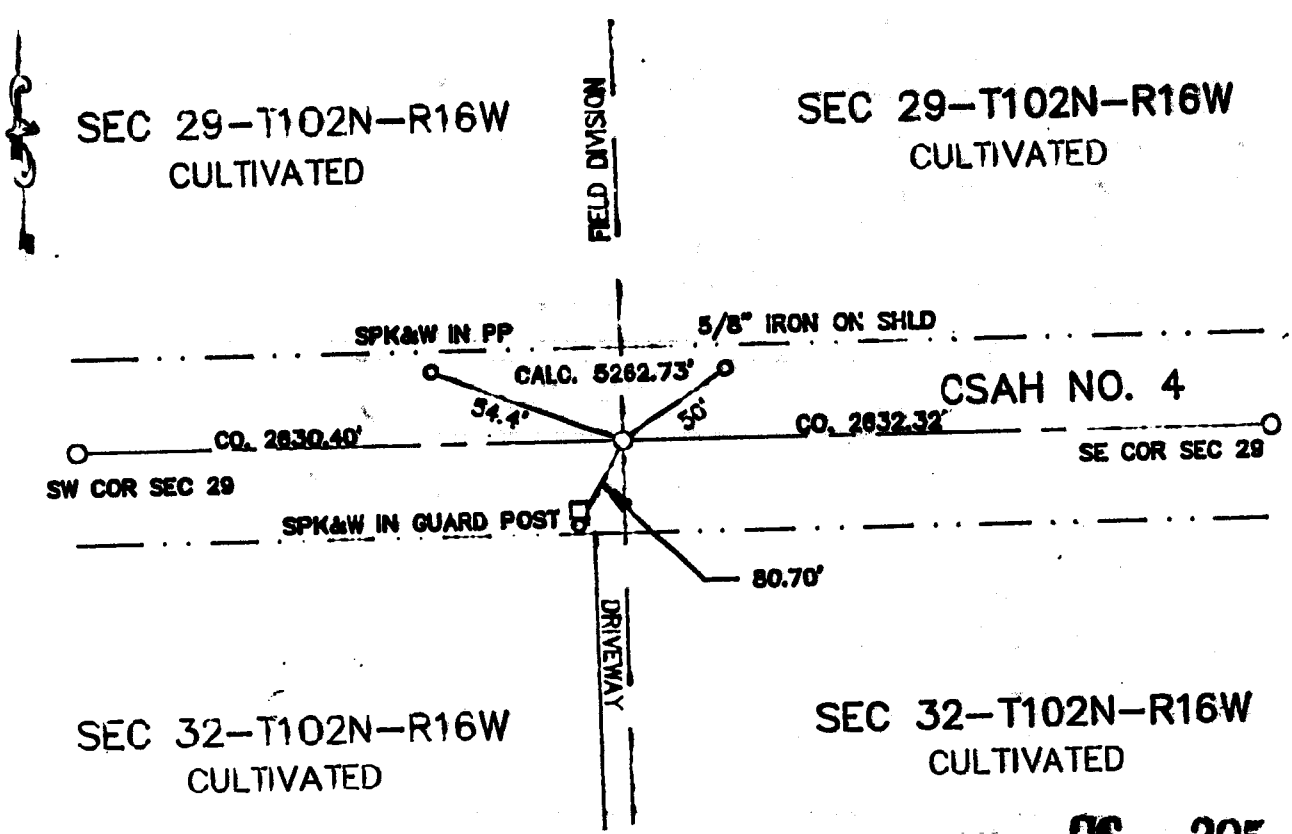

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 295

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ 9-9-97 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 10 day of Sept A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 456002

M.H.D. FORM NO. 2105

Book 96 Misc Page 295

S 1/4 Cor SEC 29-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Mower County records state inplace concrete monument.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of CSAH No. 4 E-W. Uncovered a 1'x1.8' pointed stone 3.5' below the road surface. Continued digging and found no other evidence of concrete monument or original PLS corner. Accepted stone as a perpetuation of original PLS corner. Placed a 5/8" iron capped #13807 on the east side of stone. Placed a cast iron monument above stone found.

The monument fits occupation and r d centerlines within the section and is accepted as best evidence of a perpetuation of the original public land urvey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 29, Township 102N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/24/1996 (DATE) found a 1'X1.8' STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/24/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

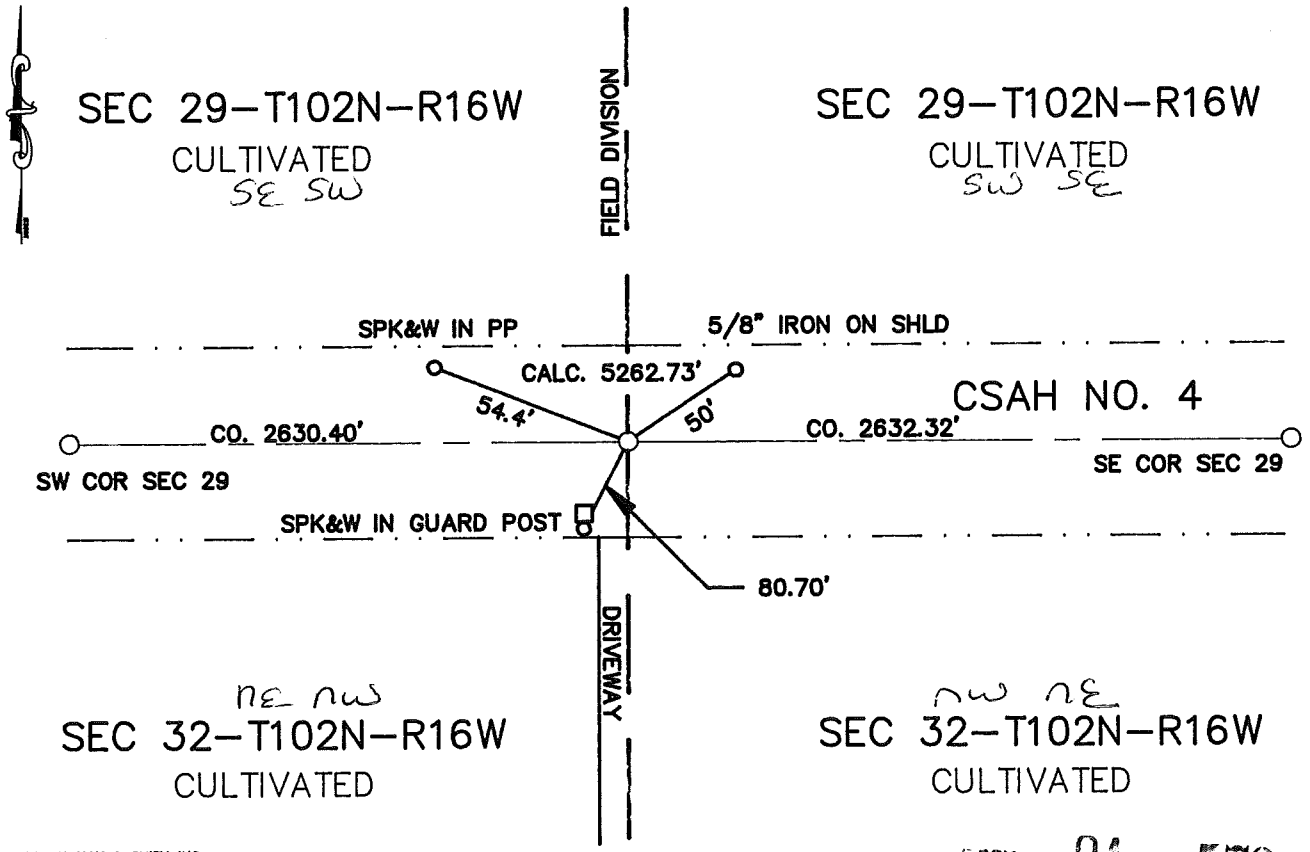

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 94 PAGE 570

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 4-4-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 9 day of April A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 452260

M.H.D. FORM NO. 2105

Book 94 Misc Page 570

S 1/4 Cor SEC 29-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of CSAH No. 4 E-W. Uncovered a 1'x1.8' pointed stone 3.5' below the road surface. Continued digging and found no other evidence of original PLS corner. Accepted stone as a perpetuation of original PLS corner. Placed a 5/8" iron capped #13807 on the east side of stone. Placed a cast iron monument above stone found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

BOOK 94 PAGE 571