Index No. p106 "I"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 36, Township 102N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-12-92 (DATE) found a CAST IRON MOUNUMENT OVER POINTED FIELD STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-12-92 (DATE) placed a RESET CAST IRON MOUNUMENT

SKETCH OF REFERENCE TIES

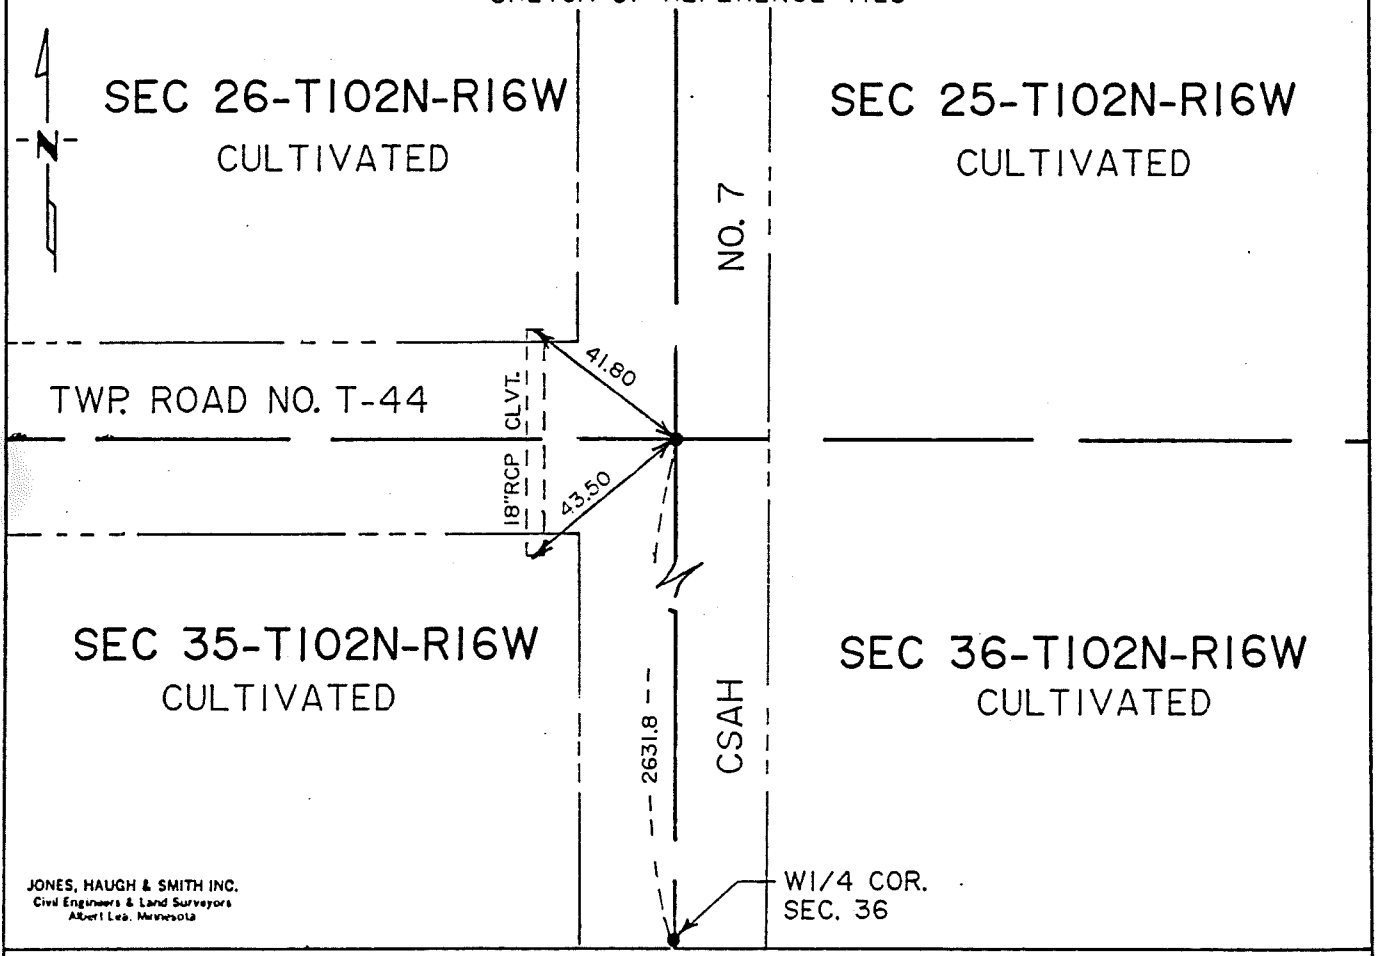

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-16-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Sec 36-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following evidence was obtained to support a perpetuation of the original public land survey corner.

1886 Clausen field notes indicate a government post at the northeast corner of Section 35-102-16.

1954 Book A in the Office of Mower County Highway Department indicates a 1/2" diameter iron over stone. The following ties were taken:
NW 69.9' to tele pole
SW 37.3' to SE corner S.C. apron
E 50.4' to straight fence post
SE 36.6' to SW corner S.C. apron

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug with County backhoe on centerline centerline of CSAH No. 7 and Township Road T-44. Found a harrison cast iron monument over a pointed field stone 2.5 feet deep. Set cast iron monument over stone, one foot below road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.