Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 6, Township 102N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 9/17/1992 (DATE) found a NO EVIDENCE OF PLS CORNER.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9/17/1992 (DATE) placed a CAST IRON MONUMENT ON STRAIGHT LINE.

SKETCH OF REFERENCE TIES

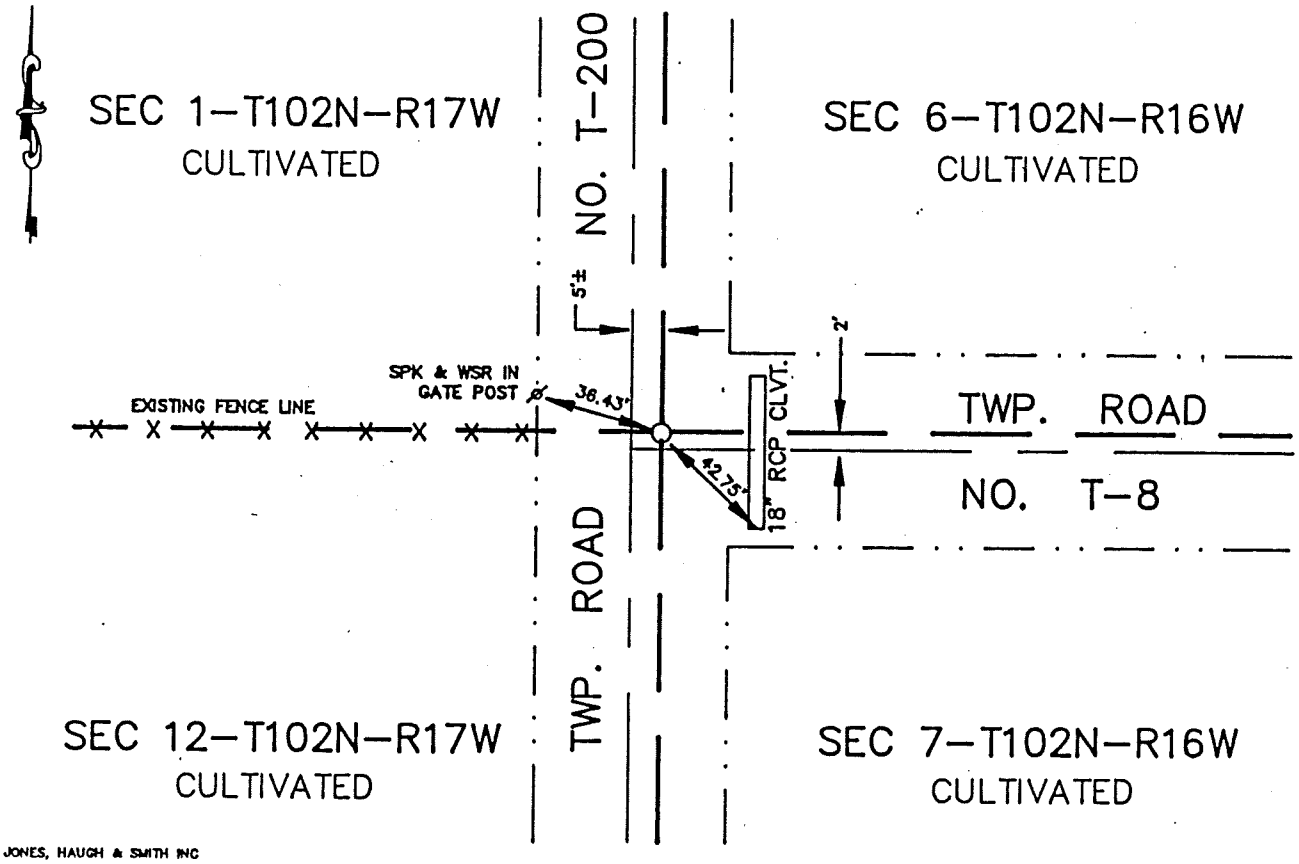

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-16-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec 6-102-16

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

14" Burr Oak	N 70° E	175 links (115.50 ft)
14" Burr Oak	S 30° W	167 links (110.22 ft)
12" Burr Oak	S 60° E	125 links (82.50 ft)
10" Burr Oak	N 65° E	187 links (123.42 ft)

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug with Mower County backhoe a 6'x12'x4' deep hole on centerline centerline of Township Road T-200 and T-8 and found nothing. Set cast iron monument on straight line at proportional part between W 1/4 corner Section 6 and W 1/4 Section 7.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.