TIE BOOK P. 23

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 15, Township 102N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 10-7-85 (DATE) found a 10"x12"x20" pointed field stone with remains of wood post on north side of stone

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-7-85 (DATE) placed a 5/8"ϕx24" iron in remains of wood post

SKETCH OF REFERENCE TIES

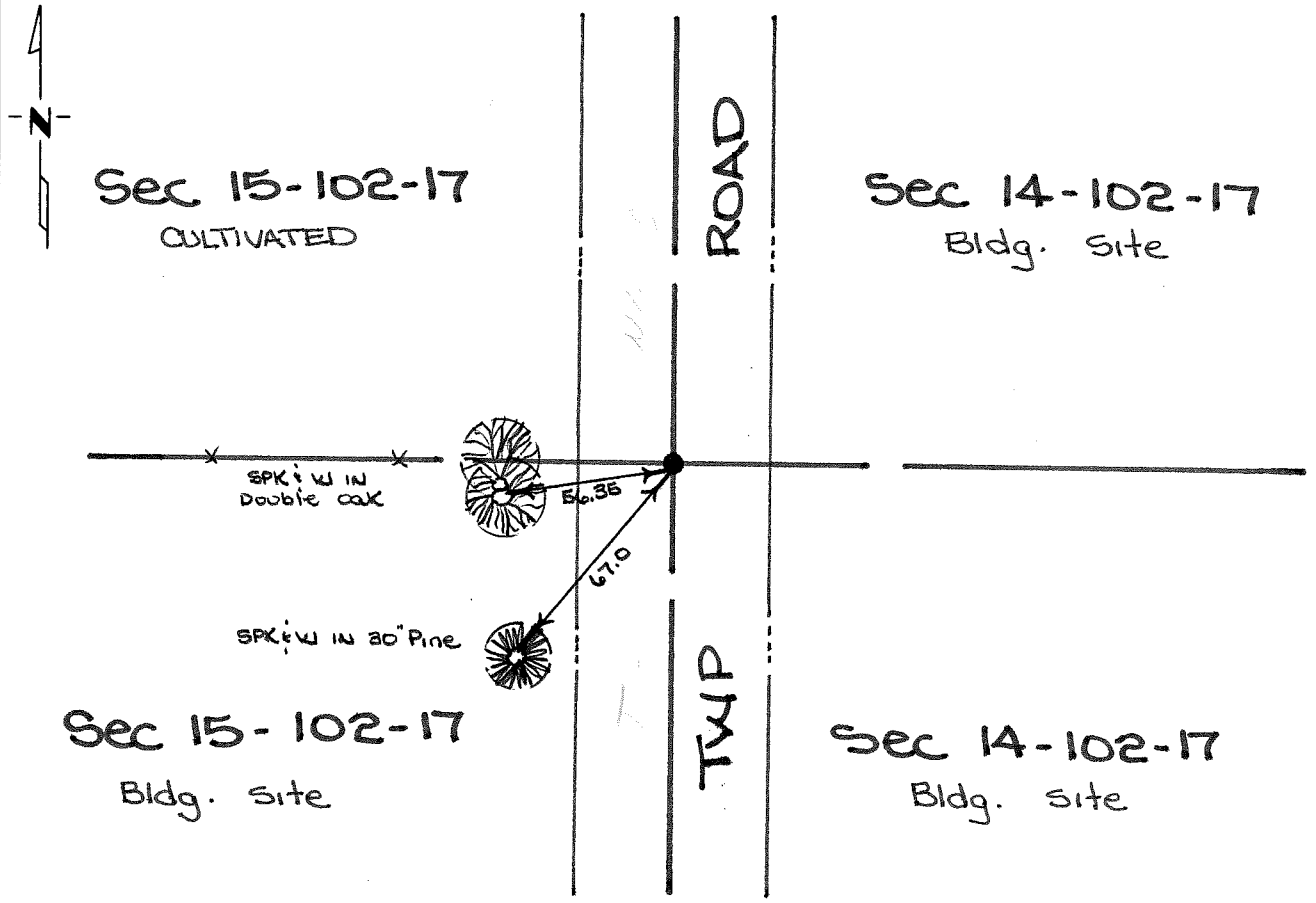

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

H. [illegible] III
SIGNATURE

10-10-85
DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

$E\frac{1}{4}$ corner Section 15-102-17

1854 William I. Anderson, Deputy Surveyor, set wood post during public land survey.

1888 M.N. Clausen, Registered Land Surveyor, found government post during private land survey.

1985 Jones, Haugh & Smith Inc crew dug with backhoe at intersection of centerline township road and fence line west at a depth of 1.5 feet below road surface. Found a large 10" x 12" x 20" pointed stone with remains of wood post on north side of stone. Drive a 5/8"ø x 24" iron into wood post 0.5 feet below road surface.

Corner found fits occupation and road centerline and was accepted as a perpetuation of the original public land survey corner.