"P" TIE BOOK. P23 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 15, Township 102N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 10-7-85 (DATE) found a 8"x10"x16" pointed field stone with remains of wood post

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-7-85 (DATE) placed a 5/8"ϕx24" iron on north side of stone and 5/8 ϕ x 24" iron over stone on road surface.

SKETCH OF REFERENCE TIES

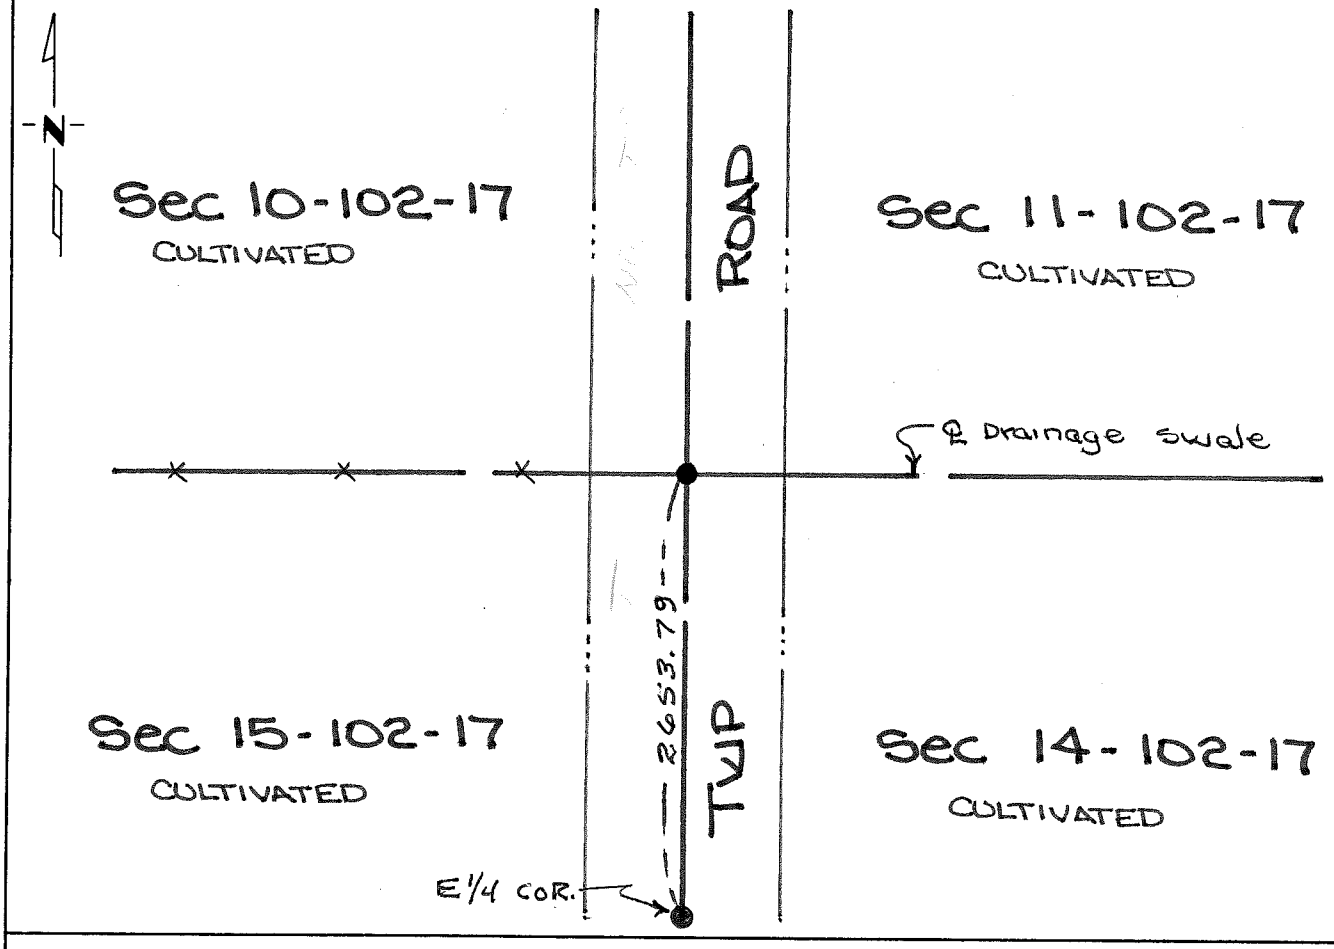

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] ☒ 10-10-85
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE cor Section 15-102-17

1854 William I. Anderson, Deputy Surveyor, set wood post during public land survey.

1899 M.N. Clausen, Registered Land Surveyor, found government post during private survey.

1985 Jones, Haugh & Smith Inc crew dug with backhoe at intersection of centerline of township road and fence line west at 2.5 feet below road surface. Uncovered a 8" x 10" x 16" long pointed field stone with the remains of an old wooden post. Placed 5/8"ø x 24" iron on north side of stone and a 5/8"ø x 24" iron over stone on road surface.

Corner found fits occupation and road centerline and was accepted as a perpetuation of the public land survey corner.