Index No. P20 "N"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 18, Township 102N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 7-13-87 (DATE) found a corner fence post at 3-way fence intersection.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 7-13-87 (DATE) placed a cast iron monument on west side of corner fence post found.

SKETCH OF REFERENCE TIES

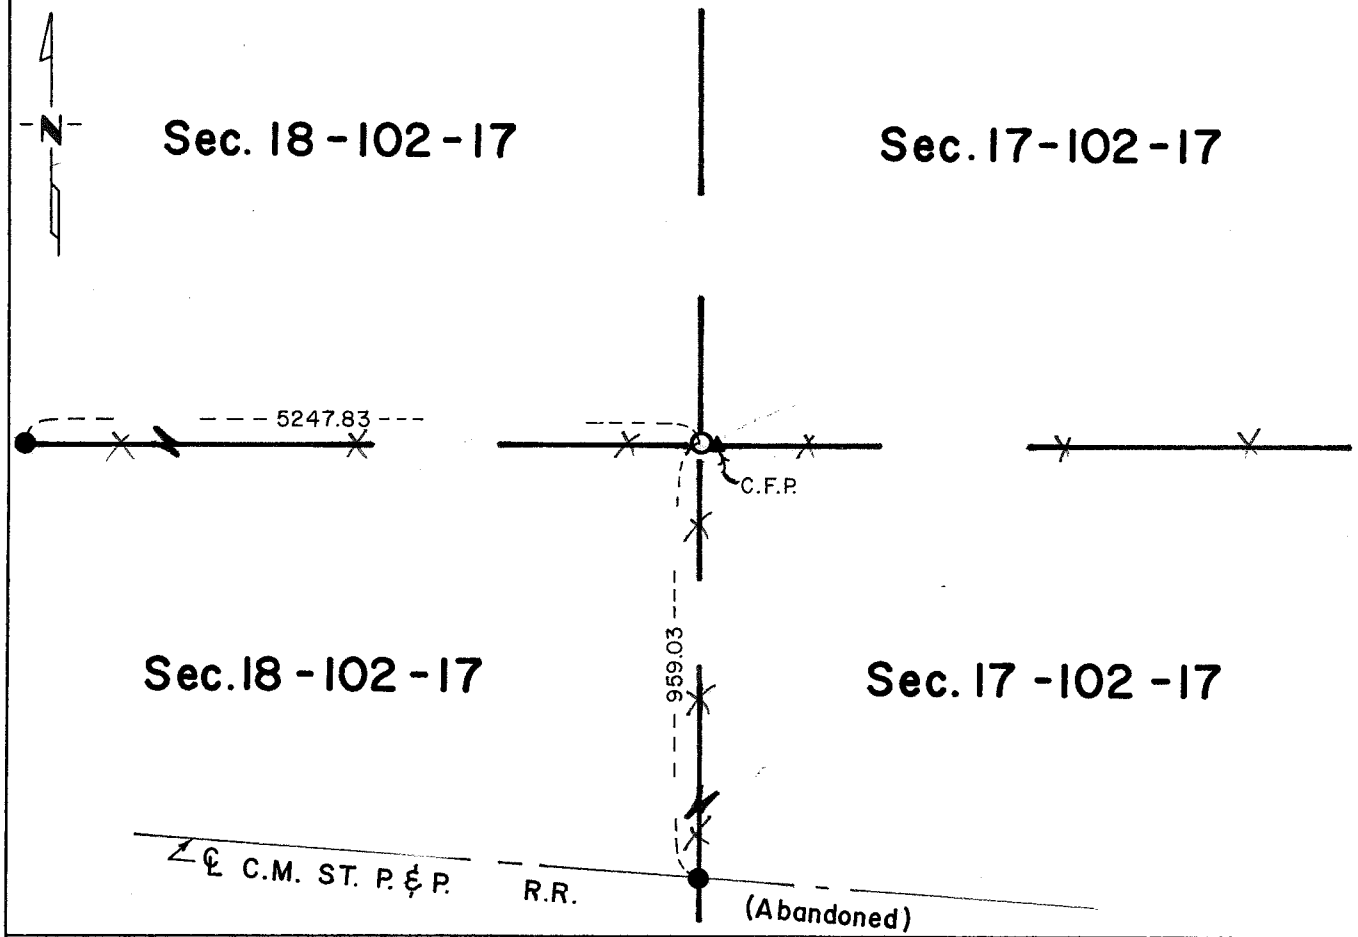

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-12-88 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
$E\frac{1}{4}$ corner Section 18-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the US General Land Office in 1854. The government notes show this corner was marked with a wood post and the following bearing trees were marked:

12" Burr Oak	S 30^{o} W	30 Links
13" Burr Oak	N 48^{o} E	65 Links

The following were contacted for section corner information:

Mower County Engineering Department

1978 Jones, Haugh & Smith crew during private survey found a corner fence post in a 3-way fence intersection and accepted as best evidence.

1987 Jones, Haugh & Smith crew found a corner fence post at a 3-way fence intersection which agrees with 1978 records. Placed a cast iron monument on west side of corner fence post.

This position is accepted as best evidence of a perpetuation of public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith