Index No. P20 "D"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 17, Township 102N, Range 17 W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 7-13-87 (DATE) found a sq. headed bolt 3' long 1' below road surface.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 7-13-87 (DATE) placed a cast iron monument on road surface over bolt found.

SKETCH OF REFERENCE TIES

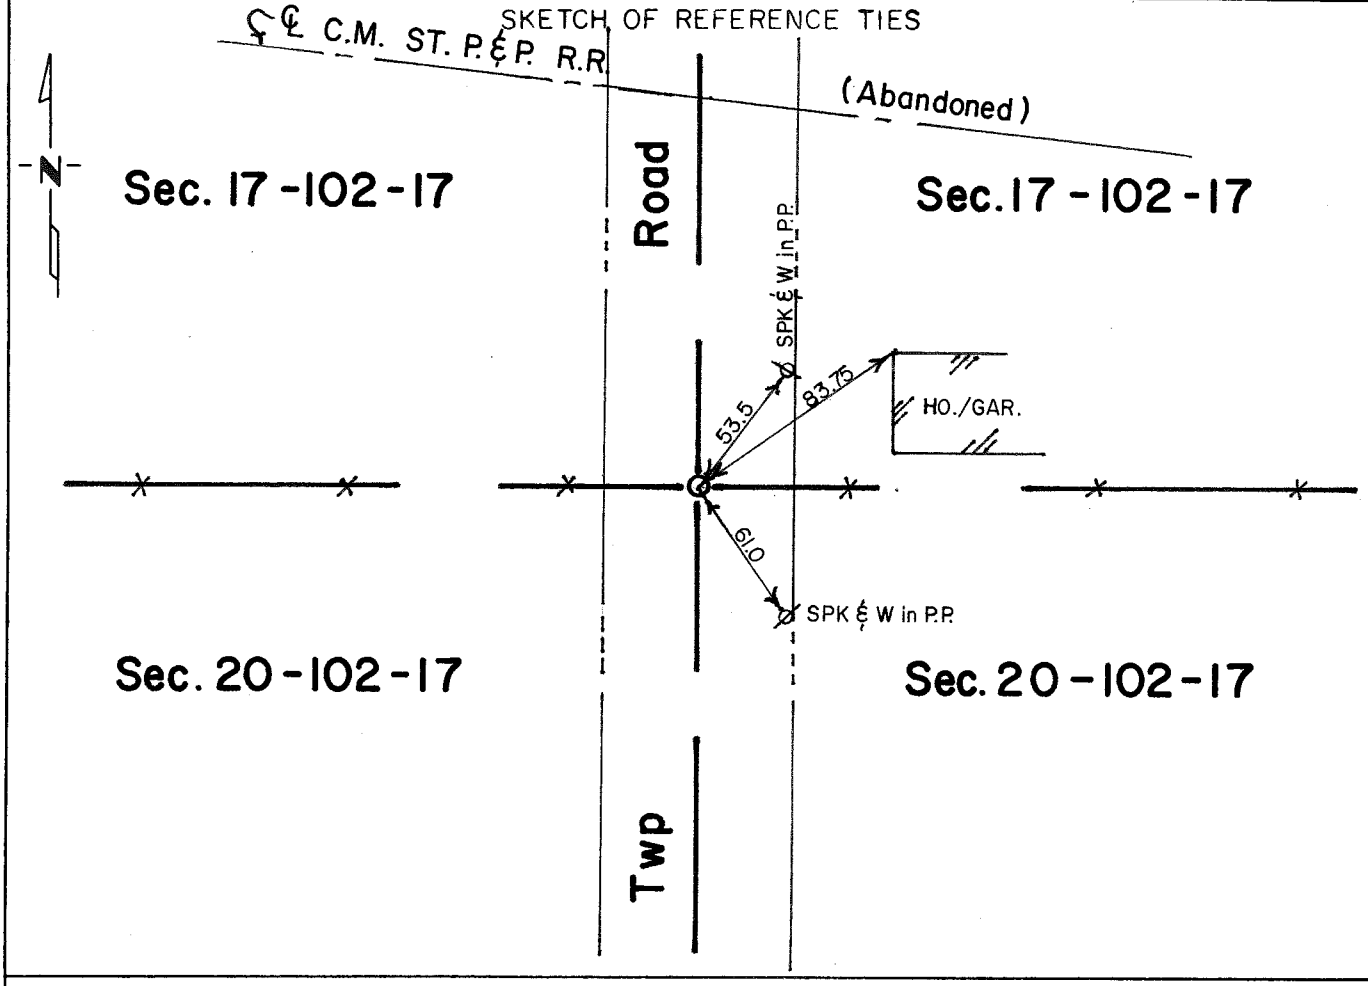

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-12-88 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
S¼ corner Section 17-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the US General Land Office in 1854. The government notes show this corner was marked with a wood post and the following bearing trees were marked:

9" Burr Oak	S 19½° W	371 Links
12" Burr Oak	N 50° W	290 Links

The following were contacted for section corner information:

Mower County Engineering Department

1987 Jones, Haugh & Smith crew dug with the Mower County backhoe on the centerline of north-south road in line with fence east and west and uncovered a three foot long square headed bolt one foot below road surface. Continued digging and uncovered no further evidence of public land survey corner. Accepted bolt as best evidence of perpetuation of public land survey corner and set a cast iron monument.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith