Index No. 11P

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 21, Township 102 N, Range 17 W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 7-13-87 (DATE) placed a cast iron monument on road surface.

SKETCH OF REFERENCE TIES

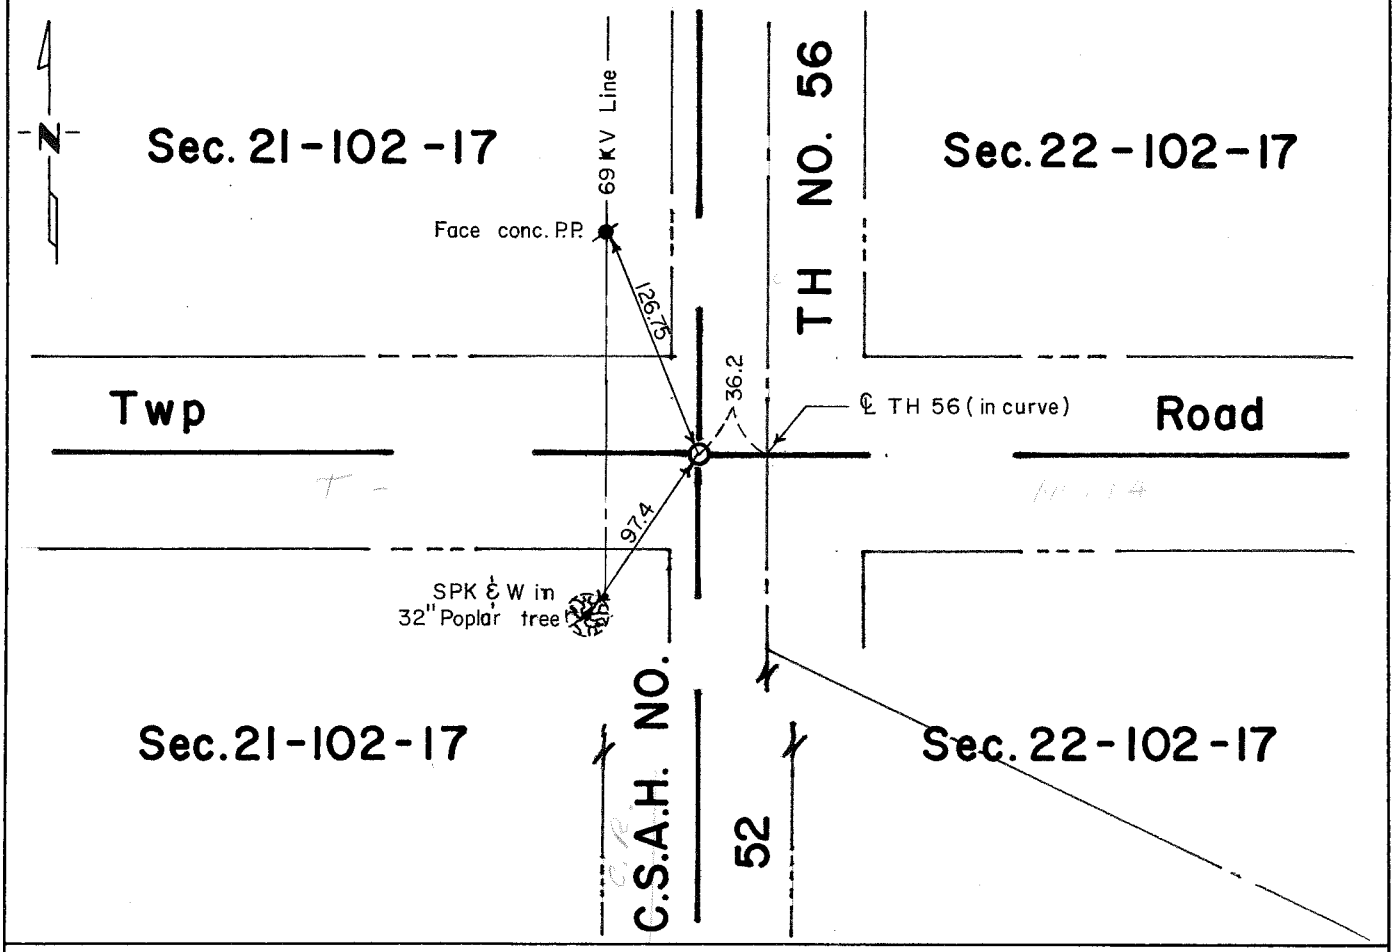

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-12-88

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
$E\frac{1}{4}$ corner Section 21-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the US General Land Office in 1854. The government notes show this corner was marked with a wood post and the following bearing trees marked:

14" Burr Oak S 16° W 385 Links

The following were contacted for section corner information:

Minnesota Department of Transportation - Rochester
Mower County Engineering Department

1950± Right-of-way stationing map on Trunk Highway No. 56 shows corner at intersection of road centerlines east-west-south, 37.6 feet west of centerline point of termination at Sta 184+86.6.

1980 Jones, Haugh & Smith crew during power line survey found no evidence of corner. Therefore established position of corner using information of Trunk Highway No. 56 right-of-way stationing map and set spike and washer.

1987 Jones, Haugh & Smith crew found a spike and washer set in 1980. Removed spike and set a cast iron monument.

The monument set fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith