Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 25, Township 102N Range 17W, 5th P.M.


STATE OF MINNESOTA, County of MOWER

At the corner location shown on the sketch

☐ On 09/06/2000 (DATE) found a FIELD STONE, 2.5' BELOW ROAD SURFACE
SET A 5/8"X16" IRON WITH C.I.M OVER STONE, 0.40' BELOW ROAD SURFACE
☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

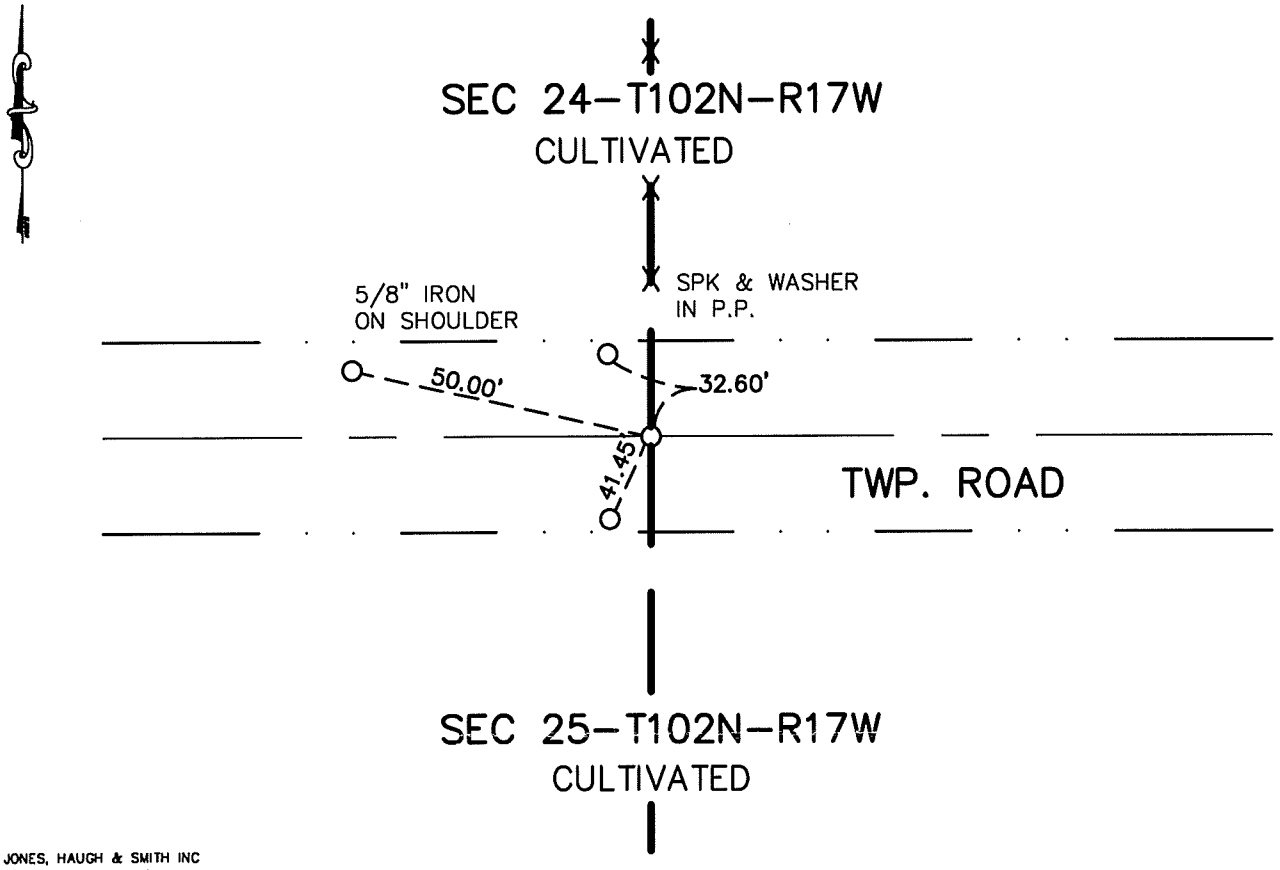

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 9-21-00
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer
☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____
By _____, Deputy
DOCUMENT NO. _____

M.H.D. FORM NO. 2105

N 1/4 Cor Sec 25-102-17

Deputy Surveyor William I. Anderson of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

2000 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Mower County backhoe, at the intersection of Twp. Road centerline and fence line North. Uncovered a field stone 2.5′ below road surface, in line with fence and road centerline. Accepted stone as a true perpetuation of the original corner, and set a capped 5/8″ iron on West side of stone. Set a 5/8″x16″ iron with C.I.M. 0.40′ below road surface. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.