Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 30, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-9-91 (DATE) found a 5/8"Ø×12" iron over a harrison cast iron monument over a 2"sq.X14" wood stake.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-9-91 (DATE) placed a cast iron monument at location of monument found.

SKETCH OF REFERENCE TIES

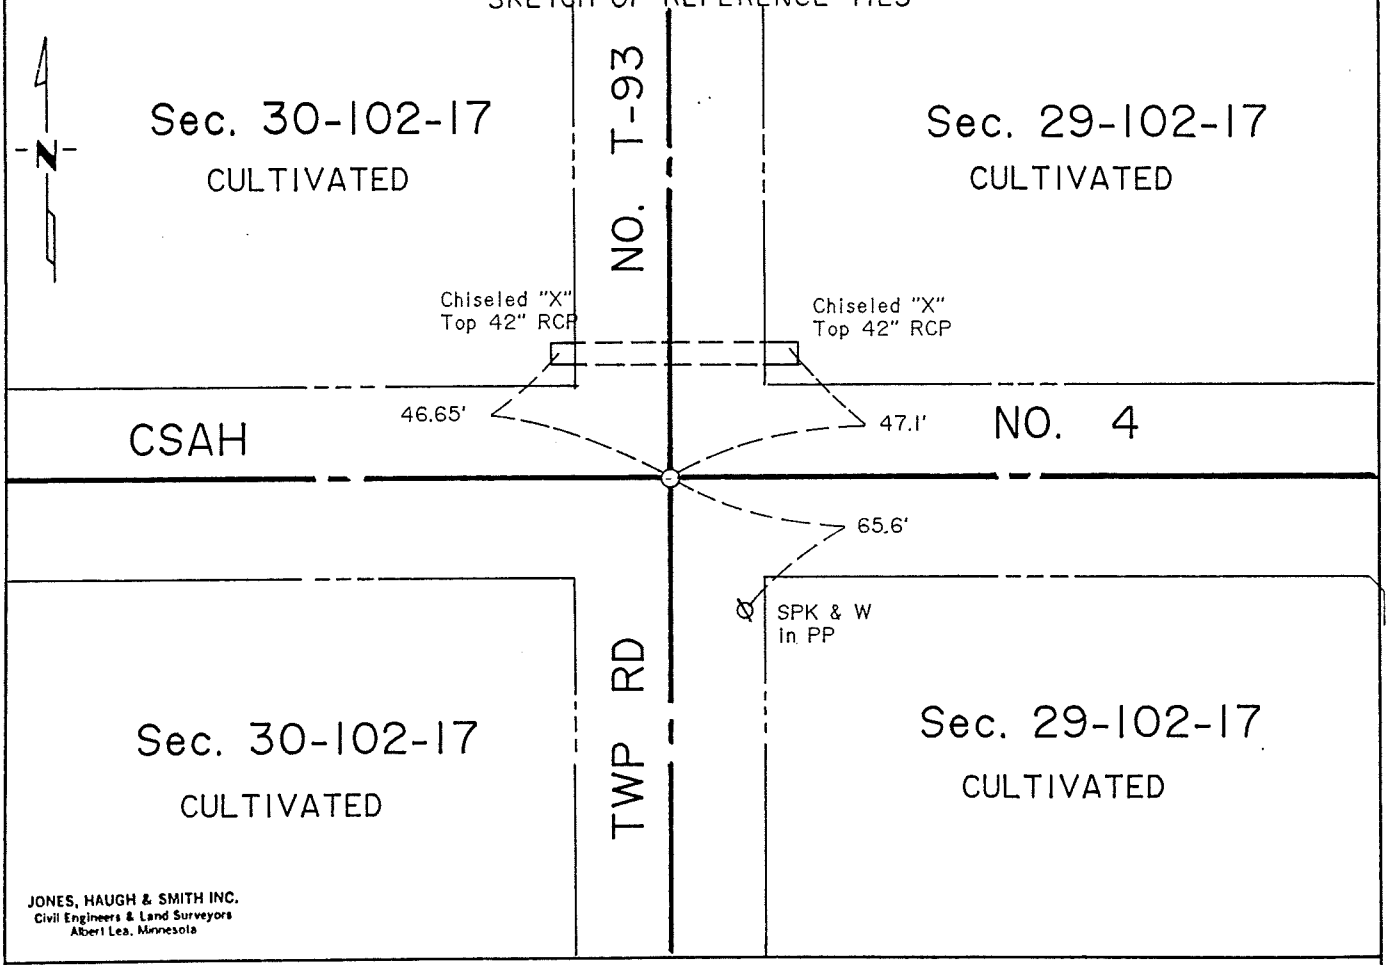

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-16-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Section 30-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:
10" Burr Oak N 20° W 60 links (399.3 ft)

The following were contacted for section information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner:

1888 Clausen Mower County Surveyor from 1880-1892 field notes show a post inplace and chaining notes are given.

Book "A" in the Mower County Engineering Office shows corners inplace as Station 108+47.0. The following ties were taken:
51.0' NE to 3rd fence post
48.2' NW to CFP
45.7 SW to NE corner concrete post
54.5' SW to telephone pole

1982 Jones, Haugh & Smith Inc crew uncovered a concrete monument at Sta. 108+47.0 on centerline roads. Ties were checked and all are still intact.

1985 Jones, Haugh & Smith Inc crew located monument for survey in NE 1/4 N 1/2 NE 1/4 Section 30-102-17.

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, dug with the County backhoe on centerline centerline of N-S-E-W roads for bituminous overlay project SAP 50-604-18. Dug a 5' x 14' x 6' deep hole and uncovered a 5/8" diameter iron 0.5' deep over a harrison cast iron monument 2 feet below road surface over a 2" square x 14" long wood stake. Continued digging and found no further evidence of the concrete monument noted in Book "A" or any other perpetuation of the original PLS corner. Placed a cast iron monument at the same location of the monument found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.