Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 20, Township 102N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 4-30-92 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-30-92 (DATE) placed a CONCRETE NAIL WASHER

SKETCH OF REFERENCE TIES

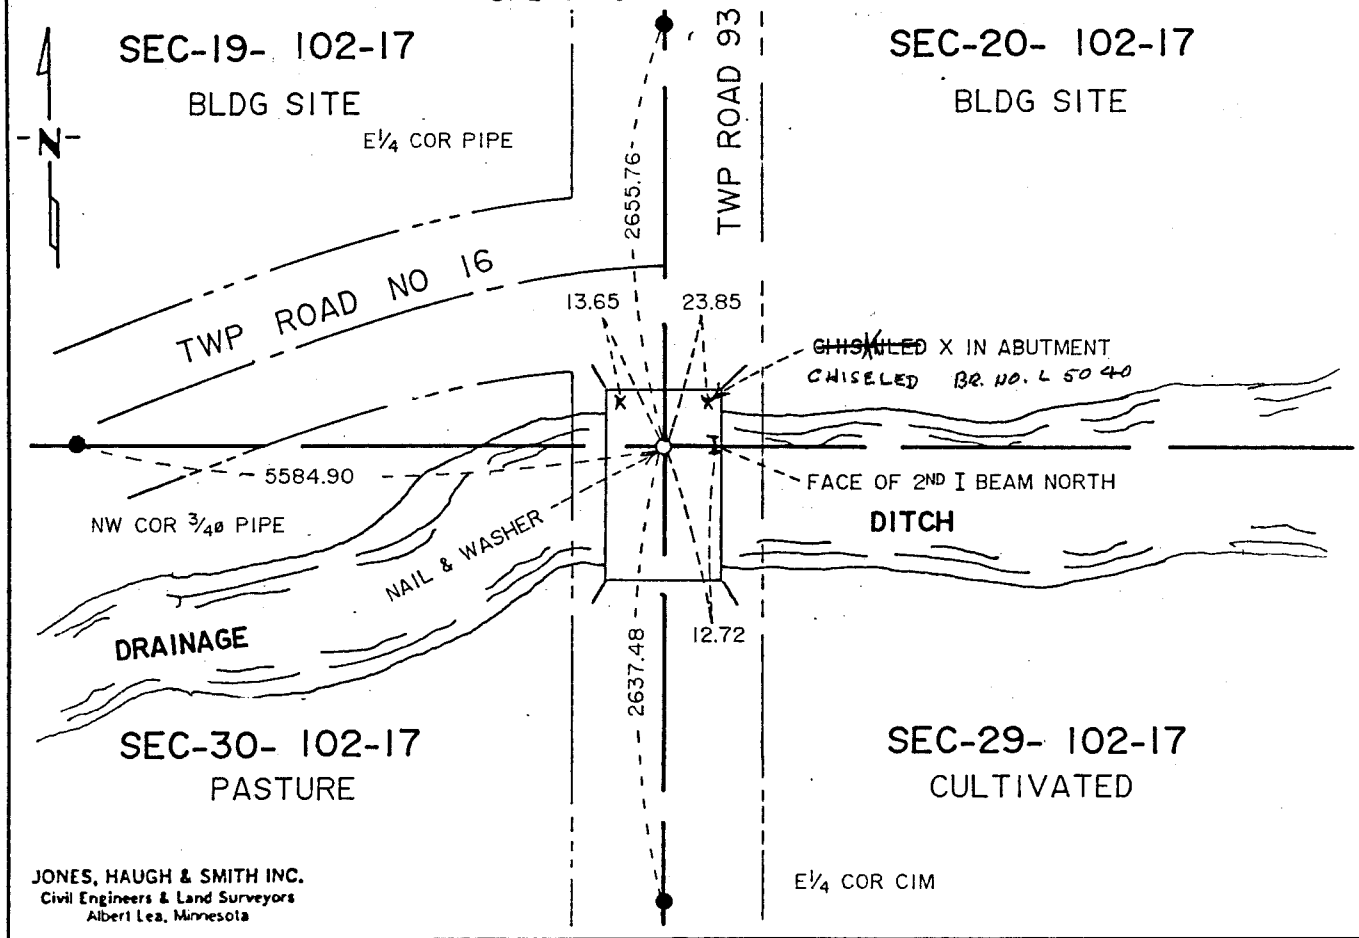

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 11-24-92 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 20-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following tie was taken:

Burr Oak	N 15° W	238 links (157.08 ft)
Burr Oak	N 55° E	174 links (114.84 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1992 Jones, Haugh & Smith Inc crew found no evidence of original public land survey corner or bearing trees. Established the corner using obliterated methods as follows: Used centerline of bridge at northeast corner to control east-west position of this corner. Measured north from E 1/4 corner of Section 30 to existing fence line west at northeast corner of the SE 1/4 NE 1/4 Section 30 and found a distance of 1318.74 feet. Doubled this distance and set temporary point on centerline of the bridge for northeast corner. Then measured north from this temporary point to field division west at northeast corner of the SE 1/4 SE 1/4 Section 19 and found distance of 1328 feet more or less. Continued measuring north to E 1/4 corner Section 19 and found 2655.76 feet. We also found the remains of old fence line east on south bank of creek which fits temporary point and the extended centerline of township road to west. Therefore we set concrete nail and washer at temporary point and took ties as shown and accepted this location as best location of the original public land survey corner using existing extrinsic evidence.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 30, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER

At the corner location shown on the sketch:


☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-30-92 (DATE) placed a conc. nail ℄ w in bridge deck

REVISED FROM CERTIFICATE DATED 12-12-88

SKETCH OF REFERENCE TIES

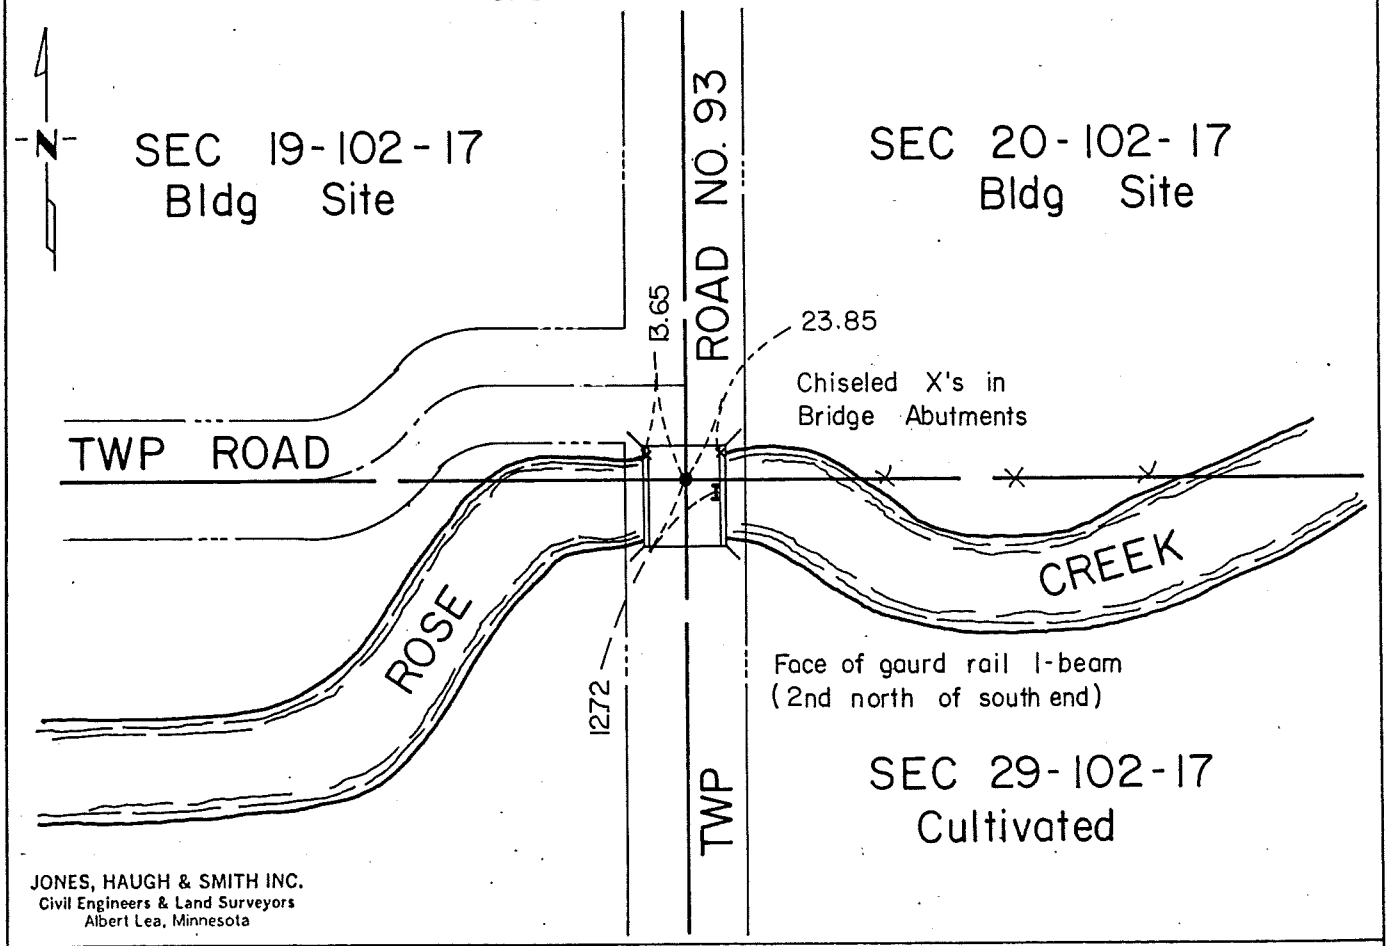

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 5-20-92 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Section 30-102-17

This corner was originally established by Deputy Surveyor Wm I. Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post and the following bearing trees were marked:

Burr Oak	N 15 1/2° W	238 links
Burr Oak	N 55° E	174 links

The following were contacted for section corner information:
Mower County Highway Dept

1985 Jones, Haugh & Smith Inc crew found no evidence of public land survey corner or a perpetuation thereof. Appears corner was destroyed by rechanneling of creek and bridge construction. Therefore established position of corner using obliterated methods.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 30, Township 102N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-7-85 (DATE) found a NO EVIDENCE OF CORNER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 8-7-85 (DATE) placed a conc. nail & W. in bridge deck

SKETCH OF REFERENCE TIES

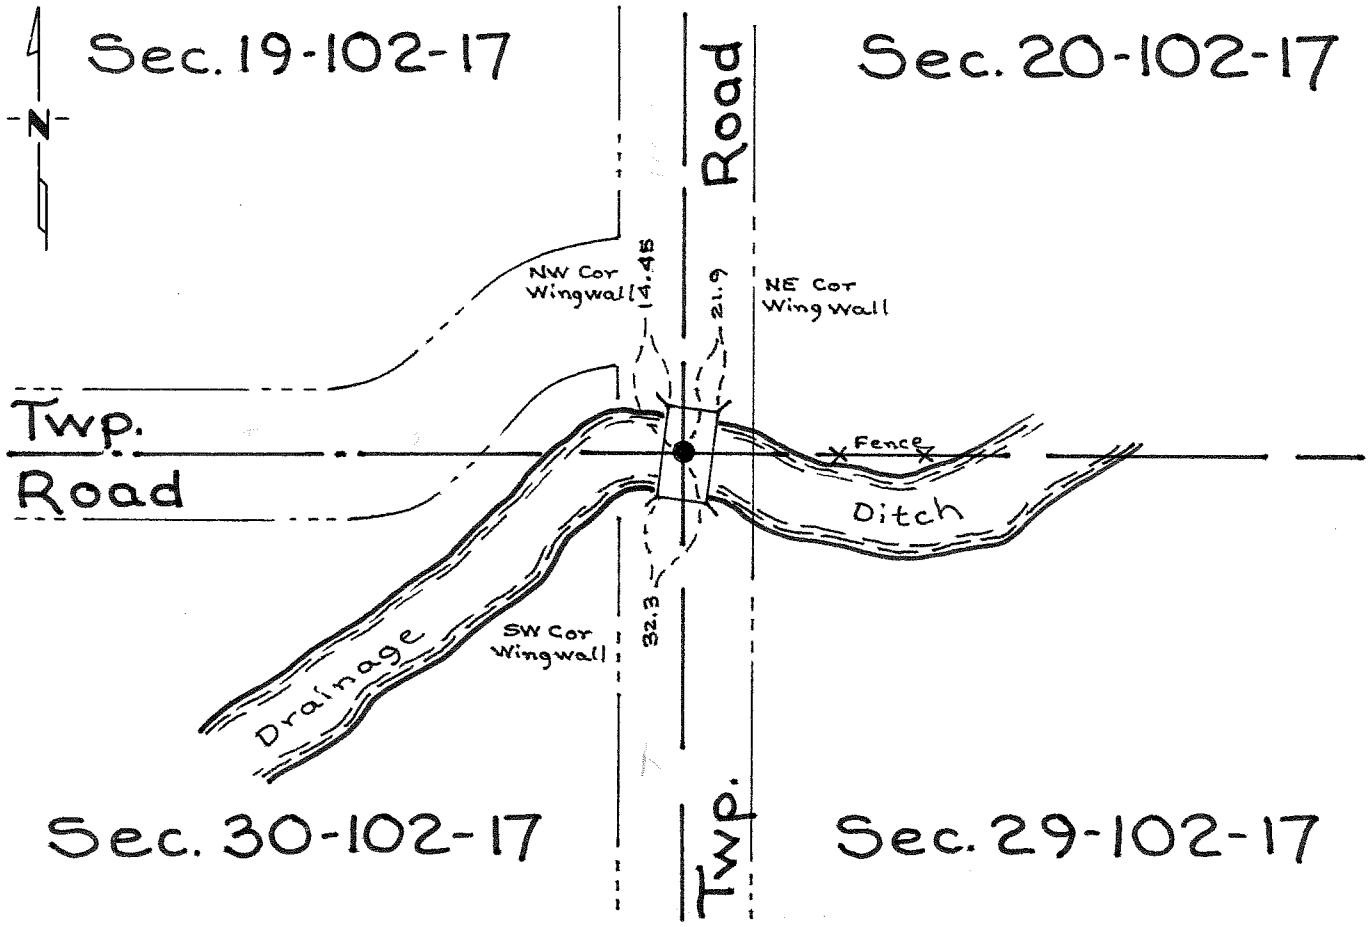

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-12-88

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
NE corner Section 30-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the US General Land Office in 1854. The government notes show this corner was marked with a wood post and the following bearing trees were marked:

9" Burr Oak	N $15\frac{1}{2}^{o}$ W	238 Links
7" Burr Oak	N 55^{o} E	174 Links

The following were contacted for section corner information:

Mower County Highway Department

1985 Jones, Haugh & Smith crew found no evidence of public land survey corner or a perpetuation of. Appears corner was destroyed by rechanneling of creek and bridge construction. Therefore established position of corner using obliterated methods.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith

"I" TIE BOOK p.54 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 30, Township 102N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 8-7-85 (DATE) placed a concrete nail & washer in bridge deck

SKETCH OF REFERENCE TIES

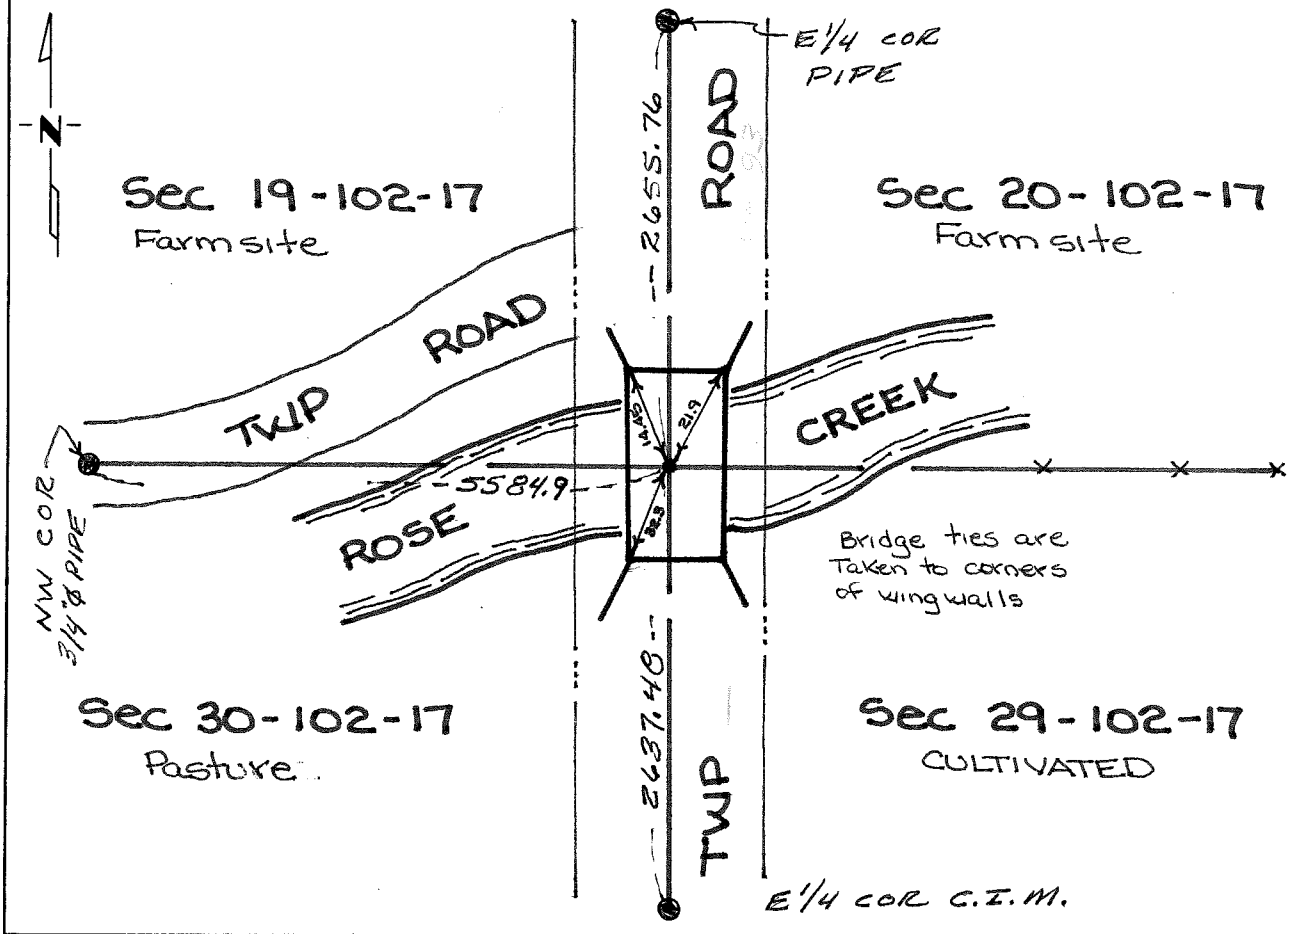

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John H. Schutt III
SIGNATURE

10-10-95
DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Section 30-102-17

1854 William I. Anderson, Deputy Surveyor, set wood post during public land survey.

1985 Jones, Haugh & Smith Inc survey crew found no evidence of original public land survey corner or bearing trees. Therefore established the corner using obliterated methods, as follows:

Used centerline of bridge at northeast corner to control east-west position since it fit centerline of roads to north and south.

Measured north from E¼ corner Section 30 to existing fence line west at northeast corner of the SE¼ NE¼ Section 30 and found a distance of 1318.74 feet. Doubled this distance and set temporary point on centerline of bridge for northeast corner. Then measured north from temporary point to field division west at northeast corner of the SE¼ SE¼ Section 19-102-17 and found distance of 1328 feet more or less. Continued measuring north to E¼ corner Section 19, and found 2655.76 feet.

Found remains of old fence line east on south bank of creek, which fits temporary point and extended centerline of township road to west and found that it checked with temporary point.

Found that temporary point fits existing fence lines, field division and road centerlines. Therefore we set concrete nail and washer at temporary point and took ties as shown; and accepted this location as best of location of the original public land survey corner using existing extrinsic evidence.