Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 27, Township 102N, Range 17W, 5th P.M.

TATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-9-91 (DATE) found a harrison cast iron monument 1' below road surface over a 5"Ø concrete monument with 1/2"Ø iron in center.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-9-91 (DATE) placed a cast iron monument on road surface over concrete monument found.

SKETCH OF REFERENCE TIES

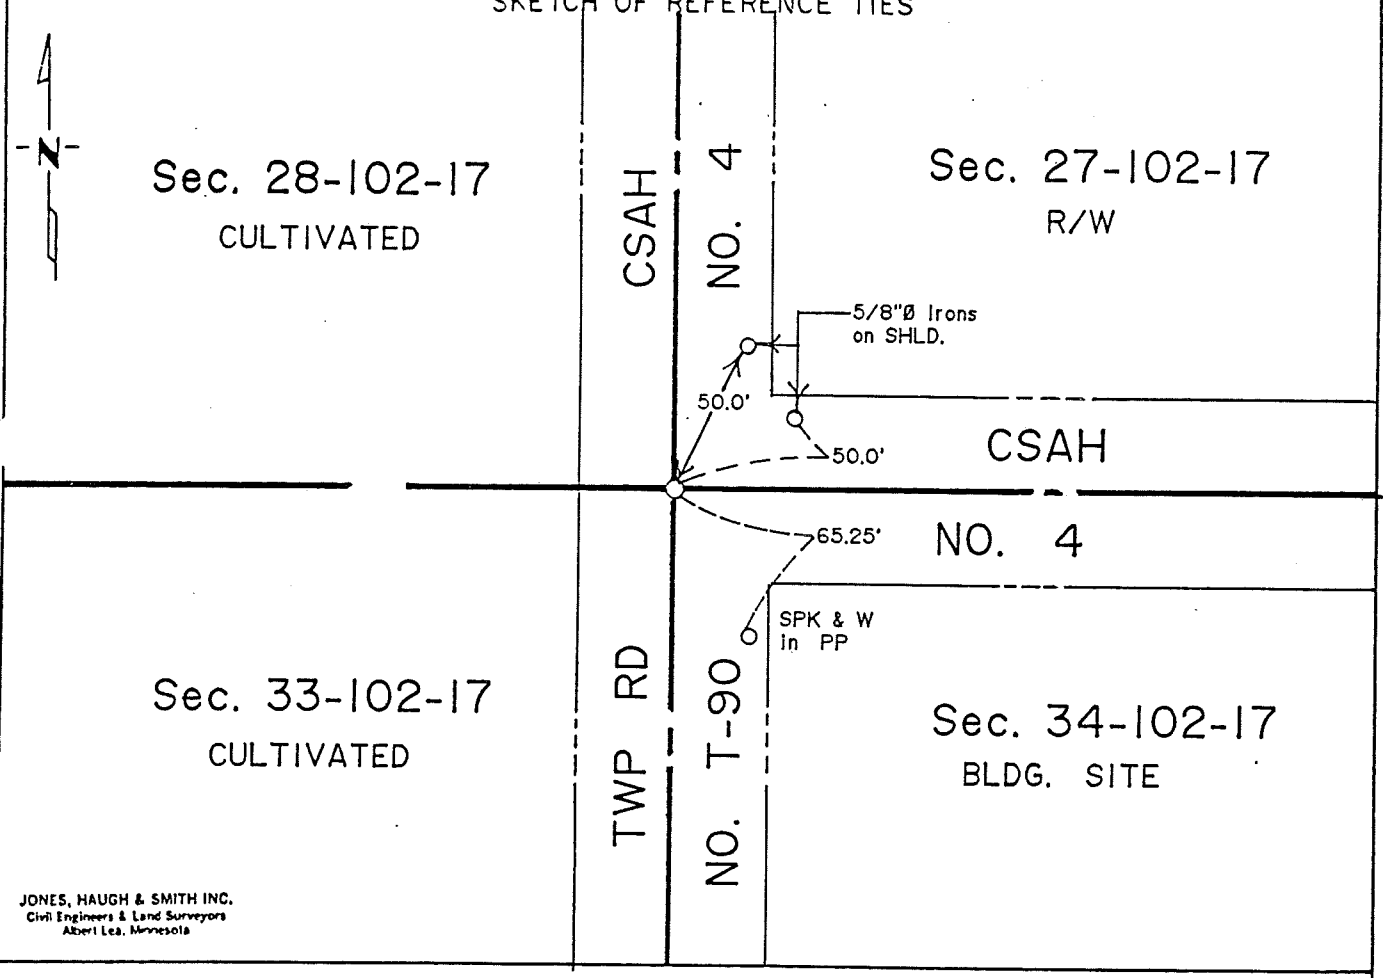

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-16-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec 27-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post and charred stake were set with a mound of earth and trench.

The following were contacted for section information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1890 Clausen, Mower County Surveyor 1880-1892, field notes show a government post inplace.

1930 Book "A" in the Mower County Engineering Office shows a corner inplace at Sta 240+59.3. The following ties were taken:

48.3' SE to CFP
32.5' W to "Big 4" rock
64.5' SW to Oak tree

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte IV, dug with the County backhoe on centerline of north-south-east road for bituminous overlay project SAP 50-604-18. Dug a 4'x8'x6' deep hole and uncovered a harrison cast iron monument 1.0 feet below the surface. Continued digging and found a 5" diameter concrete monument with a 1/2" diameter iron center 3 feet deep in virgin soil. Placed a cast iron monument on road surface over the concrete monument found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.