Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 27, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-9-91 (DATE) found a large pointed field stone 4' deep in virgin soil on ℄ of E-W road

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-9-91 (DATE) placed a 5/8"Ø iron on West side of stone found and a cast iron monument over at road surface.

SKETCH OF REFERENCE TIES

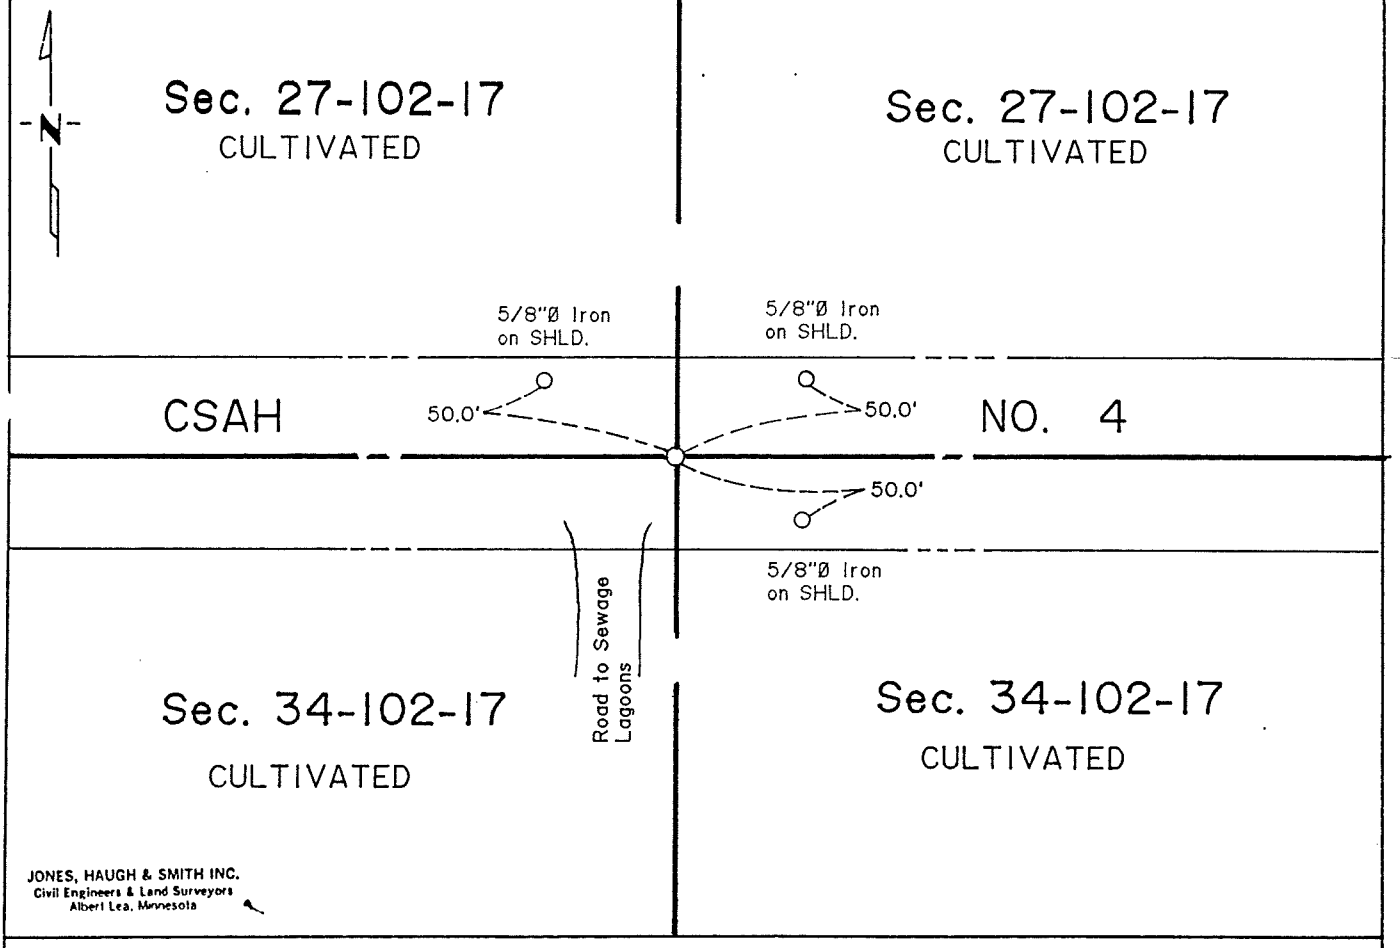

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-16-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Section 27-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post and a charred stake were set with a mound of earth and trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner:

1890 Clausen, County Surveyor 1880-1892, field notes show a government post inplace.

1930 Book "A" in the Mower County Engineering Office shows a corner inplace at Sta. 204+59.3. The following ties were taken:

48.3' SE to CFP
32.5' W to "Big 4" Rock.
64.5' SW to Oak tree.

1991 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte, dug with the Mower County backhoe on centerline of E-W road for bituminous overlay project #SAP 50-604-18. Dug a 4' x 20' x 4' deep hole and 4 feet more or less East of midpoint. Uncovered a large pointed field stone in virgin soil. Continued digging and found no further evidence of PLS corner. Placed a 5/8" diameter x 18" long iron on the west side of the stone and set a cast iron monument over stone on road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.