Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 27, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-9-91 (DATE) found a railroad spike flush with surface over a harrison monument 3' deep.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-9-91 (DATE) placed a cast iron monument on road surface at same location of monument found.

SKETCH OF REFERENCE TIES

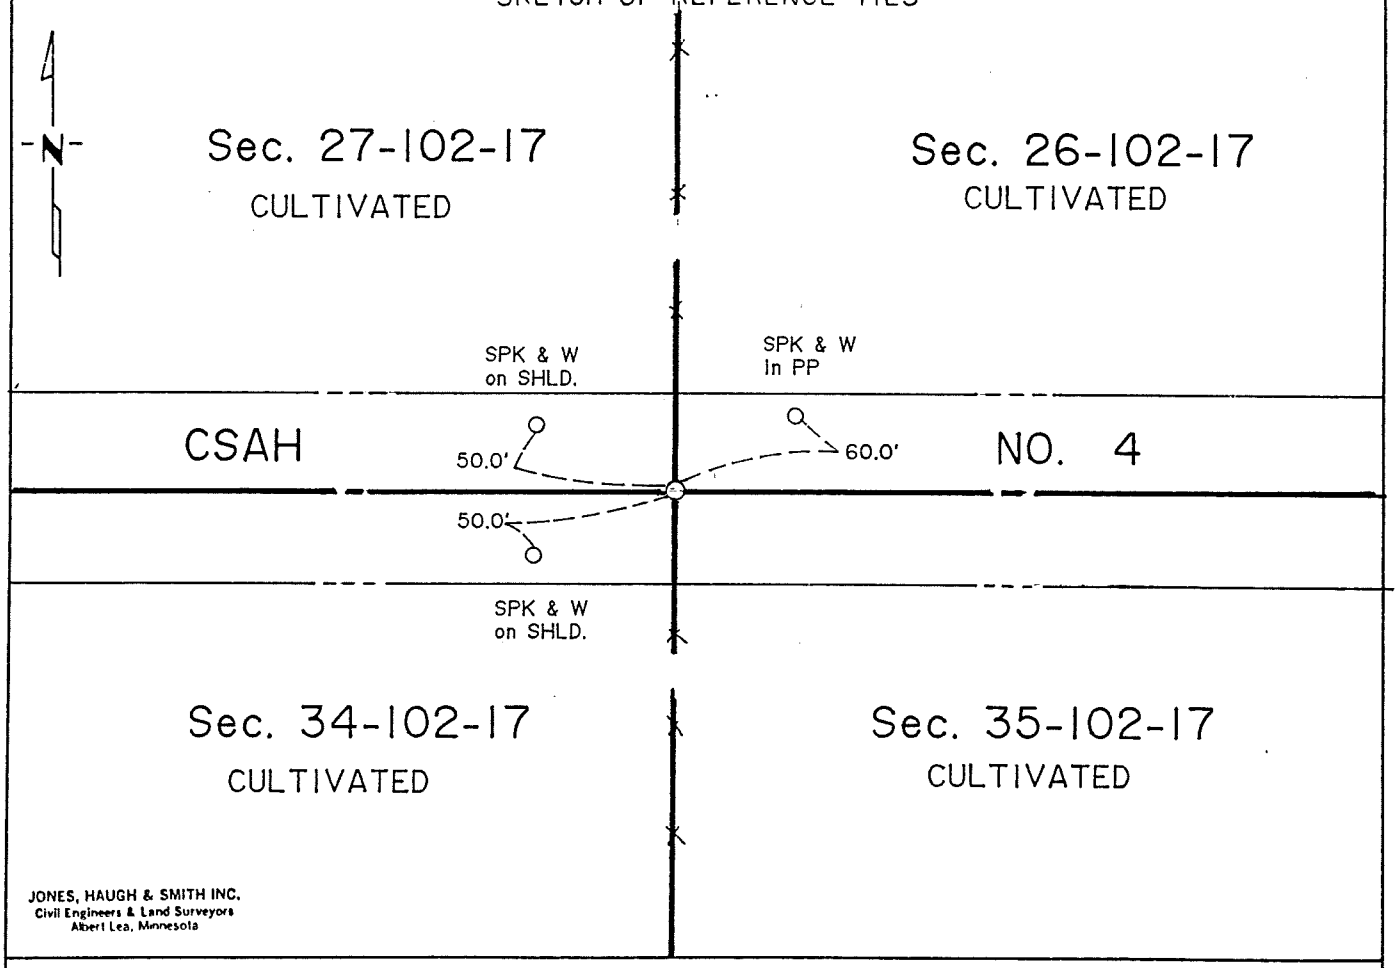

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ SIGNATURE 5-16-91 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Section 27-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post and a charred stake were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1890 Clausen, County Surveyor 1880-1892, field notes show a Government post inplace.

1892 Clausen field notes show a stone inplace.

1976 Jones, Haugh & Smith Inc crew placed a P.K. nail on centerline of E-W road in line with N-S fence.

1977 Jones, Haugh & Smith Inc crew uncovered a railroad spike during a survey E 1/2 SW 1/4 in Section 26-102-17.

1984 Jones, Haugh & Smith Inc crew during a survey in SE 1/4 SW 1/4 Section 26-102-17 uncovered a railroad spike flush with surface on centerline of E-W road in line with N-S fences.

1991 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte, dug with the Mower County backhoe at location of railroad spike flush on centerline of E-W road in line with N-S fences for bituminous overlay SAP 50-604-18. Dug a 4' x 8' x 5' deep hole and found the lower portion of a harrison cast iron monument 3.0' below the surface. Continued digging and found no further evidence of public land survey corner. Placed a cast iron monument on road surface at the same location as the monument found.

The monument fits and agrees with past records and occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.