Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 26, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-9-91 (DATE) found a 5/8"Ø iron over a harrison monument over a 2"x1/4"x30" long iron bar 4' deep in virgin soil.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-9-91 (DATE) placed a cast iron monument on road surface over iron bar found.

SKETCH OF REFERENCE TIES

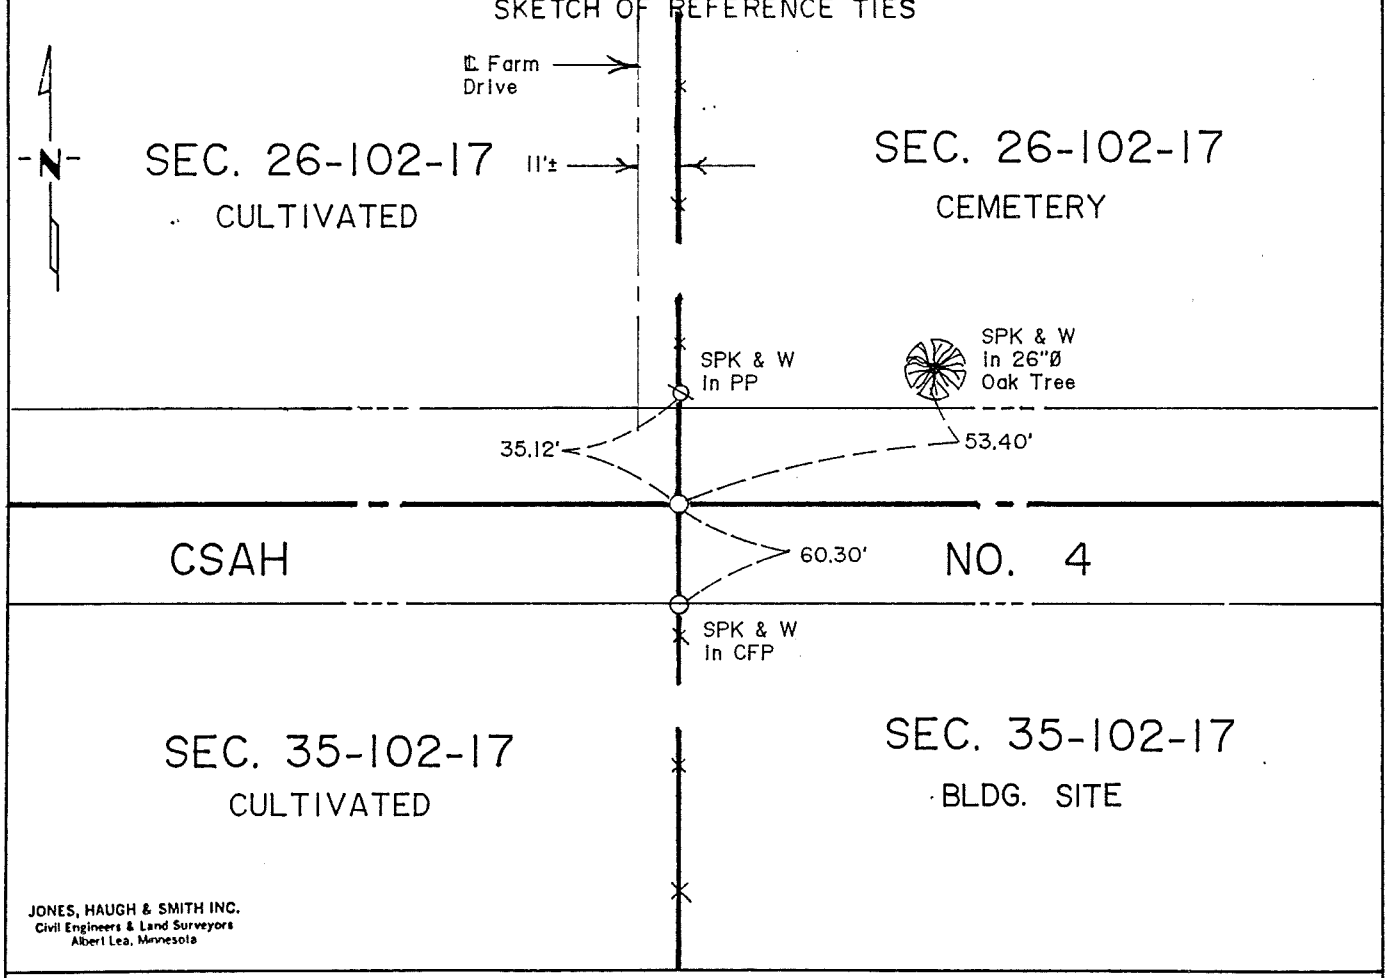

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 5-16-91
SIGNATURE DATE

Registration No. 13607

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Section 26-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

8" Burr Oak	N 65° E	80 links (52.8 ft)
6" Burr Oak	S 10° E	95 links (62.7 ft)

The following were contacted for section information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner:

1892 Clausen, Mower County Surveyor 1880-1892, field notes show inplace a 26" x 1 1/4" x 1/2" iron and a government post 9.4' north of a straight line.

1976 Jones, Haugh & Smith Inc crew used County ties to locate corners. Placed a P.K. nail on centerline of E-W road in line with fence south.

1977 Jones, Haugh & Smith Inc crew uncovered a cast iron monument. Placed a 5/8" diameter iron over monument found.

1977 Jones, Haugh & Smith Inc crew found a 5/8" diameter iron during survey in E 1/2 SW 1/4 in Section 26-102-17.

1984 Jones, Haugh & Smith Inc crew found a 5/8" diameter iron 0.3' below surface on centerline of E-W road in line with fence south.

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, dug with the Mower County backhoe on centerline of E-W road in line with N-S fences for bituminous overlay project SAP 50-604-18. Dug a 4' x 6' x 5' deep hole and found a 5/8" diameter iron 0.5' deep over a harrison cast iron monument 2' below road surface. Continued digging and uncovered a 2" x 1/4" x 30" long iron bar 4' deep in virgin soil. Set a cast iron monument on road surface over iron bar.

The monument fits and agrees with past records and occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.