Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 1, Township 102N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7/27/1989 (DATE) placed a JHS CREW SET 3/4" PIPE 12' EAST OF P.I.

SKETCH OF REFERENCE TIES

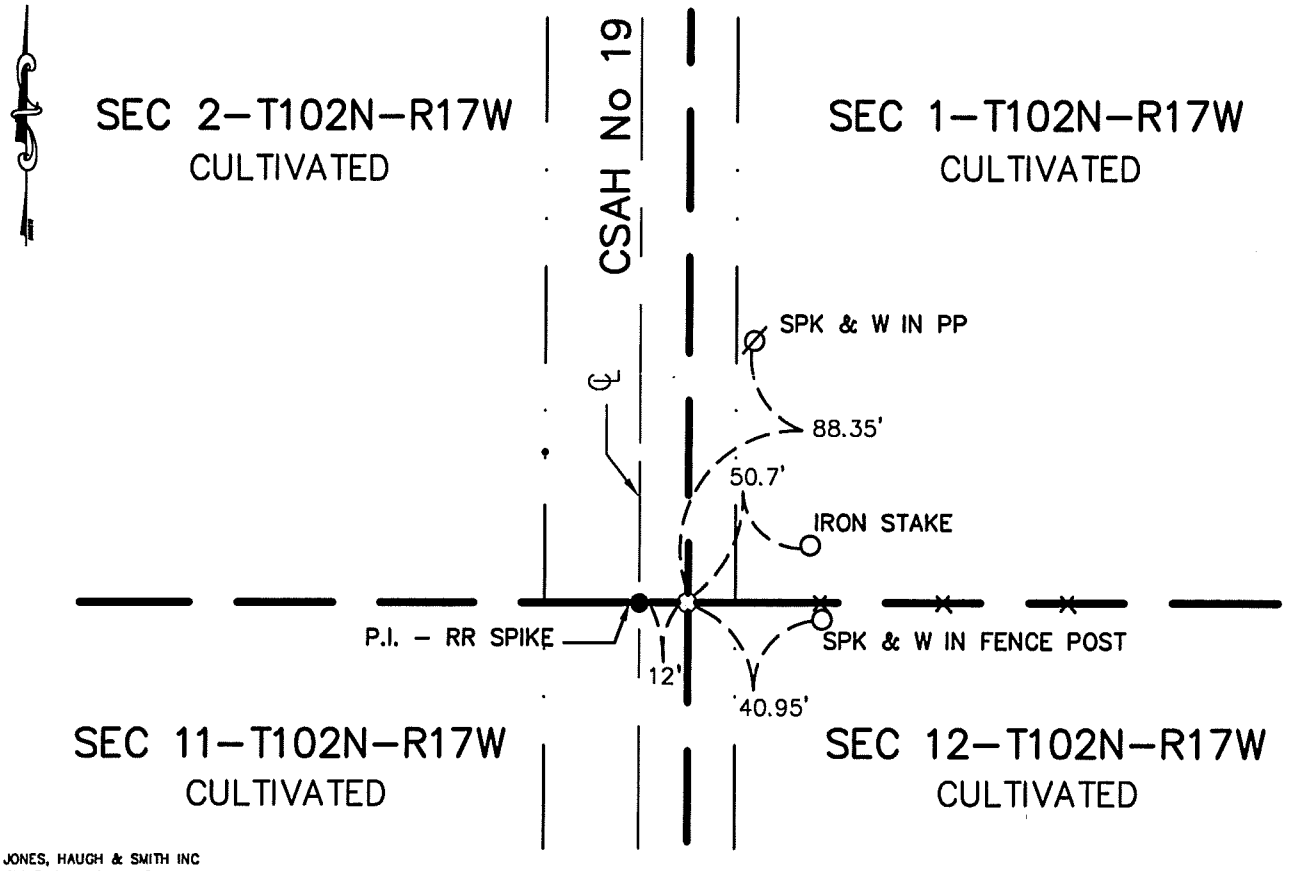

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 3-1-00 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SW Cor Sec 1-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Minnesota Dept. of Transportation
Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1989 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, Set a ¾" pipe 12' East of P.I. in accordance with Mower Co. Hwy Dept. records, and MN. Dept. of Transportation records of I-90 R/W map. Took new ties.

2000 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, uncovered a ¾" pipe 12' East of P.I. of CSAH #19. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 4, Township 102N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 04/02/1976 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 04/02/1976 (DATE) placed a 5/8" IRON

SKETCH OF REFERENCE TIES

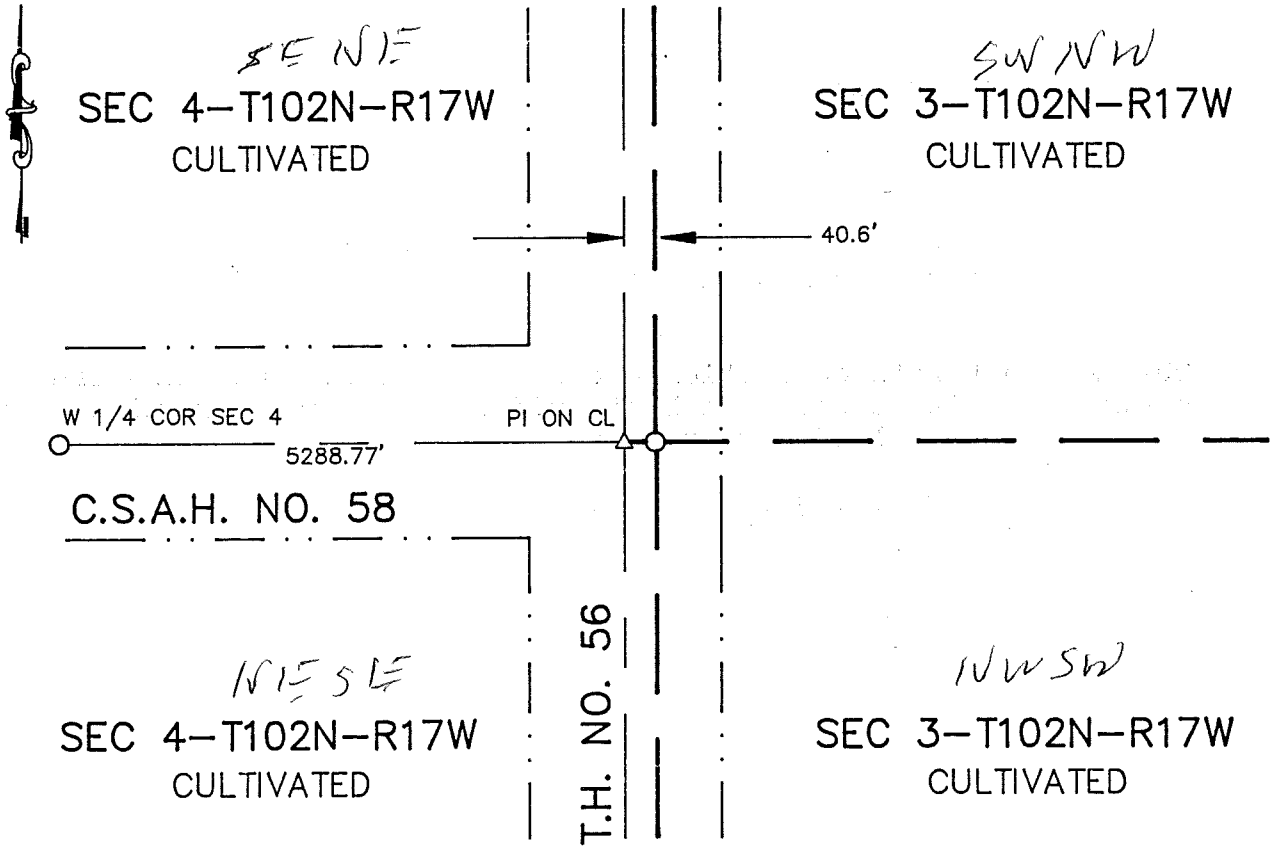

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] 7-9-96
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER 446233
County of Mower

I hereby certify that this document was filed in the County Rec. office at 1 P .M. on the 10th day of July A.D., 1996

COUNTY RECORDER Charles Engen
By Cheryl A Taylor, Deputy
DOCUMENT NO. 446233

M.H.D. FORM NO. 2105

Book 91 Page 488

E 1/4 Cor SEC 4-102-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, placed a 5/8" iron using notes for CSAH No. 58 and TH No. 56 R/W plan.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 5, Township 102N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 04/25/2000 (DATE) found a MOWER CO. HWY. DEPT. ALUMINUM MONUMENT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

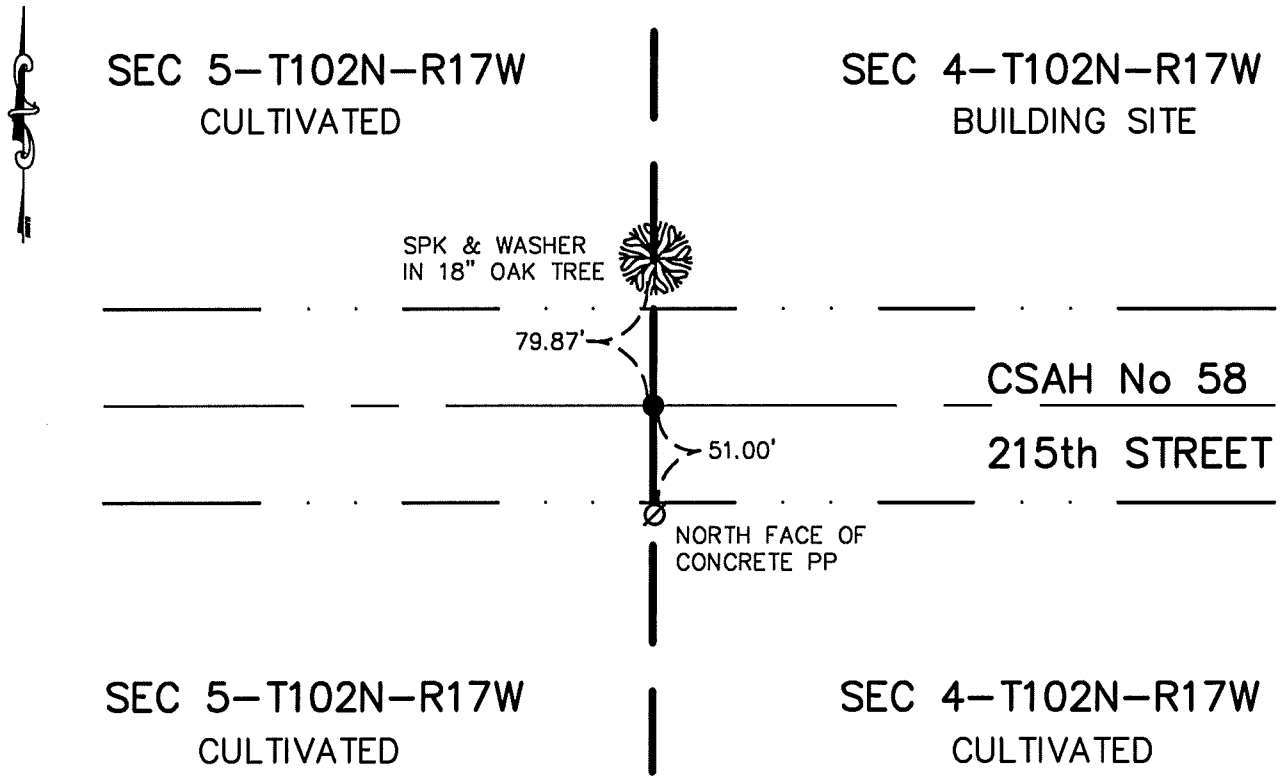

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 5-16-00 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

E 1/4 Cor Sec 5-102-17

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1957 Mower County records state an iron was in place.

1973 Mower Co. Highway Dept. personnel located this corner during regrading project, and reset it after grading project was completed.

1976 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found a RR spike at this location.

1993 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found an aluminum monument at this location.

2000 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found an aluminum monument at this location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 5, Township 102N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 04/25/2000 (DATE) found a MOWER CO. HWY. DEPT. ALUMINUM MONUMENT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

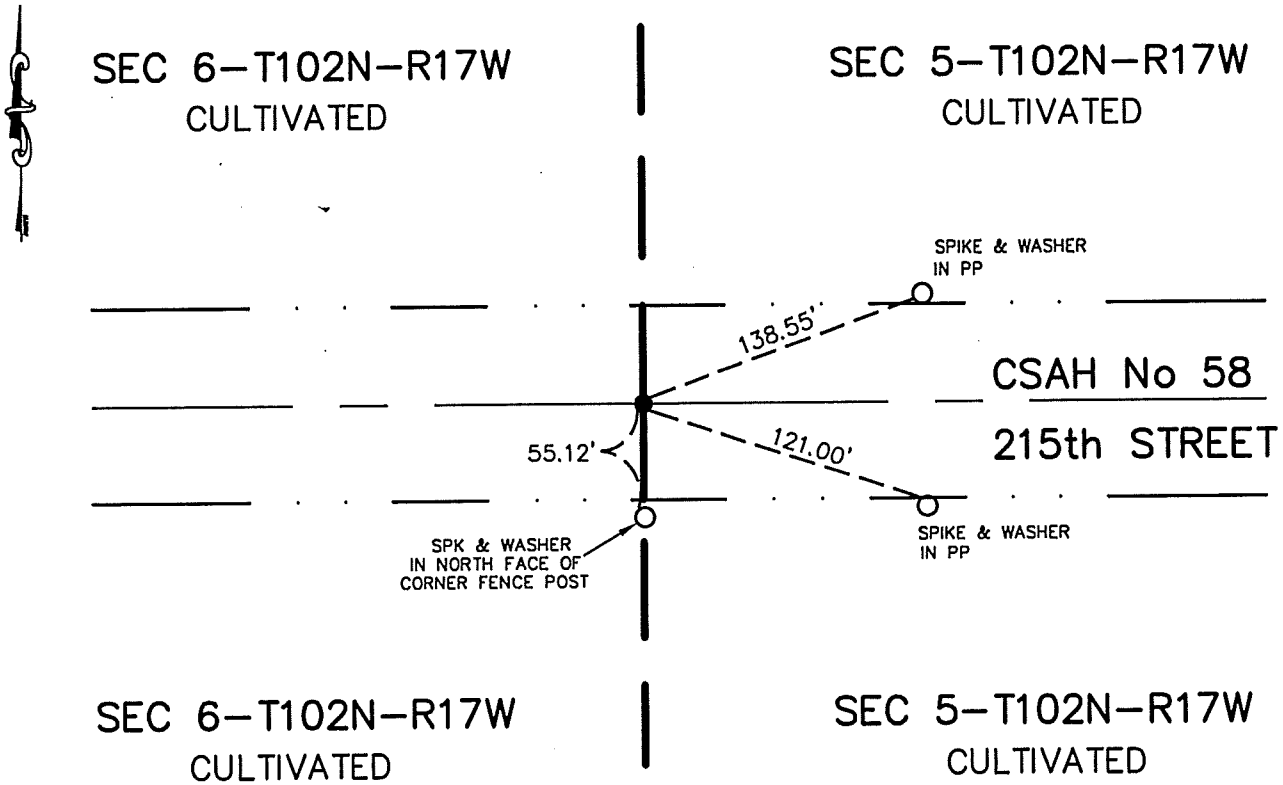

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 5-16-00 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

W 1/4 Cor Sec 5-102-17

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1957 Mower County records state an iron was in place.

1973 Mower Co. Highway Dept. personnel located this corner during regrading project, and reset it after grading project was completed.

1993 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found an aluminum monument at this location.

2000 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found an aluminum monument at this location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 25, Township 102N Range 17W, 5th P.M.


STATE OF MINNESOTA, County of MOWER

At the corner location shown on the sketch

☐ On 09/06/2000 (DATE) found a FIELD STONE, 2.5' BELOW ROAD SURFACE
SET A 5/8"X16" IRON WITH C.I.M OVER STONE, 0.40' BELOW ROAD SURFACE
☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

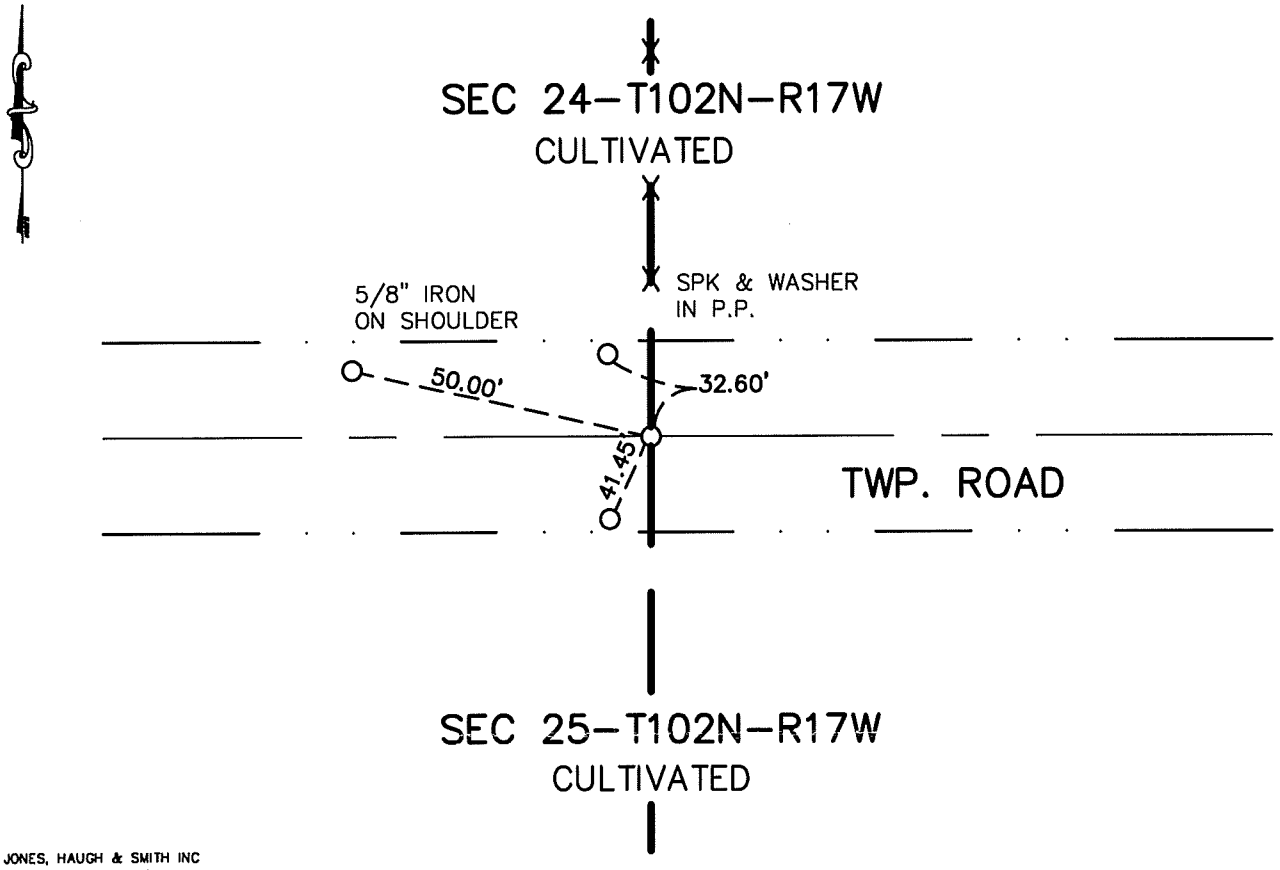

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 9-21-00
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer
☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____
By _____, Deputy
DOCUMENT NO. _____

M.H.D. FORM NO. 2105

N 1/4 Cor Sec 25-102-17

Deputy Surveyor William I. Anderson of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

2000 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Mower County backhoe, at the intersection of Twp. Road centerline and fence line North. Uncovered a field stone 2.5′ below road surface, in line with fence and road centerline. Accepted stone as a true perpetuation of the original corner, and set a capped 5/8″ iron on West side of stone. Set a 5/8″x16″ iron with C.I.M. 0.40′ below road surface. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 25, Township 102N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/06/2000 (DATE) found a 3/4" IRON WITH ALUMINUM MONUMENT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

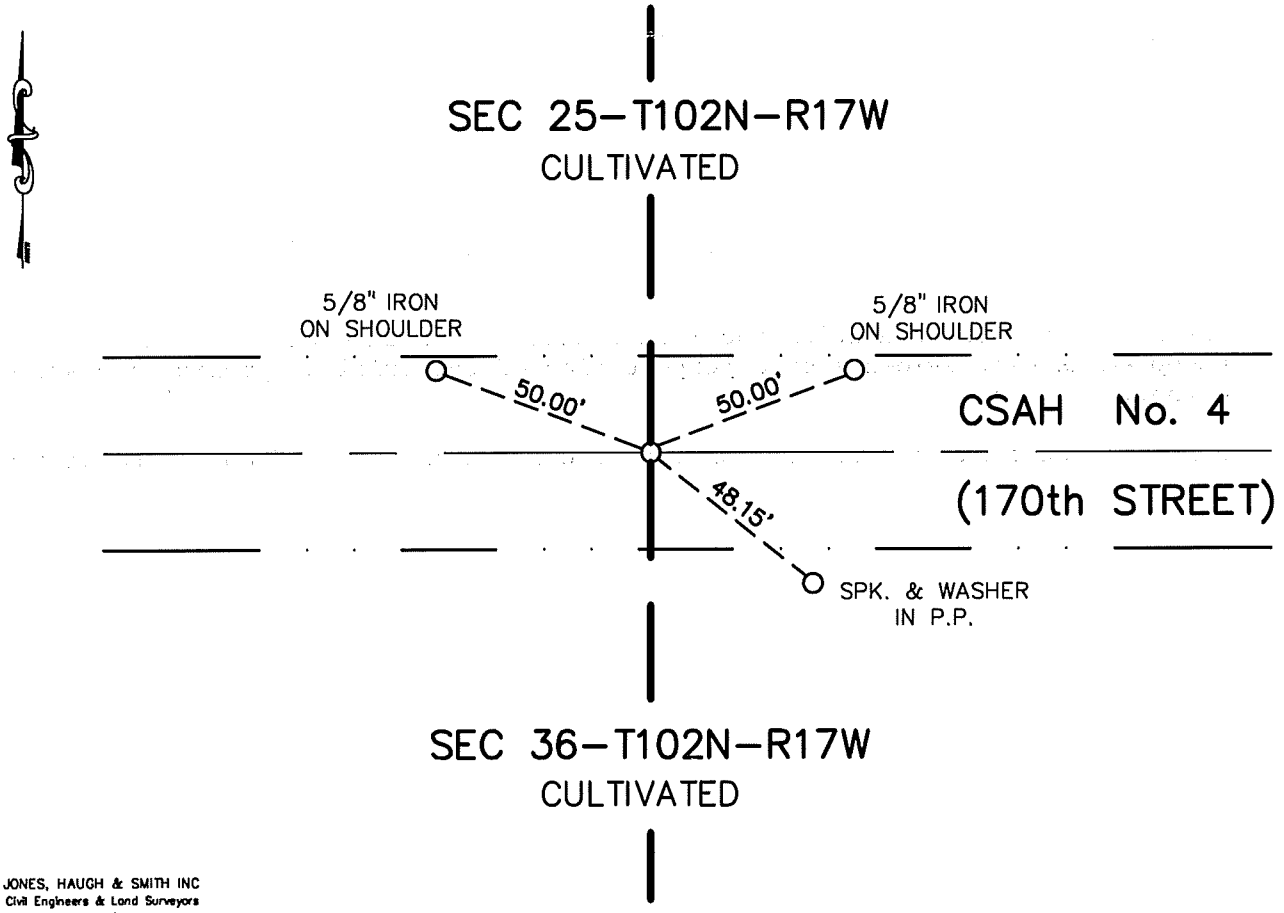

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 9-21-00
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

S 1/4 Cor Sec 25-102-17

Deputy Surveyor William I. Anderson of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

2000 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Mower County backhoe, on centerline of CSAH No. 4 and inline with line fence north. They uncovered a ¾" iron with an aluminum monument. Raised monument to road surface. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 5, Township 102N, Range 17W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 9-4-90 found 1" BAR (REMOVED DURING EXCAVATION)

☐ left monument as found, ☐ lowered monument, ☒ removed monument (explain)

On 9-4-90 placed 5/8" BAR AND COUNTY CAP

SKETCH OF REFERENCE TIES

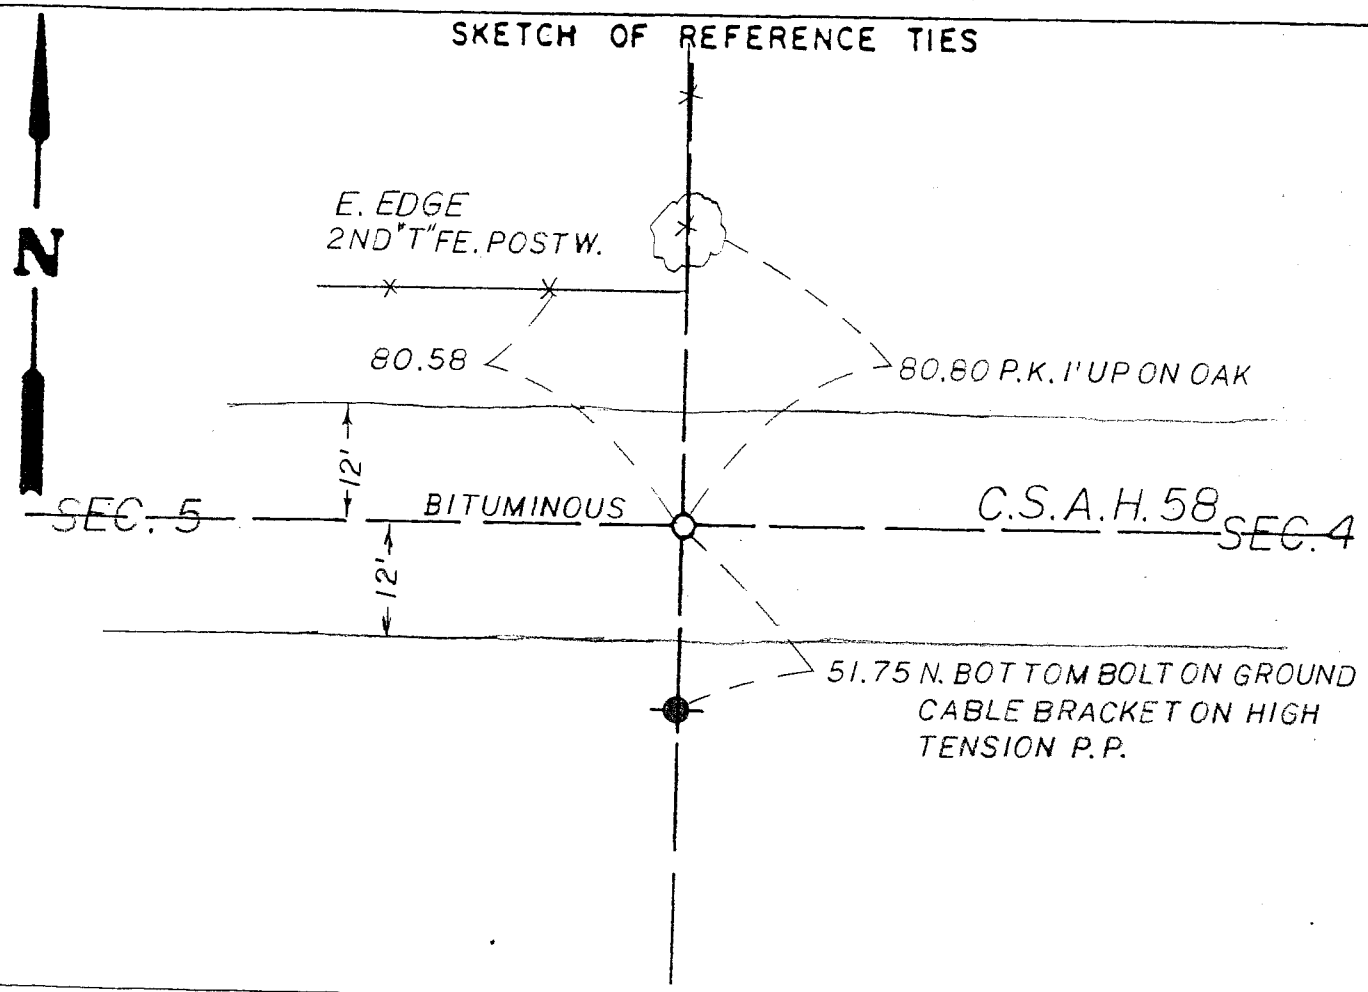

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
11-6-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE

East Quarter Corner Section 5, Township 102 North, Range 17 West, 5th P.M.

September, 1854	William Anderson, Deputy Surveyor, set post at quarter section corner during the original Public Land Survey. Page 20 of Surveyors Record shows inplace square top stone.
1957	Page 20 of Mower County Surveyors Record shows in place iron rod.
February 21, 1957	Minnesota Department of Highways Right-of-Way Map and Land Tie Notes of Interstate 90 shows iron pipe in place 1598.7 south of northeast corner of section 6.
1972	Mower County Engineer's Plan show in place concrete monument over stone.
September 4, 1990	Zenk Read Trygstad & Associates, Inc. excavated with a backhoe 2.5 feet North to 2.2 feet South of center line and 6 feet East to 5 feet West of fence line North and 4.5 feet deep and found a 1/2 inch bar 2.8 feet below the surface. The possible location of the concrete monument was evidenced by soil discoloration 2' below the surface. No exact location could be determined. A badly bent 5/8" rebar was found just below the bituminous surface. No exact location could be determined. An analysis of the record shows no indication of the origin of the bar. The bar is accepted as marking the location of the original Public Land Survey Corner.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 6, Township 102N, Range 17W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 9-4-90 found 1/2" BAR (REMOVED DURING EXCAVATION)

☐ left monument as found, ☐ lowered monument, ☒ removed monument (explain)

On 9-4-90 placed 3/4" REBAR AND COUNTY CAP

SKETCH OF REFERENCE TIES

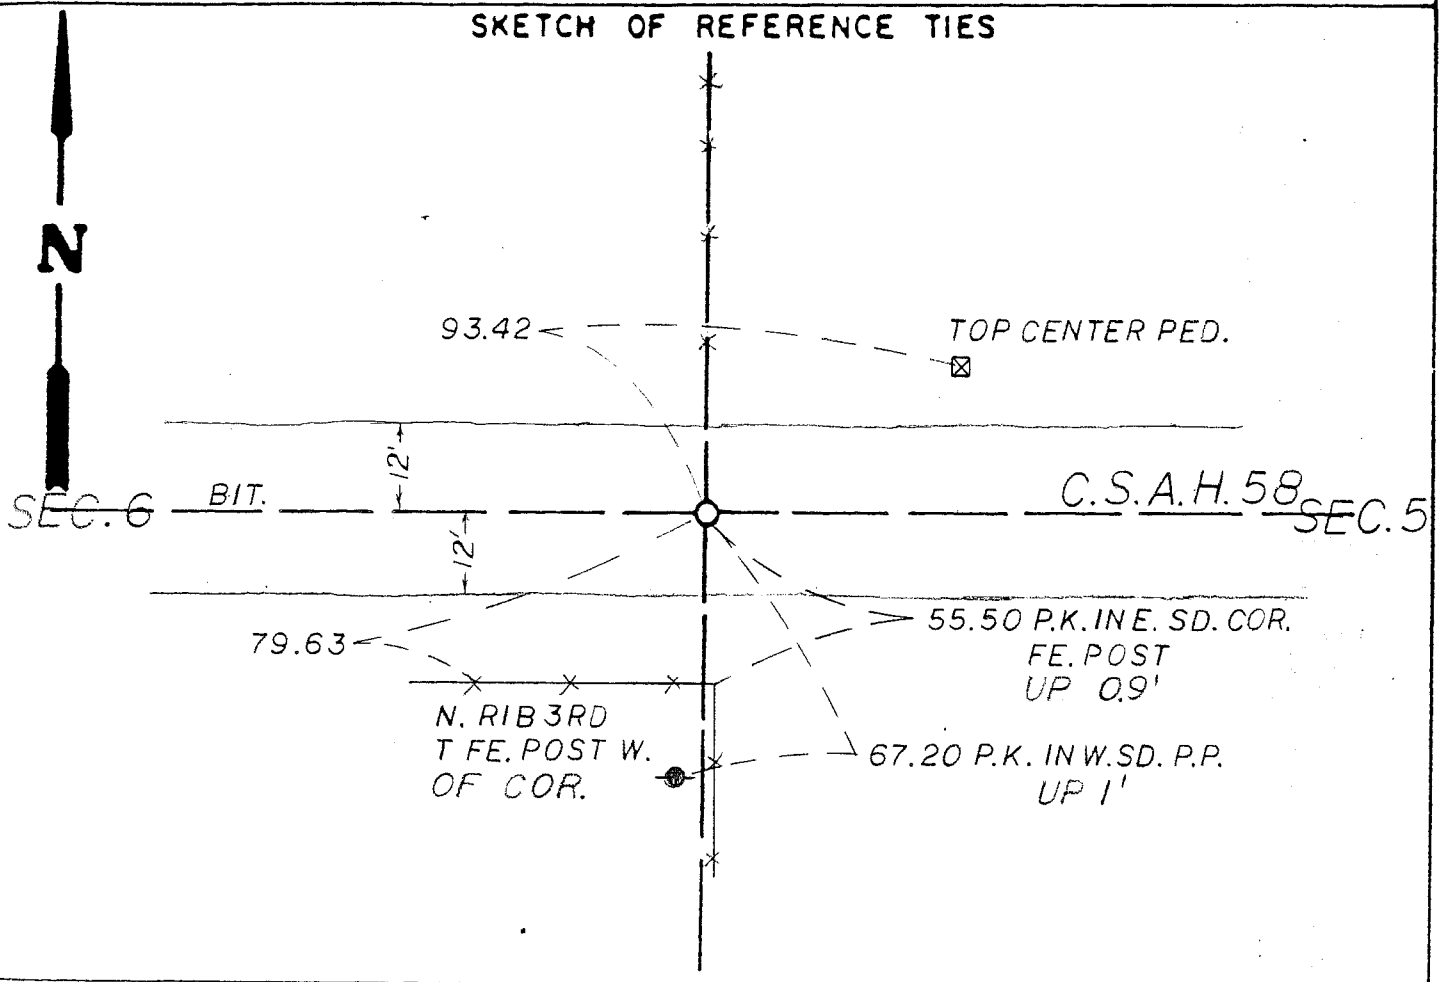

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald A. Olson — Signature

11-6-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer

☐ County Surveyor ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the _____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE

East Quarter Corner Section 6, Township 102 North, Range 17 West, 5th P.M.

September, 1854	William Anderson, Deputy Surveyor, set post at quarter section corner during the original Public Land Survey.
1957	Page 20 of Mower County Surveyors Record shows ties to monument.
1972	Mower County Engineers Plans show ties to monument.
September 4, 1990	Zenk Read Trygstad & Associates, Inc. excavated with a backhoe, a trench 4 feet North to 3 feet South of center line and 4 feet west to 4 feet east of the fence line to the North and 4.5 feet deep and found a 1" bar 2.8 feet below the surface on center line. An analysis of the record shows no indication of the origin of the bar. The bar agrees with the occupation lines and has been maintained by the County as the corner for over 33 years. The bar is accepted as marking the location of the original Public Land Survey Corner.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CENTER QUARTER Corner of Section 6, Township 102N, Range 17W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 9-4-90 found 1/2" REBAR LYING HORIZONTAL (REMOVED DURING EXCAVATION)

☐ left monument as found, ☐ lowered monument, ☒ removed monument (explain)

On _____ placed NOTHING

SKETCH OF REFERENCE TIES

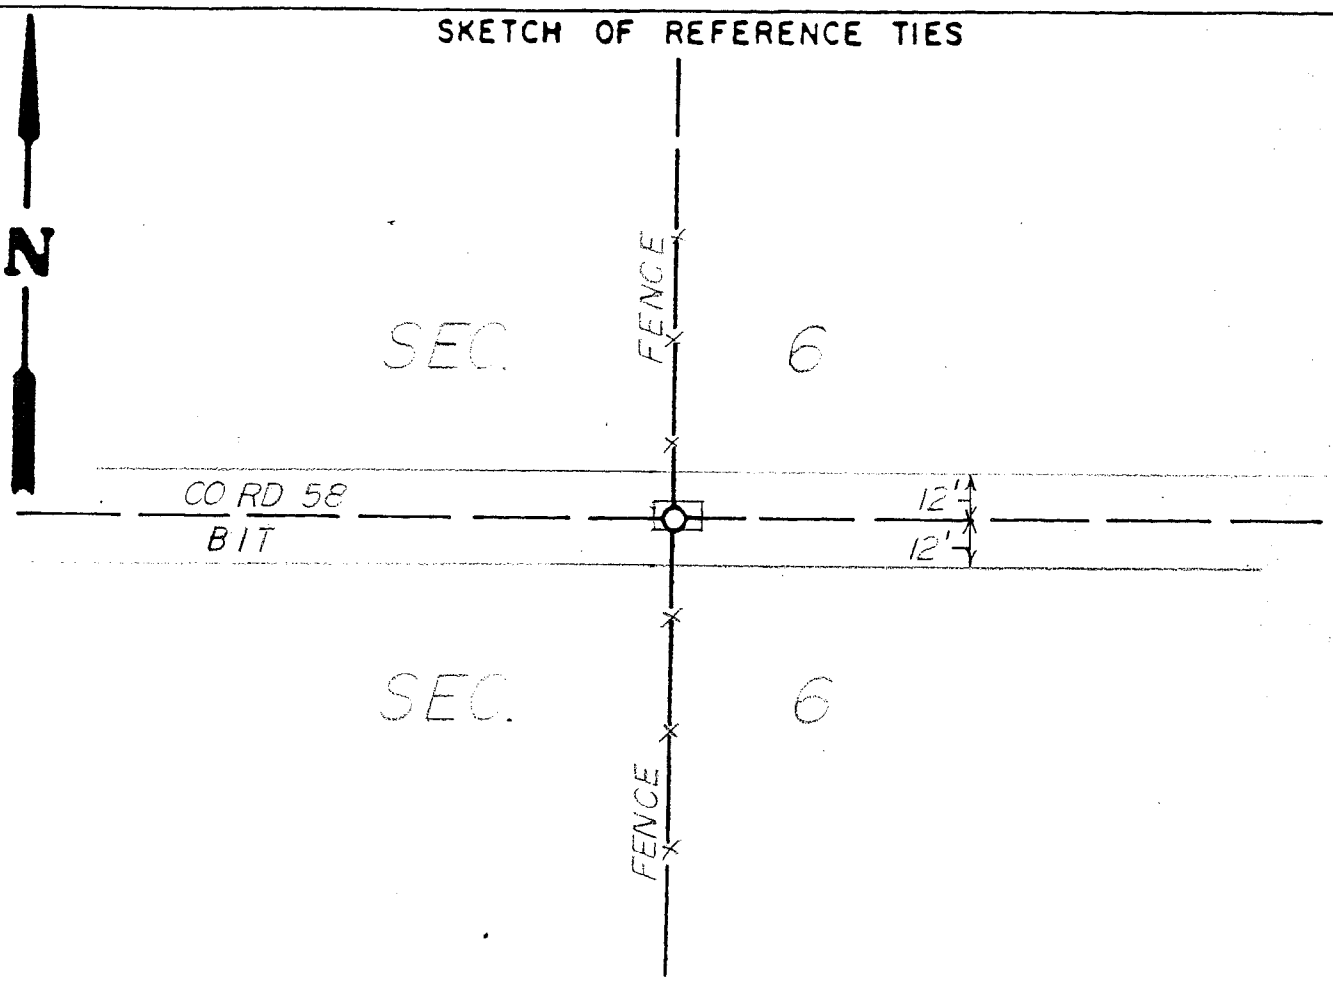

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
11-6-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the _____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE

Center Quarter Corner Section 6, Township 102 North, Range 17 West, 5th P.M.

1972	County Highway Engineer's plans give no indication of monumentation.
September 4, 1990	Zenk Read Trygstad and Associates excavated with a backhoe through the bituminous pavement 1.8 feet North to 1.2 feet South of County Road 58 centerline by 2 feet East to 3 feet West of the fence line North by 3.7 feet deep and found a mangled 1/2" rebar just below the bituminous. The top of the bar was approximately 1.2 feet Northwest of the bottom. No exact location for the bar could be determined. No survey measurements were made to determine the position of the intersection of the quarter lines.

RJO/4967STMT

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 8, Township 102N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/04/1993 (DATE) found a 5/8" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11/04/1993 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

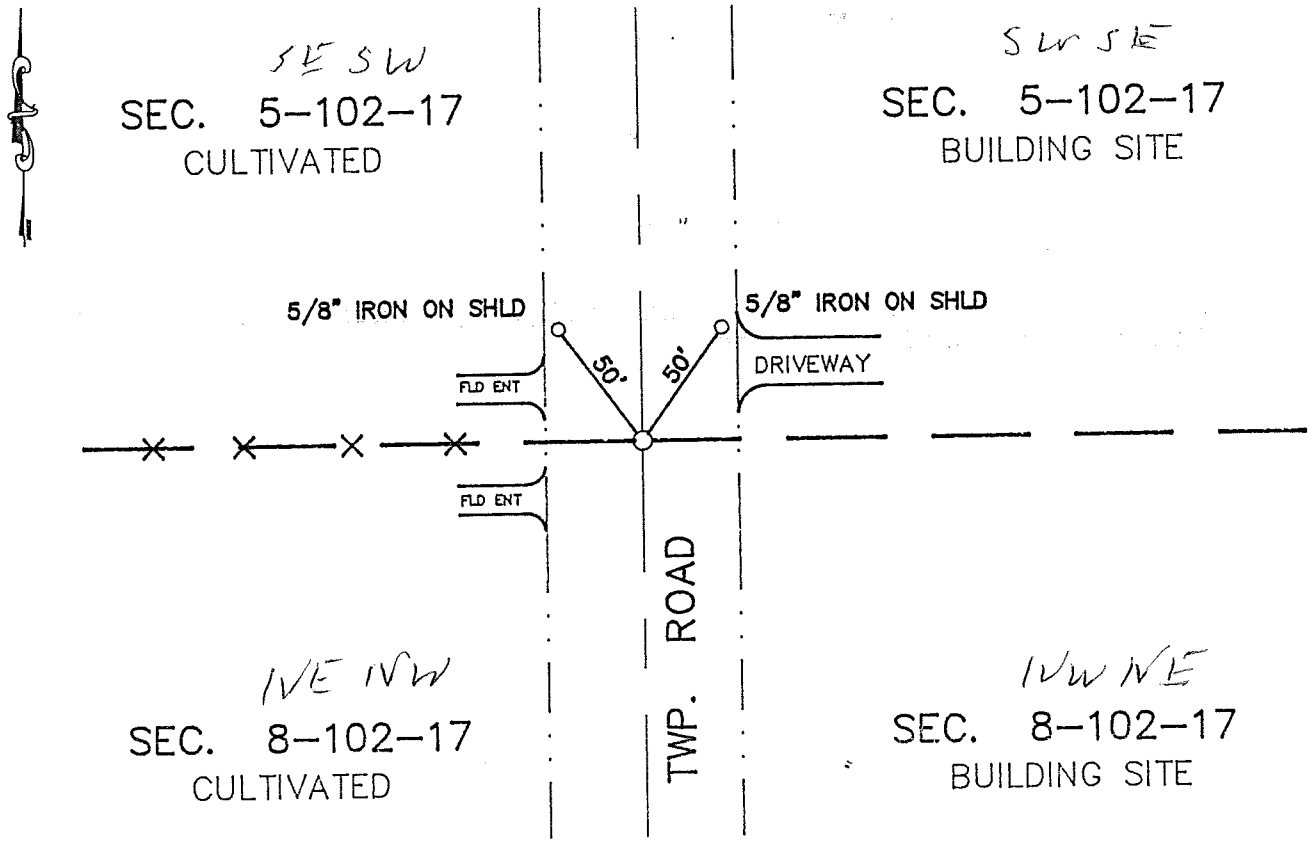

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-9-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER 446234

County of Mower

I hereby certify that this document was filed in the County Rec. office at 1 P .M. on the 10 day of July A.D., 1996

COUNTY RECORDER Charles Engen

By Cheryl A Taylor, Deputy

DOCUMENT NO. 446234

M.H.D. FORM NO. 2105

Book 91 Page 490

N 1/4 Cor SEC 8-102-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1993 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road N-S and in line with line fence west. Found a 5/8" iron at the road surface. Continued digging and found no other evidence of original PLS corner. Placed a cast iron monument inplace of 5/8" found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

BOOK 91 PAGE 491

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 9, Township 102N Range 17W, 5th P

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 12/14/1998 (DATE) found a IRON PIN

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12/14/1998 (DATE) placed a –

SKETCH OF REFERENCE TIES

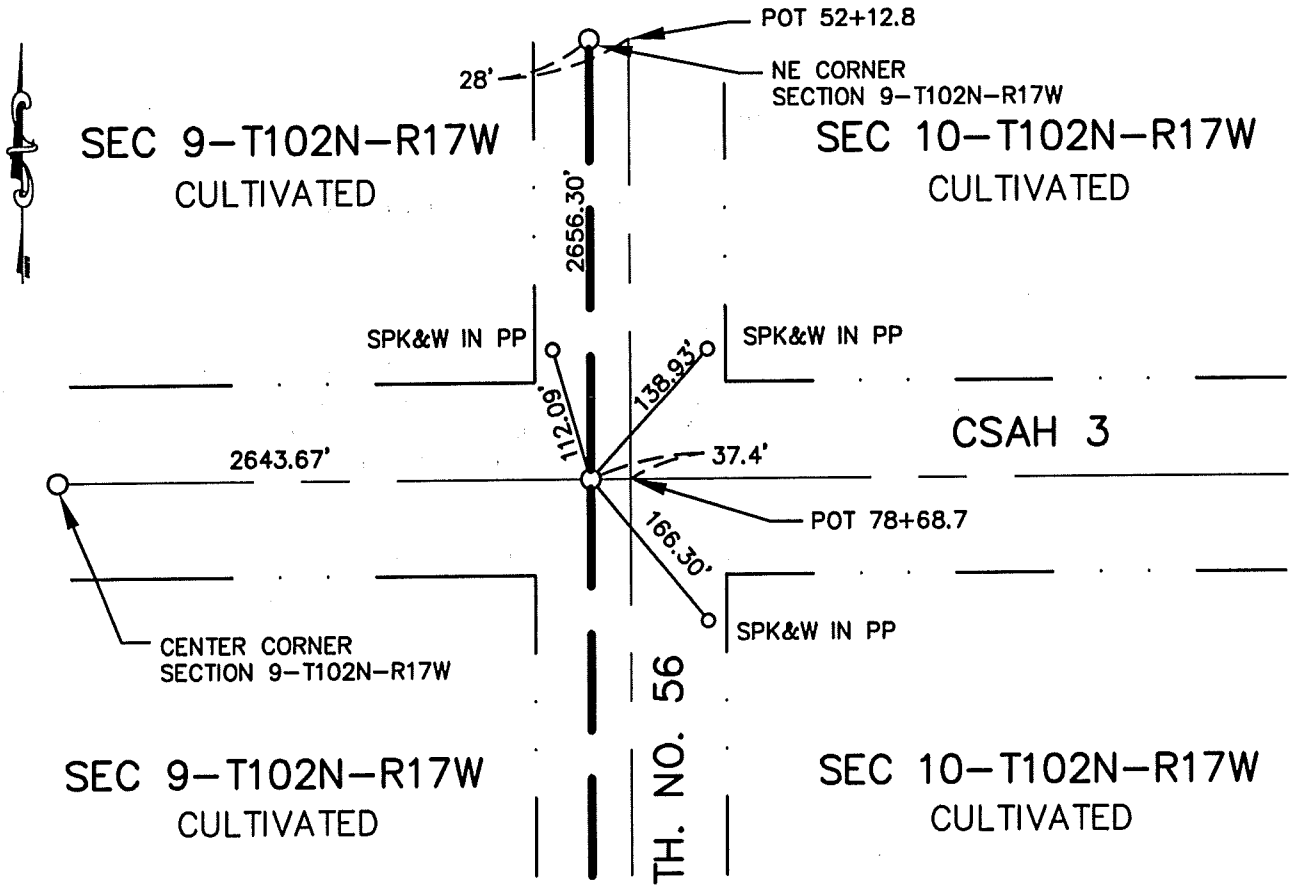

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 1-5-99 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

E 1/4 Cor Sec 9-102-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Minnesota Highway Department
Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower County CSAH No. 3 R/W map shows a location for this corner.

Minnesota Highway Department T.H. No. 56 R/W map shows this corner is 37.4' right of station 78+68.7.

1989 Jones Haugh and Smith crew set corner using CSAH No. 3 road plans.

1998 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at 37.4' west of centerline intersection of T.H. No. 56 N-S and CSAH No. 3 E-W. Located an iron pin on the centerline of CSAH No, 3 which is in agreement with 1989 location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CENTER Corner of Section 9 ,Township 102N Range 17W , 5th P

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 12/14/1998 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12/14/1998 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

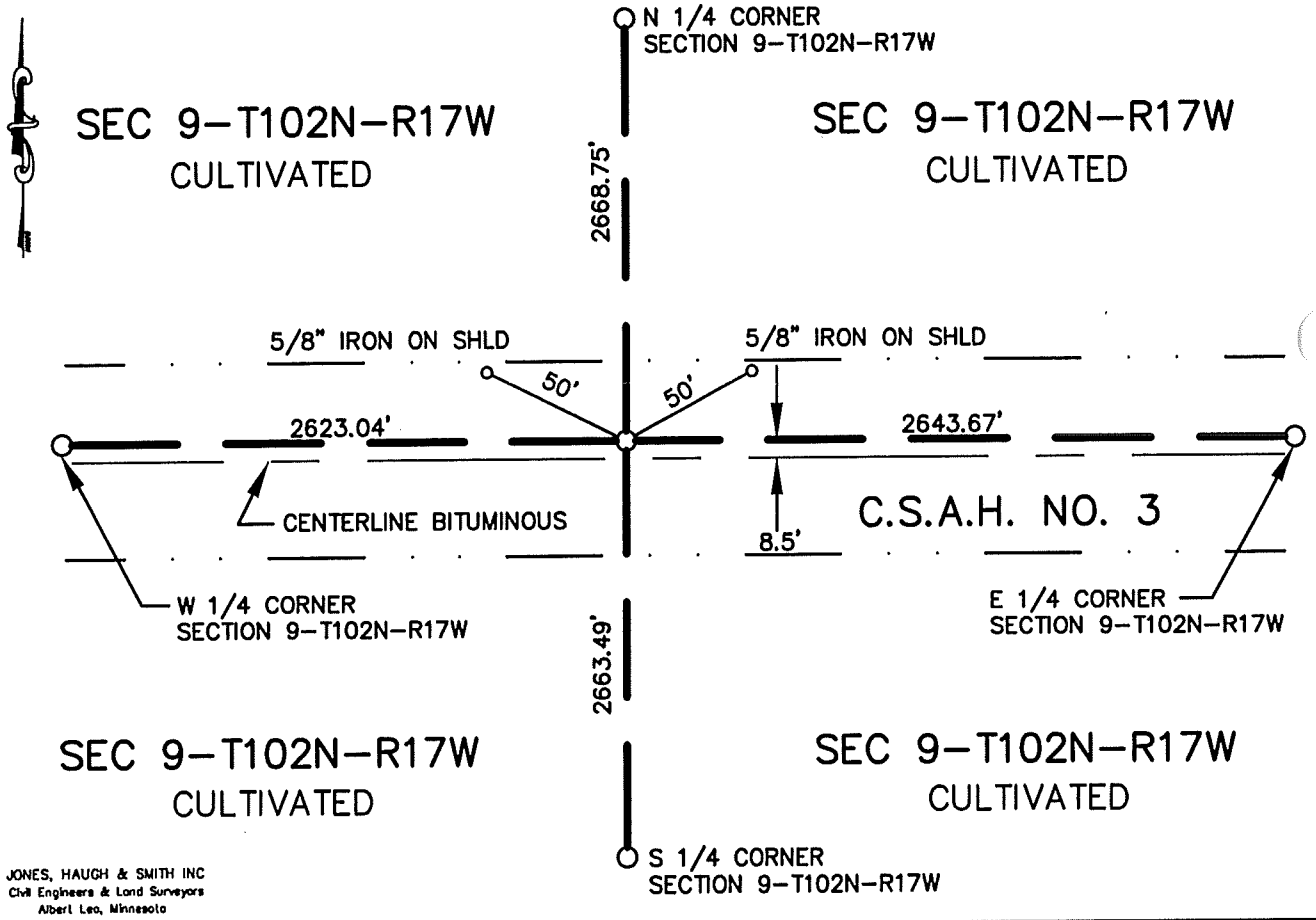

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] 1-5-99
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____ , Deputy

DOCUMENT NO. _____

M.L.R. FORM NO. 2105

Center Sec 9-102-17

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1998 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, placed a cast iron monument 2.5' east of fence lines N-S and 8.5' north of centerline at intersection of straight line between the N 1/4 corner to the S 1/4 corner and the E 1/4 corner to the W 1/4 corner.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 9 ,Township 102N Range 17W , 5th P.M

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 12/14/1998 (DATE) found a ALUMINUM MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12/14/1998 (DATE) placed a –

SKETCH OF REFERENCE TIES

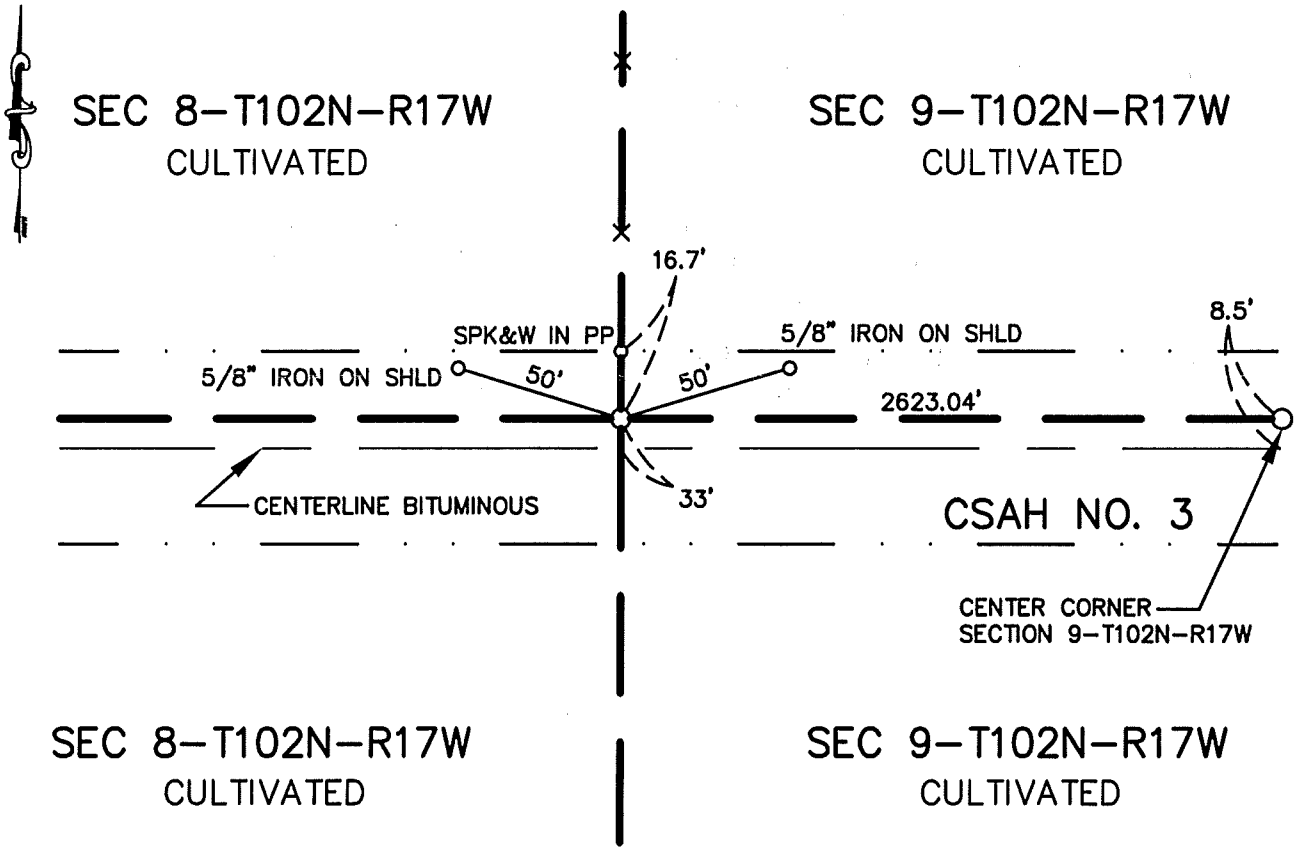

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 1-5-99
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____ , Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

W 1/4 Cor Sec 9-102-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1972 Jones Haugh and Smith crew located corner using Mower County ties.

1989 Jones Haugh and Smith crew located corner using Mower County Highway Department road plans.

1998 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand 33' north of centerline of CSAH No. 3 and in line with line fence north. Located an aluminum monument.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

P.23 "F"

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 11, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-23-88 (DATE) found a 3/4"Ø IRON CAST IN A CONC. MONUMENT 2' BELOW ROAD SURFACE.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-23-88 (DATE) placed a 5/8" IRON CAPPED RLS 13807 OVER CONCRETE MONMENT.

SKETCH OF REFERENCE TIES

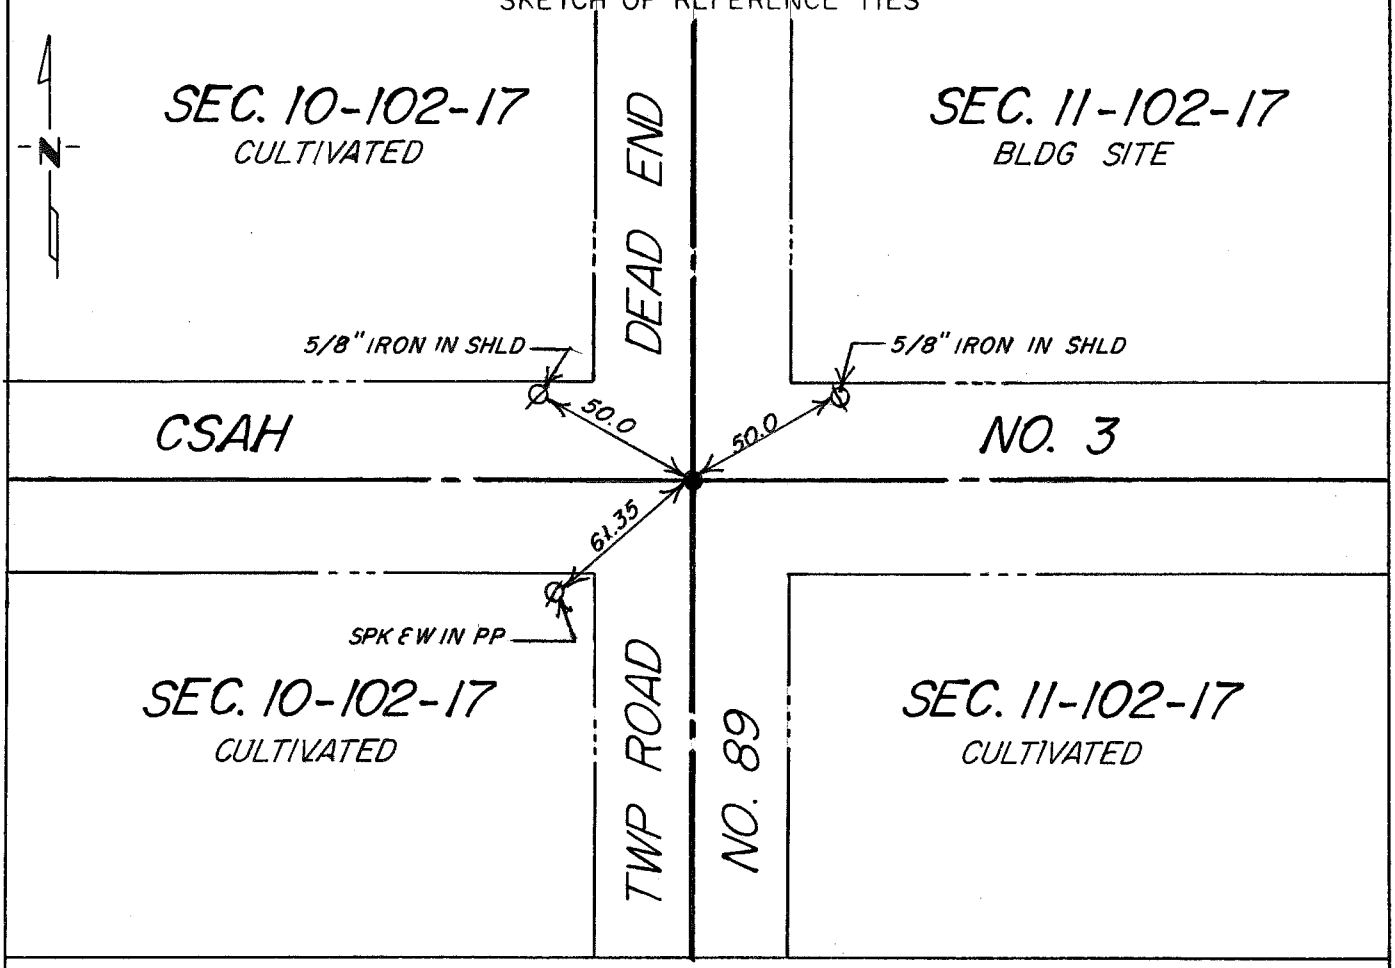

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] III
SIGNATURE

12-22-89
DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
W¼ corner Section 11-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the United States General Land Office in 1854. The government notes show this corner was marked with a charred stake together with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Records Office

1930± Mower County grading plan shows a concrete monument at ¼ corner.

1989 Jones Haugh & Smith Inc. personnel together with the Mower County backhoe operator dug on the centerline centerline of N-S-E-W roads and uncovered a 3/4" diameter iron cast in a 6" diameter concrete monument 2' below road surface. Placed a capped 5/8"Ø x 16" iron RLS 13807 over concrete monument.

The monument found fits occupation and road centerlines within the section and agrees with past records from the Mower County Highway Department.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 12, Township 102N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 10-11-85 (DATE) found a concrete monument 1.7' deep.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-11-85 (DATE) placed a cast iron monument on road surface over monument found.

SKETCH OF REFERENCE TIES

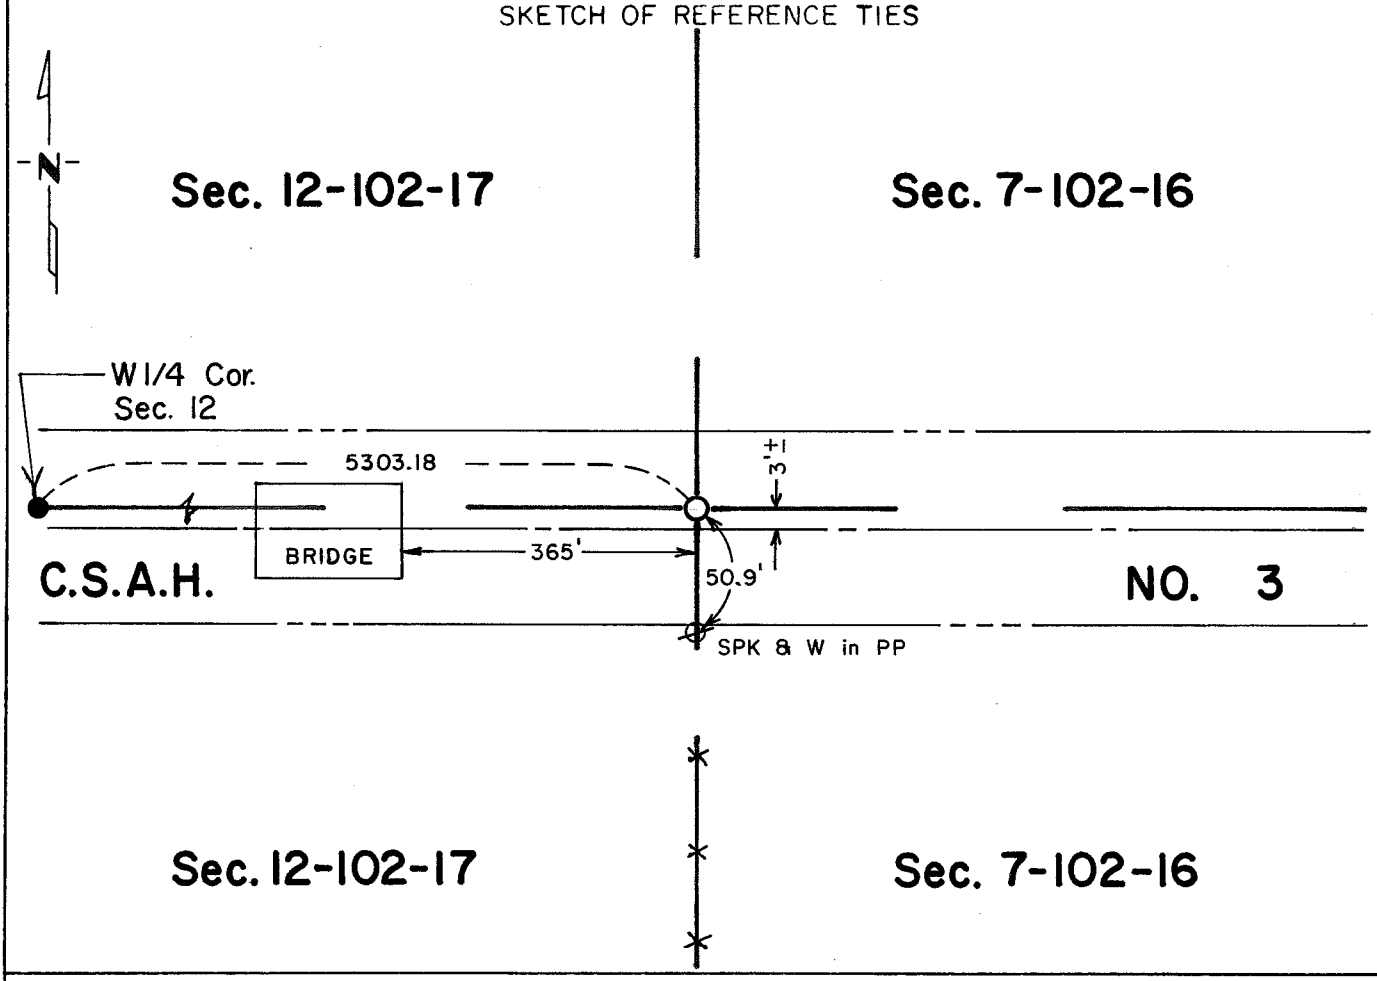

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-23-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Sec 12-102-17

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a wood post and the following ties were taken:

10" Burr Oak	S 1/2° E	500 links (330.0')
10" Burr Oak	N 1° E	706 links (465.96')

The following were contacted for section corner information:
Mower County Engineering Department
Mower County Recorder's Office

1954 The County Engineer's Book "A" shows a concrete monument inplace in accordance with Mower County Road Plan and ties.

1985 Jones, Haugh & Smith crew found a concrete monument 1.7 feet deep. Placed a cast iron monument on road surface over monument found.

Corner found fits occupation fence lines south and agrees with past records. Therefore accepted corner as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 12, Township 102N, Range 17 W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 10-11-85 (DATE) found a concrete monument 1.7' deep.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-11-85 (DATE) placed a cast iron monument on road surface over monument found.

SKETCH OF REFERENCE TIES

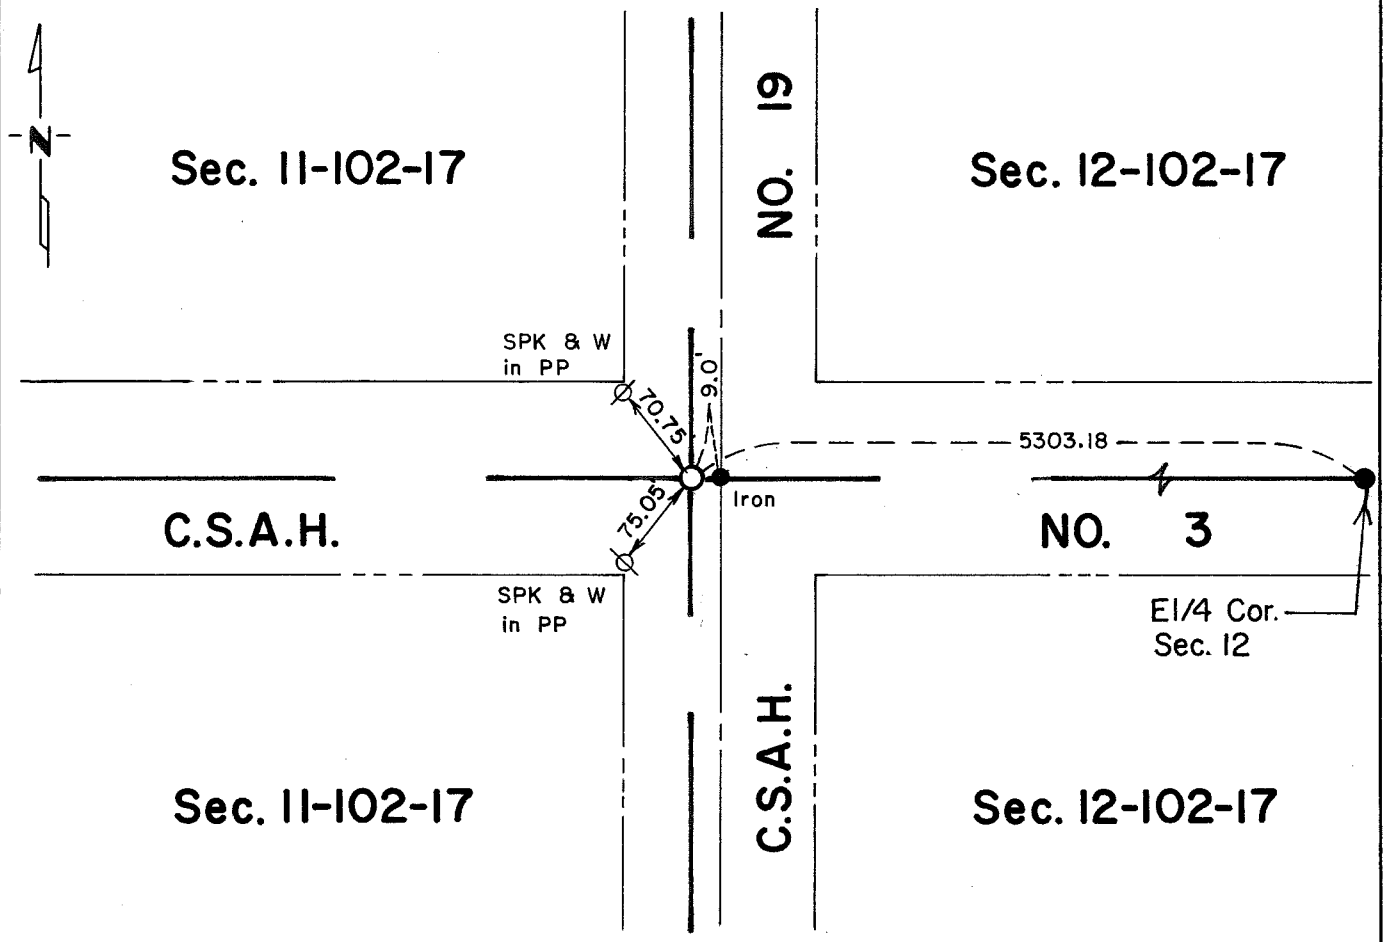

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-23-91

Registration No. 13607

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 12-102-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a wood post and a mound of earth with a trench.

The following were contacted for section corner information:
Mower County Engineering Department
Mower County Recorder's Office

1952 Book "A" of the County Engineer's Office shows an iron stake over a stone and tile inplace.

1962 North-south road PI was set 9.0 feet east of 1/4 corner.

1963 Road plan concrete monument.

1985 Jones, Haugh & Smith crew found concrete monument 1.7 feet deep. Placed a concrete monument on centerline of north-south road surface over monument found.

Corner found fits east-west road centerline and agrees with past records. Therefore accepted corner as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

"P" TIE BOOK. P23 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 15, Township 102N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 10-7-85 (DATE) found a 8"x10"x16" pointed field stone with remains of wood post

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-7-85 (DATE) placed a 5/8"ϕx24" iron on north side of stone and 5/8 ϕ x 24" iron over stone on road surface.

SKETCH OF REFERENCE TIES

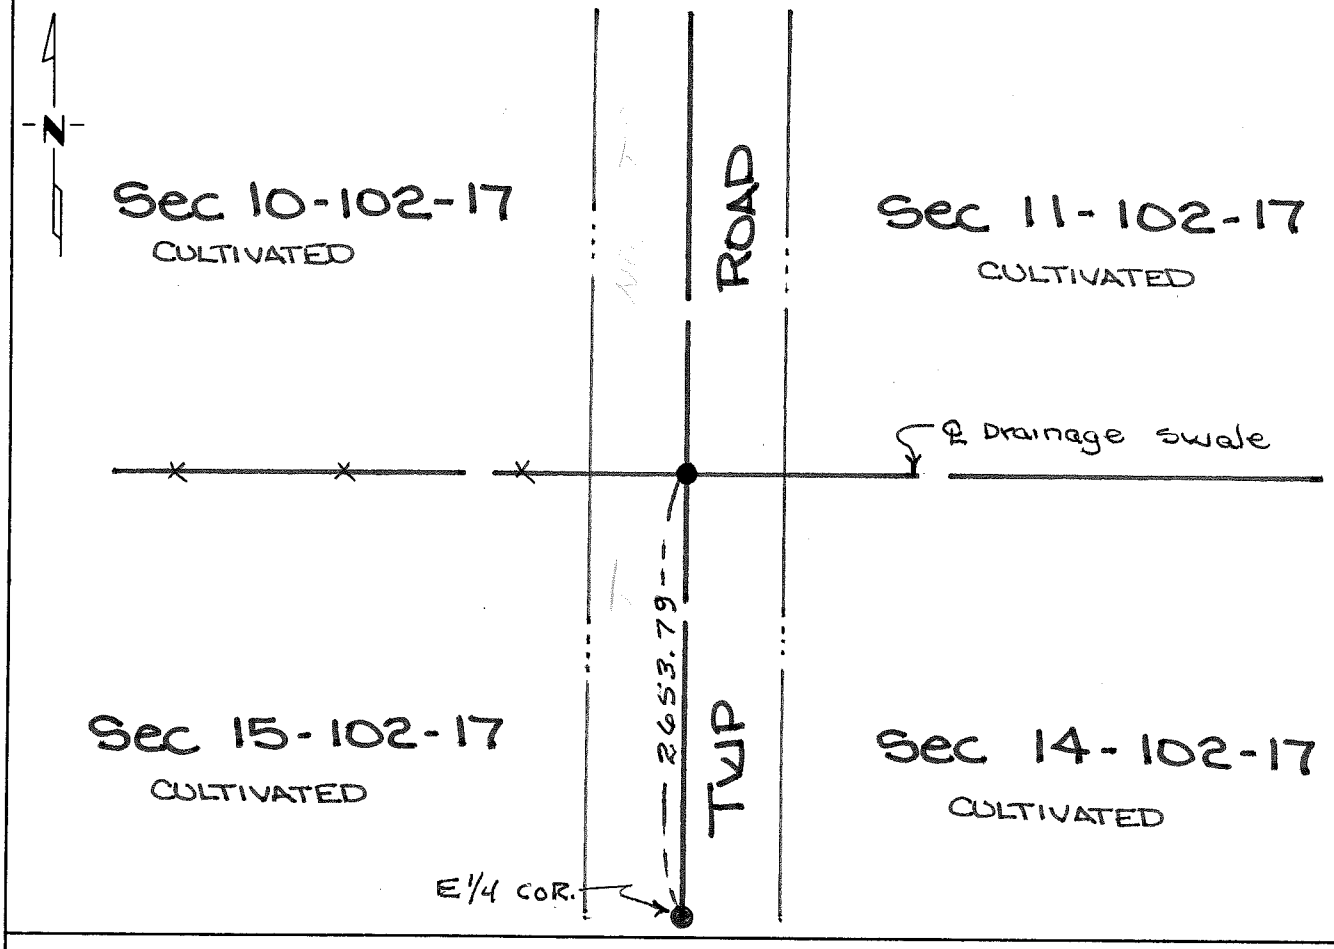

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] ☒ 10-10-85
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE cor Section 15-102-17

1854 William I. Anderson, Deputy Surveyor, set wood post during public land survey.

1899 M.N. Clausen, Registered Land Surveyor, found government post during private survey.

1985 Jones, Haugh & Smith Inc crew dug with backhoe at intersection of centerline of township road and fence line west at 2.5 feet below road surface. Uncovered a 8" x 10" x 16" long pointed field stone with the remains of an old wooden post. Placed 5/8"ø x 24" iron on north side of stone and a 5/8"ø x 24" iron over stone on road surface.

Corner found fits occupation and road centerline and was accepted as a perpetuation of the public land survey corner.

TIE BOOK P. 23

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 15, Township 102N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 10-7-85 (DATE) found a 10"x12"x20" pointed field stone with remains of wood post on north side of stone

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-7-85 (DATE) placed a 5/8"ϕx24" iron in remains of wood post

SKETCH OF REFERENCE TIES

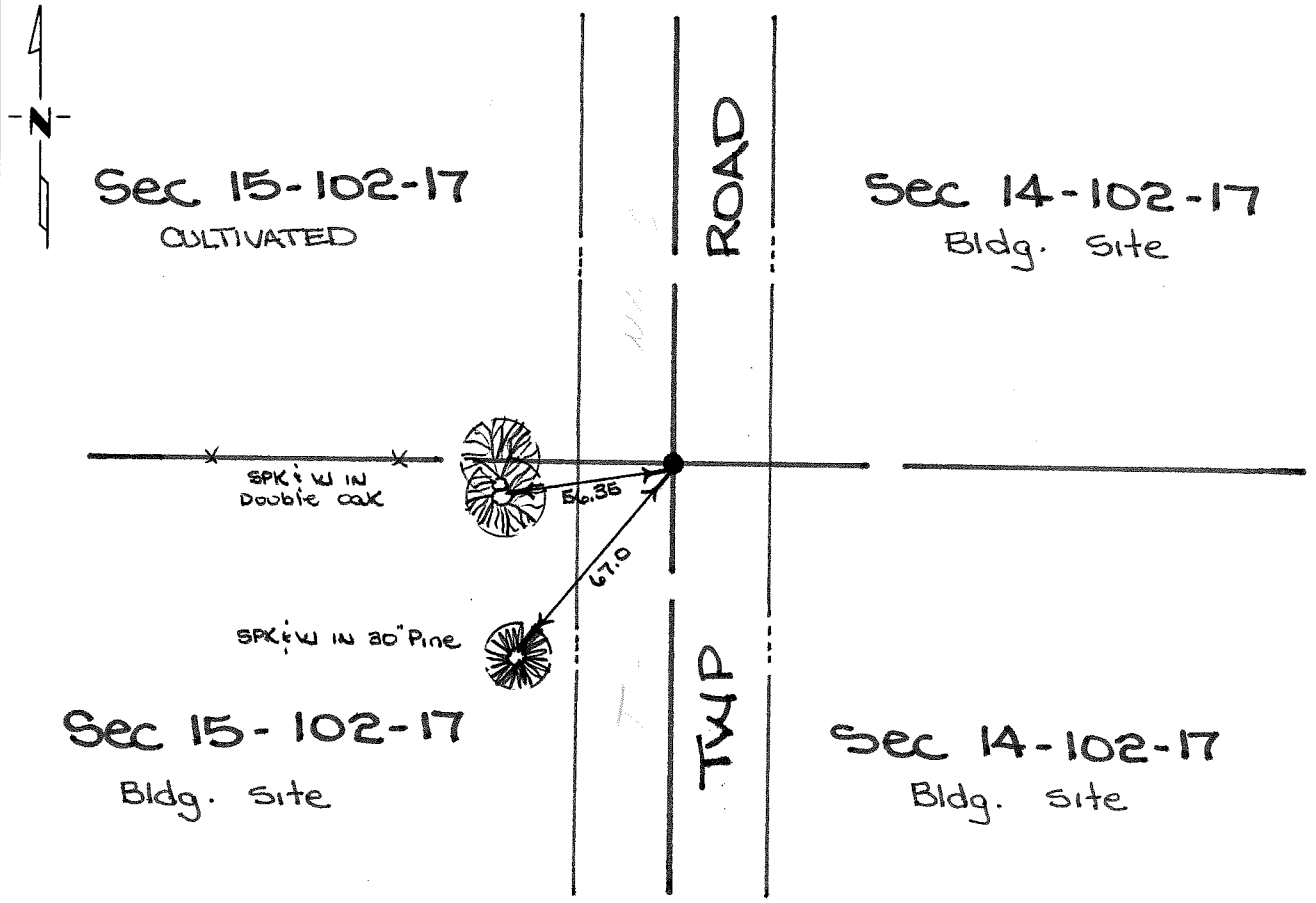

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

H. [illegible] III
SIGNATURE

10-10-85
DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

$E\frac{1}{4}$ corner Section 15-102-17

1854 William I. Anderson, Deputy Surveyor, set wood post during public land survey.

1888 M.N. Clausen, Registered Land Surveyor, found government post during private land survey.

1985 Jones, Haugh & Smith Inc crew dug with backhoe at intersection of centerline township road and fence line west at a depth of 1.5 feet below road surface. Found a large 10" x 12" x 20" pointed stone with remains of wood post on north side of stone. Drive a 5/8"ø x 24" iron into wood post 0.5 feet below road surface.

Corner found fits occupation and road centerline and was accepted as a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 16, Township 102N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 04/01/1996 (DATE) found a 5/8" IRON CAP NO. 13807

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 04/01/1996 (DATE) placed a – CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

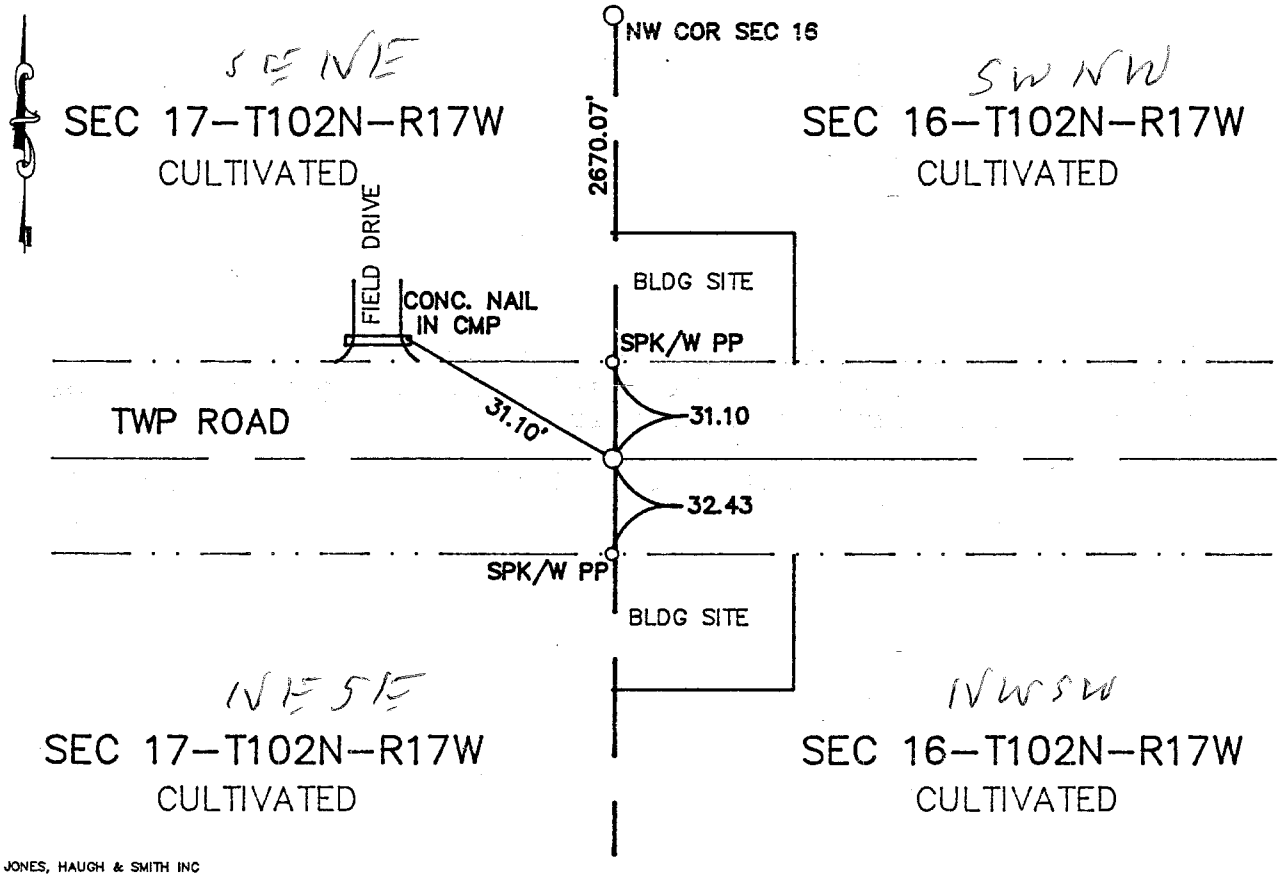

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-9-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower 446235

I hereby certify that this document was filed in the County Rec. office at 1 P .M. on the 10th day of July A.D., 1996

COUNTY RECORDER Charles Enger

By Cheryl Schuler, Deputy

DOCUMENT NO. 446235

M.H.D. FORM NO. 2105

Book 91 Page 492 BOOK 91 PAGE 492

W 1/4 Cor SEC 16-102-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL of township road E-W. Found a 5/8" iron capped #13807. Placed a cast iron monument at surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 16, Township 102N Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 04/01/1996 (DATE) found a 6" BROKEN WOOD POST

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 04/01/1996 (DATE) placed a CAST IRON MONUMENT ON EAST SIDE POST

SKETCH OF REFERENCE TIES

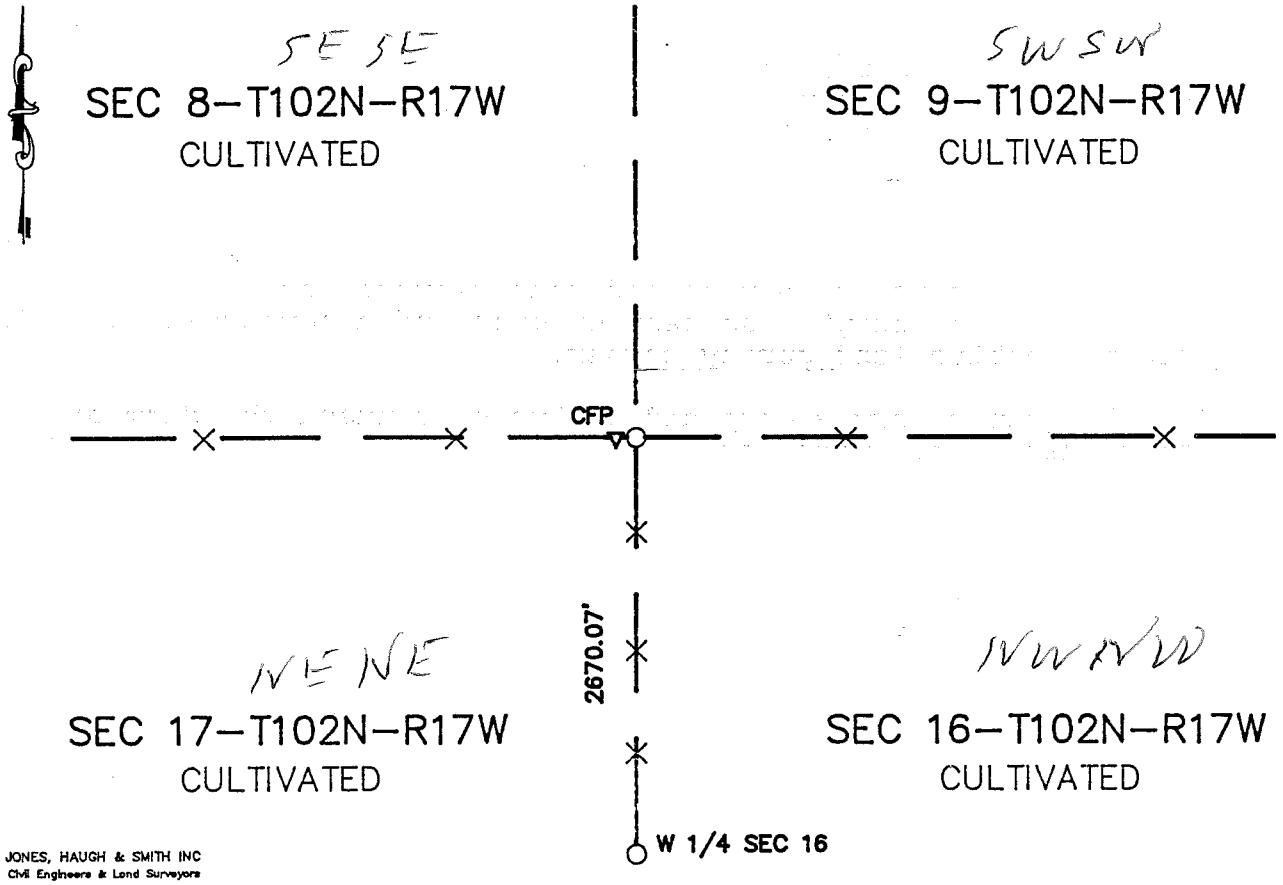

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-9-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower 446236

I hereby certify that this document was filed in the County Rec. office at 1 P.M. on the 10th day of July A.D., 1996

COUNTY RECORDER Charles Engel

By Arlene A. Taylor, Deputy

DOCUMENT NO. 0446236

M.H.D. FORM NO. 2105

Book 91 Page 494

BOOK 91 PAGE 494

NW Cor SEC 16-102-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, set the NW corner in line with line fence E-W and line fence south. Placed cast iron monument on east side of 6" broken wood corner post.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

BOOK 91 PAGE 495

Index No. P20 "D"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 17, Township 102N, Range 17 W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 7-13-87 (DATE) found a sq. headed bolt 3' long 1' below road surface.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 7-13-87 (DATE) placed a cast iron monument on road surface over bolt found.

SKETCH OF REFERENCE TIES

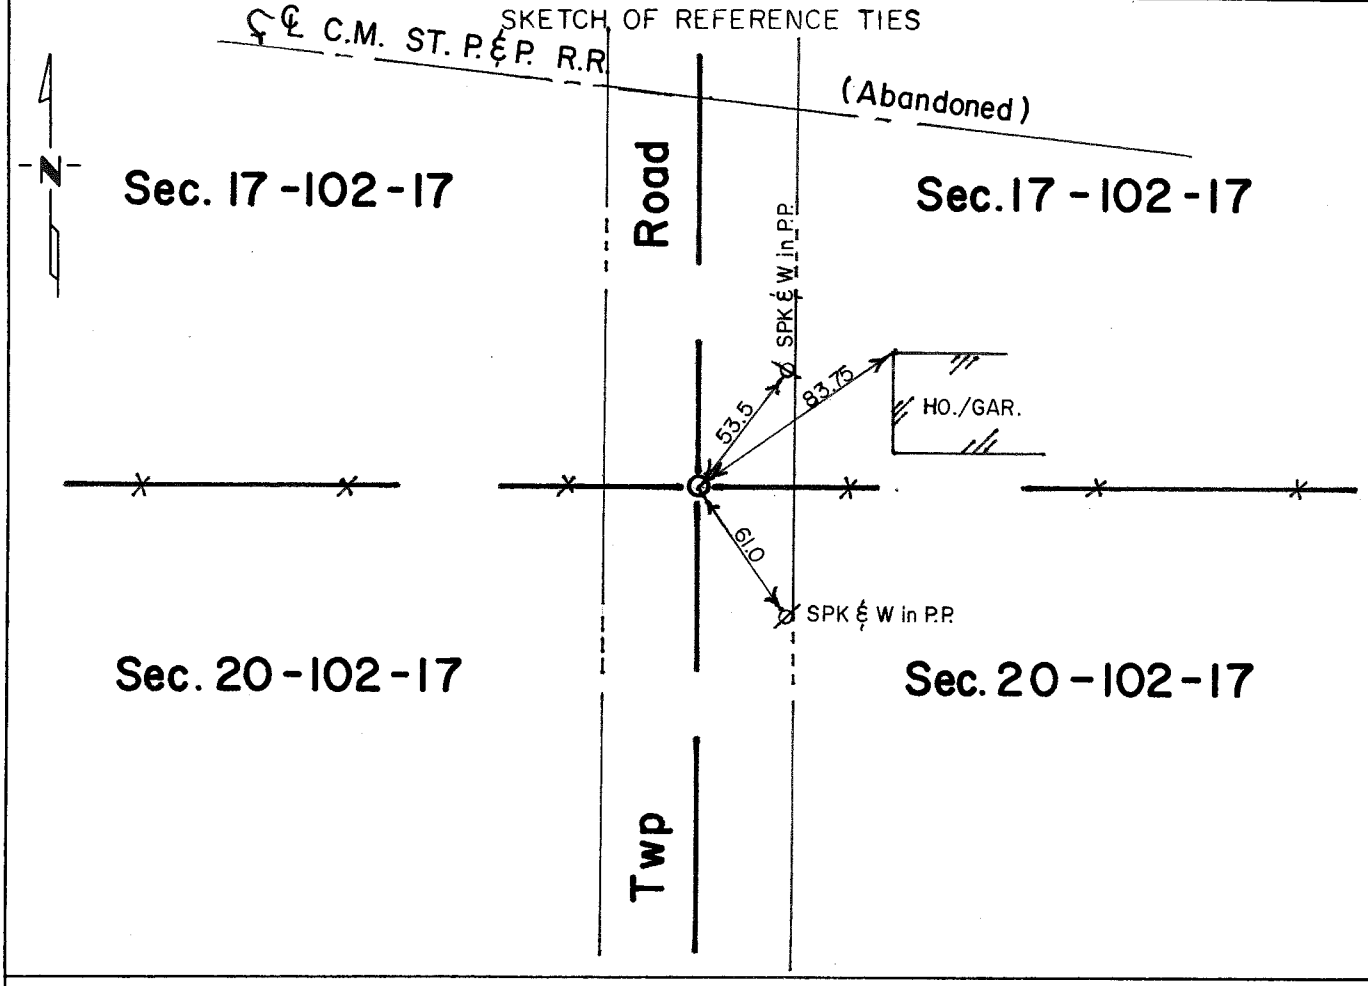

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-12-88 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
S¼ corner Section 17-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the US General Land Office in 1854. The government notes show this corner was marked with a wood post and the following bearing trees were marked:

9" Burr Oak	S 19½° W	371 Links
12" Burr Oak	N 50° W	290 Links

The following were contacted for section corner information:

Mower County Engineering Department

1987 Jones, Haugh & Smith crew dug with the Mower County backhoe on the centerline of north-south road in line with fence east and west and uncovered a three foot long square headed bolt one foot below road surface. Continued digging and uncovered no further evidence of public land survey corner. Accepted bolt as best evidence of perpetuation of public land survey corner and set a cast iron monument.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith

Index No. P20 "N"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 18, Township 102N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 7-13-87 (DATE) found a corner fence post at 3-way fence intersection.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 7-13-87 (DATE) placed a cast iron monument on west side of corner fence post found.

SKETCH OF REFERENCE TIES

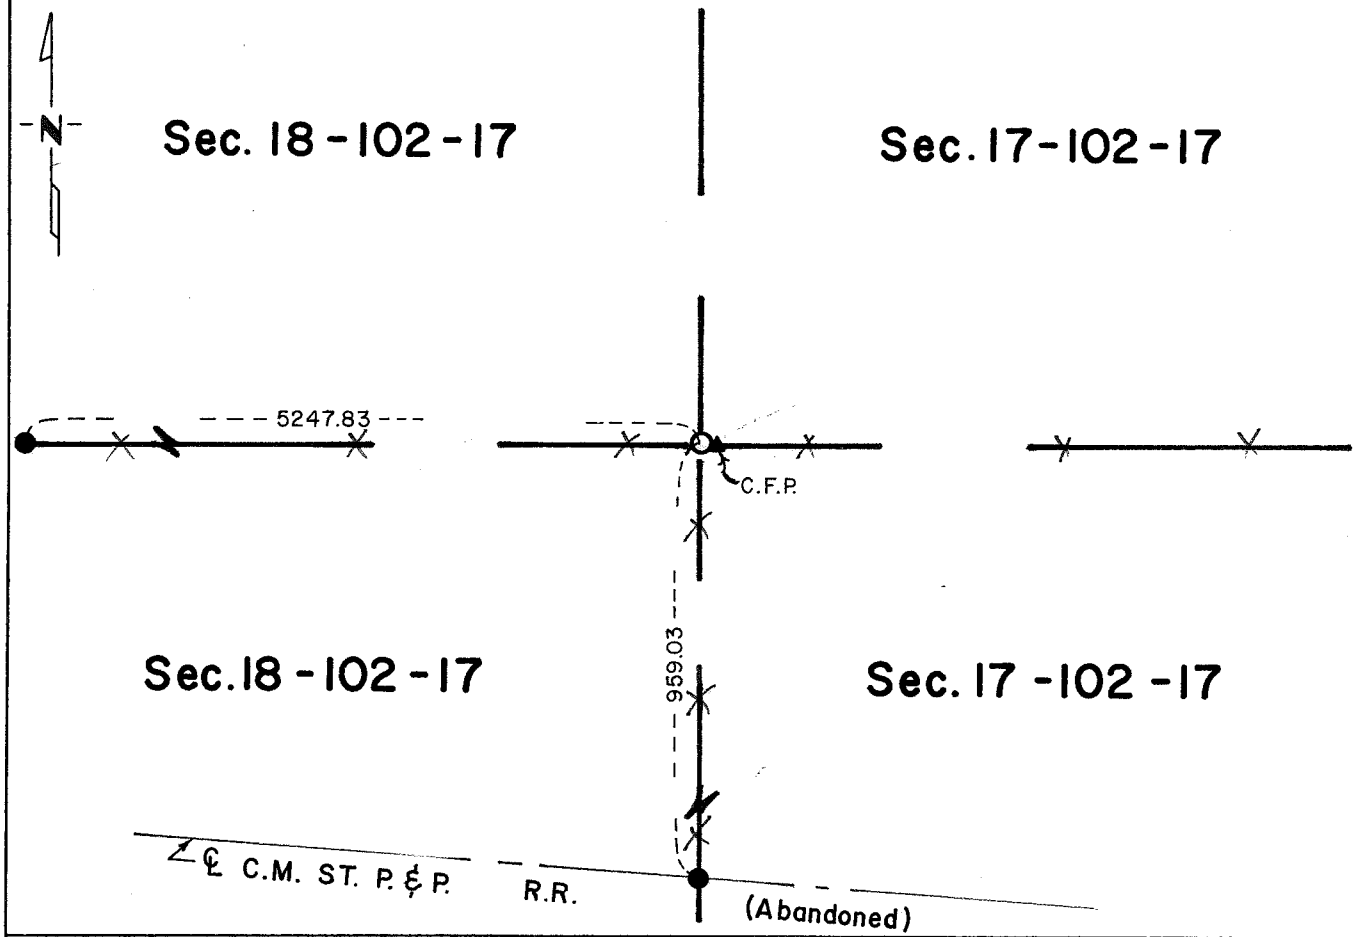

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-12-88 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
$E\frac{1}{4}$ corner Section 18-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the US General Land Office in 1854. The government notes show this corner was marked with a wood post and the following bearing trees were marked:

12" Burr Oak	S 30^{o} W	30 Links
13" Burr Oak	N 48^{o} E	65 Links

The following were contacted for section corner information:

Mower County Engineering Department

1978 Jones, Haugh & Smith crew during private survey found a corner fence post in a 3-way fence intersection and accepted as best evidence.

1987 Jones, Haugh & Smith crew found a corner fence post at a 3-way fence intersection which agrees with 1978 records. Placed a cast iron monument on west side of corner fence post.

This position is accepted as best evidence of a perpetuation of public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith

Index No. P20 "M"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 18, Township 102N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 7-13-87 (DATE) found a 3/4" ø iron in line with fences north and east.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 7-13-87 (DATE) placed a cast iron monument on road surface over iron found.

SKETCH OF REFERENCE TIES

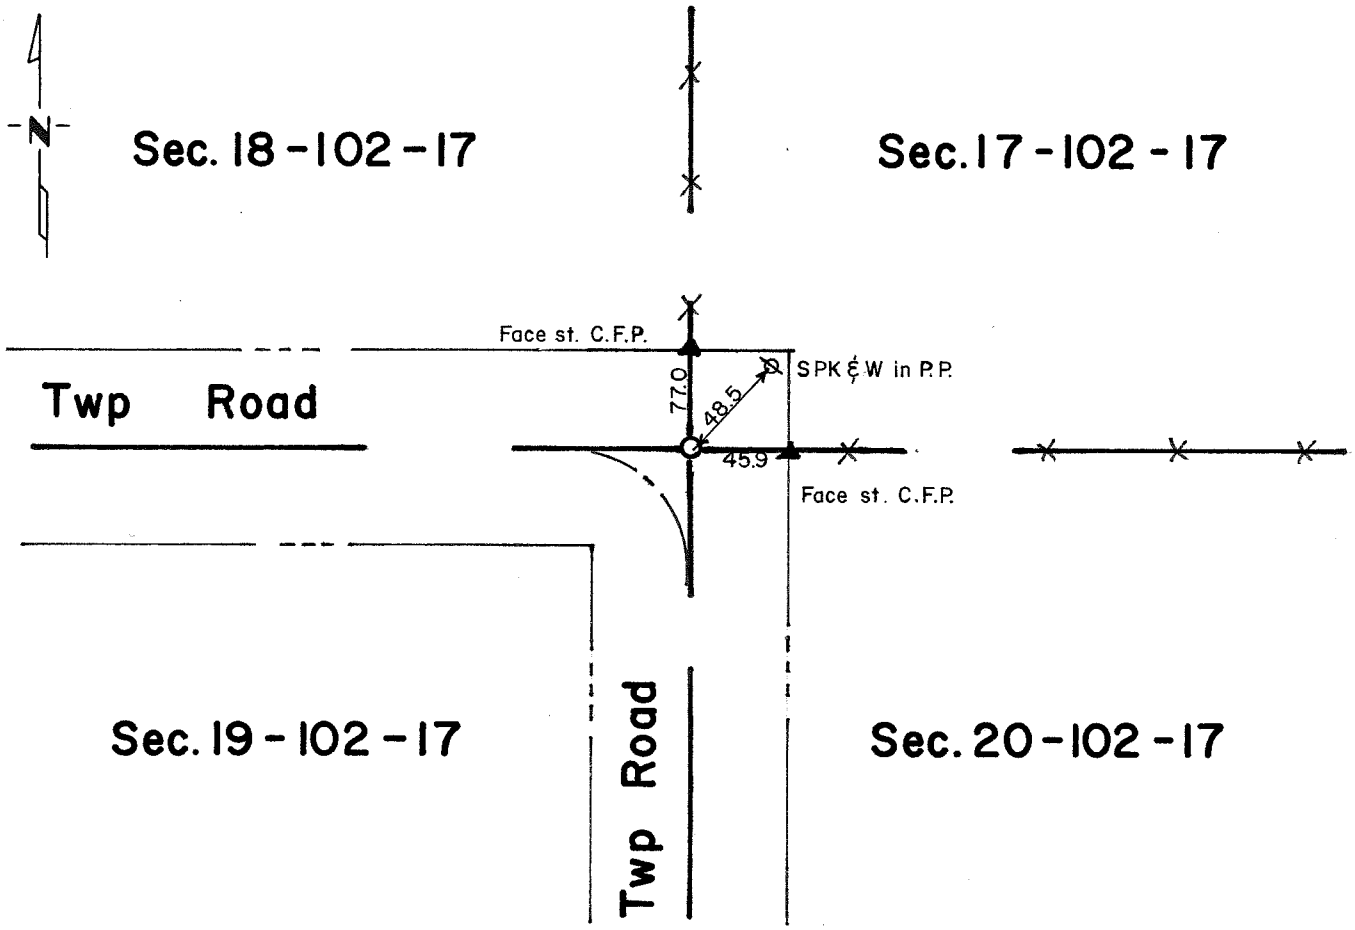

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-12-88 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
SE corner Section 18-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the US General Land Office in 1854. The government notes show this corner was marked with a wood post and the following bearing trees were marked:

10" Burr Oak	S 72° W	70 Links
9" Burr Oak	N 53° W	385 Links
16" Burr Oak	N 4° E	395 Links
17" Burr Oak	N 51° E	30 Links

The following were contacted for section corner information:

Mower County Engineering Department

No record of this corner was obtained from the Mower County Engineer Department or from the private records of Jones, Haugh & Smith Inc.

1987 Jones, Haugh & Smith crew dug with the Mower County backhoe on centerline of road tangents south and west in line with fence east and north and uncovered a 3/4" diameter iron one foot below ground surface. Continued digging and found no further evidence of public land survey corner.

The location of corner appears it would have been destroyed by township road construction. The position of iron found was in the easterly road ditch. Accepted iron found as best evidence of the original public land survey corner and set a cast iron monument.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 19, Township 102N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/11/1998 (DATE) found a 3/4"X6" IRON CAPPED 11009

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/11/1998 (DATE) placed a –

SKETCH OF REFERENCE TIES

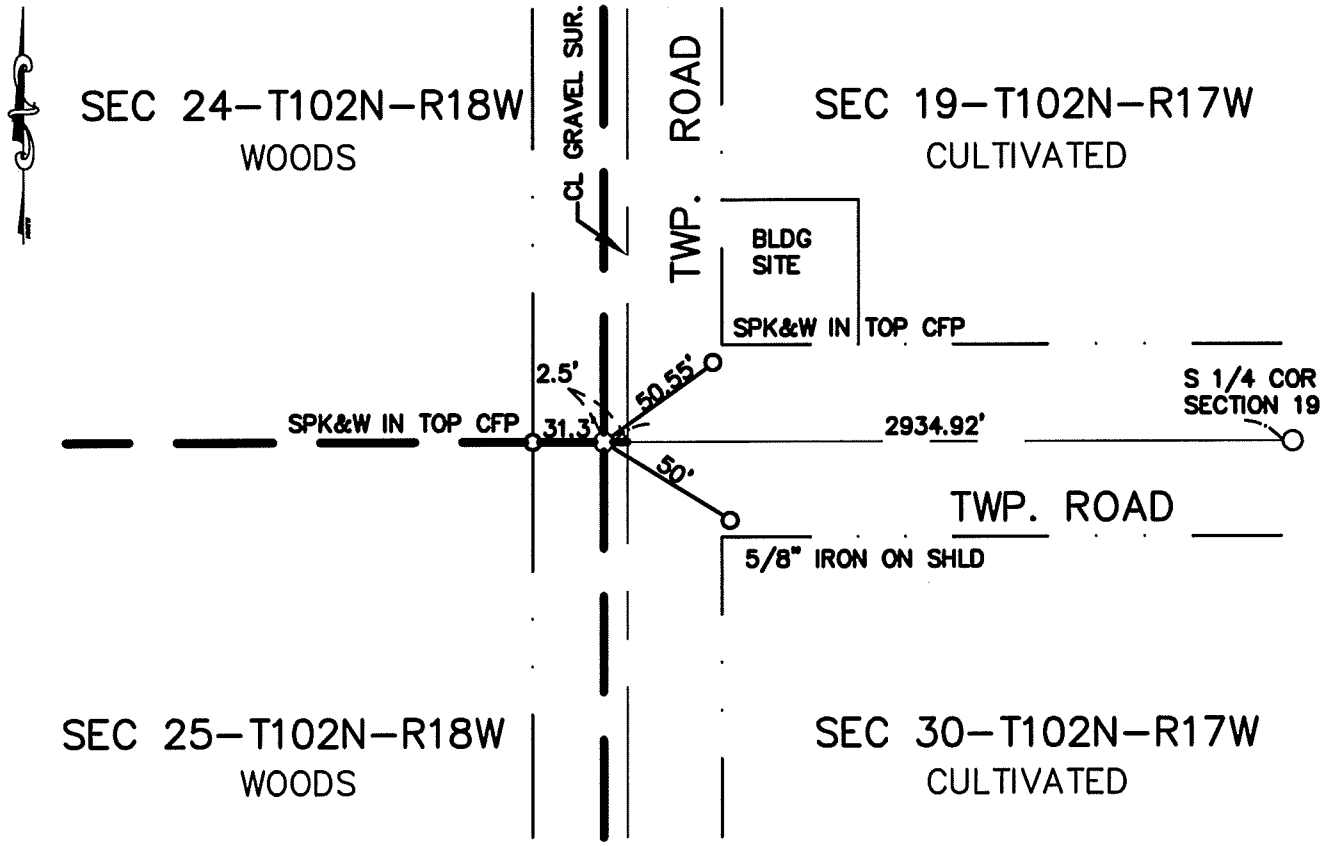

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-1-98

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SW Cor Sec 19-102-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1998 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the centerline of township road east and 2.5'+/- west of the centerline of township road N-S. Located a 3/4"x6" iron over a monument capped 11009. Left monument as found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 19, Township 102N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/06/1998 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/06/1998 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

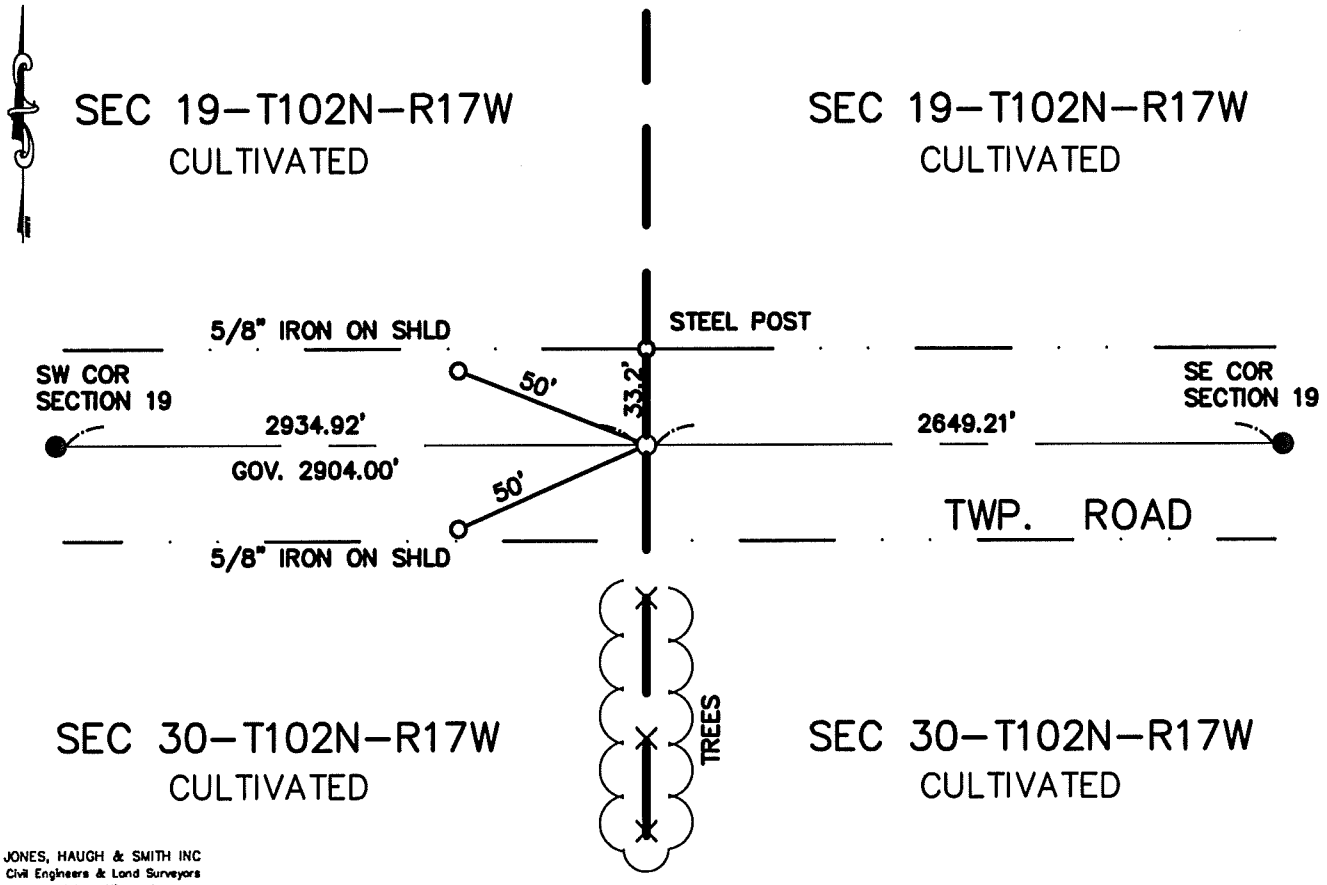

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-21-98

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

S 1/4 Cor Sec 19-102-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1998 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the Mower County backhoe at the centerline of township road E-W and in line with line fence south. Located no evidence of original PLS corner. Placed a cast iron monument on a straight line between the SE and the SW section corners. Corner is on road centerline and in line with line fence south.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. P20 "P"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 20, Township 102N, Range 17 W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 7-13-87 (DATE) found a 5/8" ø iron.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 7-13-87 (DATE) placed a cast iron monument on road surface over iron found.

SKETCH OF REFERENCE TIES

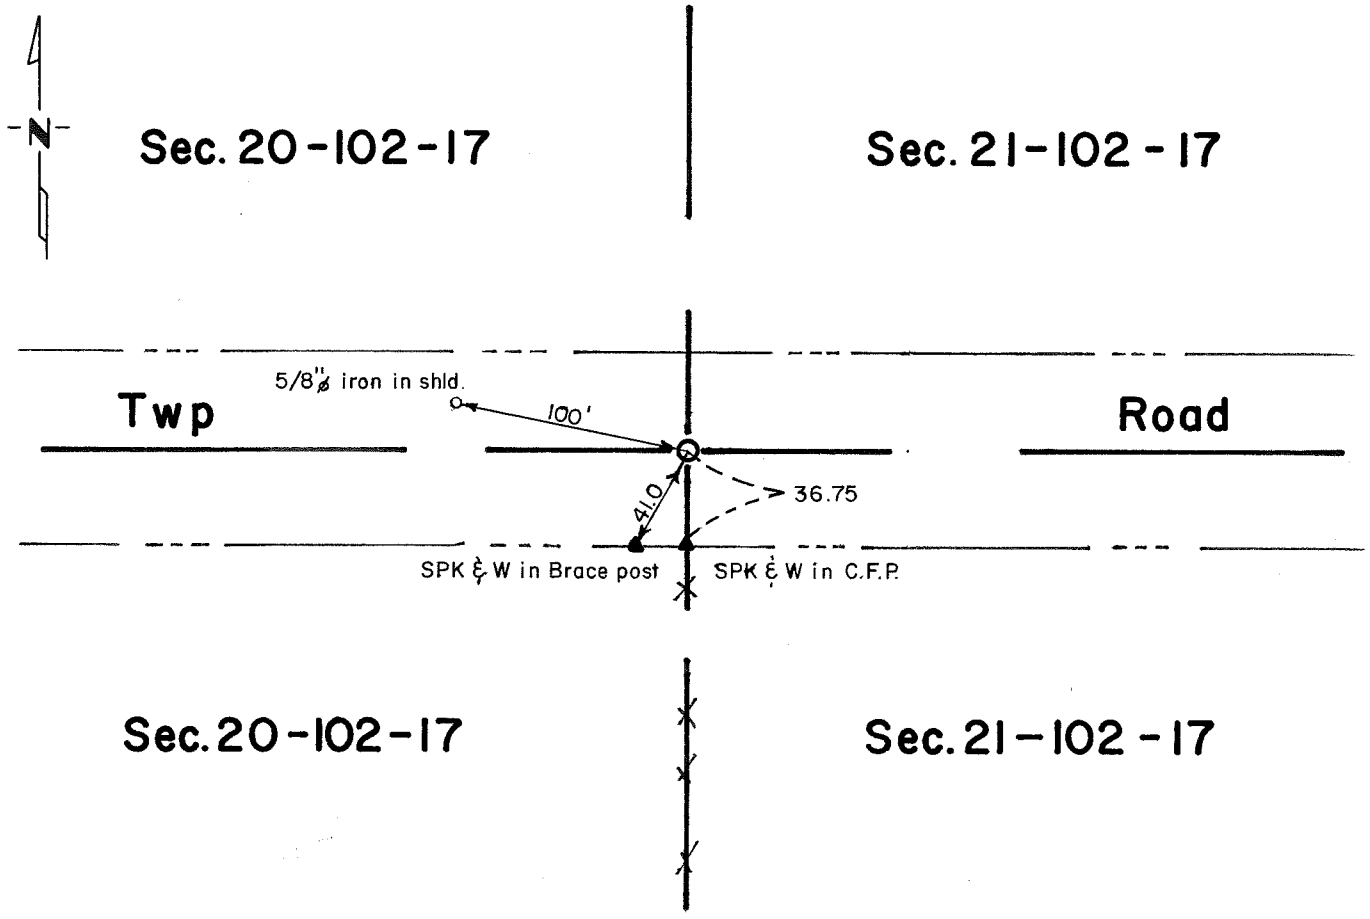

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-12-88 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
$E\frac{1}{4}$ corner Section 20-102-17

This corner was originally established by Deputy Surveyor, William I. Anderson of the US General Land Office in 1854. The government notes show this corner was marked with a wood post and the following bearing trees were marked:

14" Burr Oak N 18° W 60 Links

The following were contacted for section corner information:

Mower County Engineering Department

No record of the corner was obtained from Mower County Engineering Department or private records of Jones, Haugh & Smith Inc.

1987 Jones, Haugh & Smith crew dug with the Mower County backhoe on centerline of east-west road in line with fence south and uncovered a 5/8" diameter iron one foot below road surface. Continued digging and found no further evidence of public land survey corner. Reset 5/8" diameter iron and set cast iron monument over it on road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith

Index No. p76 11 Q' 20

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 20, Township 102N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 4-29-92 (DATE) found a ½"Ø X 30"LONG IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-29-92 (DATE) placed a =⅝"ø x 16" iron stake monument (Capped RLS 13807)

SKETCH OF REFERENCE TIES

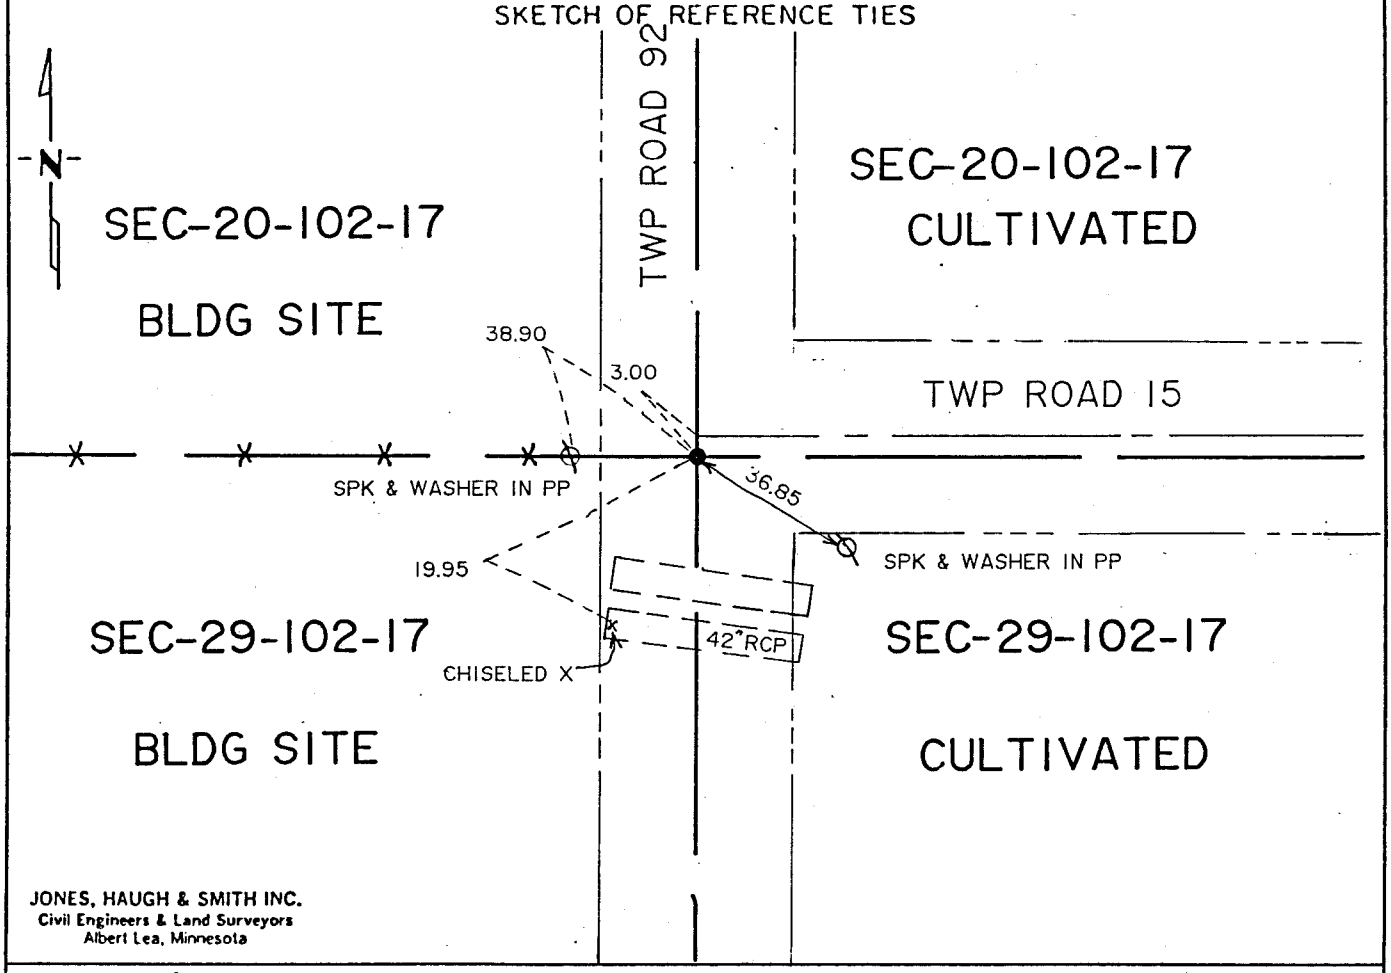

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 11-24-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Section 20-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following tie was taken:

10" Burr Oak	S 23° W	223 links (147.18 ft)
11" Burr Oak	N 75° W	215 links (141.90 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1884 Clausen's field notes indicate a government post at the S 1/4 corner.

1992 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte IV, dug with the county backhoe and uncovered a 1/2" diameter x 30" long iron, five inches deep. Continued digging and found no further evidence. Accepted iron as best evidence and set capped RLS No. 13807 iron, four inches under road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 20, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-29-92 (DATE) found a 1/2 ø x 30" long iron

☐ left monument as found, ☐ lowered monument, ☒ removed monument (explain)

☒ On 4-29-92 (DATE) placed a capped RLS 13807 5/8"ø iron at same location

SKETCH OF REFERENCE TIES

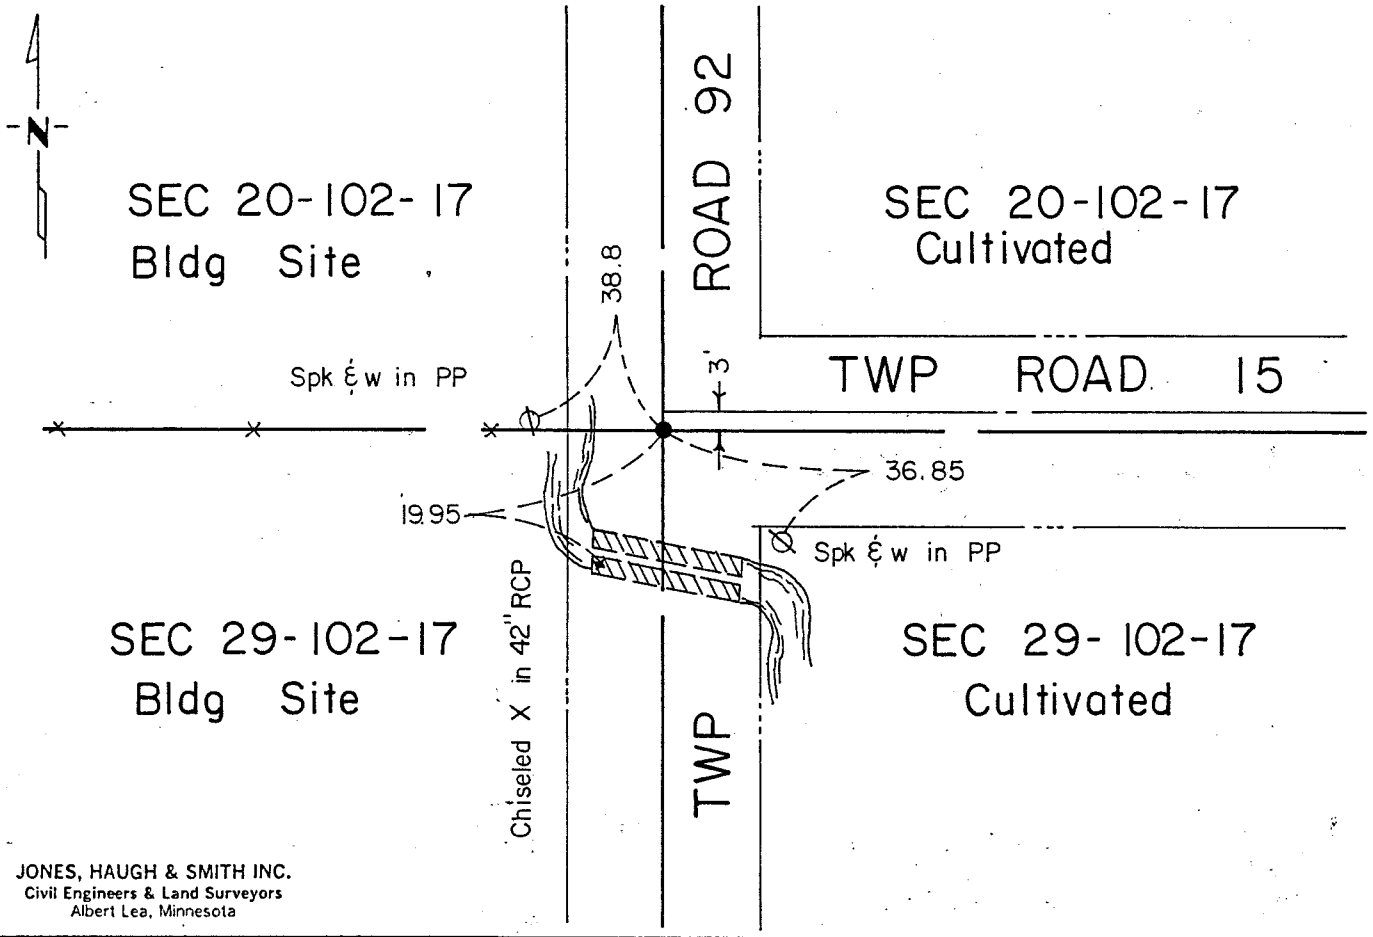

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-20-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Section 20-102-17

This corner was originally established by Deputy Surveyor Wm. I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder's Office
Ray Tucker, RLS

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1884 Clausen, County Surveyor, uncovered corner during a survey of the SE 1/4.

1992 Jones, Haugh & Smith Inc crew under the direction of John Schulte RLS, Mower County Surveyor, dug with the County backhoe and uncovered a 1/2" diameter x 30" long pipe. Dug a 5'x12'x4' deep hole and found no further evidence of public land survey corner or a perpetuation thereof. Therefore accepted 1/2" pipe as best evidence and placed a 5/8" diameter iron capped RLS 13807 at same location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 20, Township 102N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 4-30-92 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-30-92 (DATE) placed a CONCRETE NAIL WASHER

SKETCH OF REFERENCE TIES

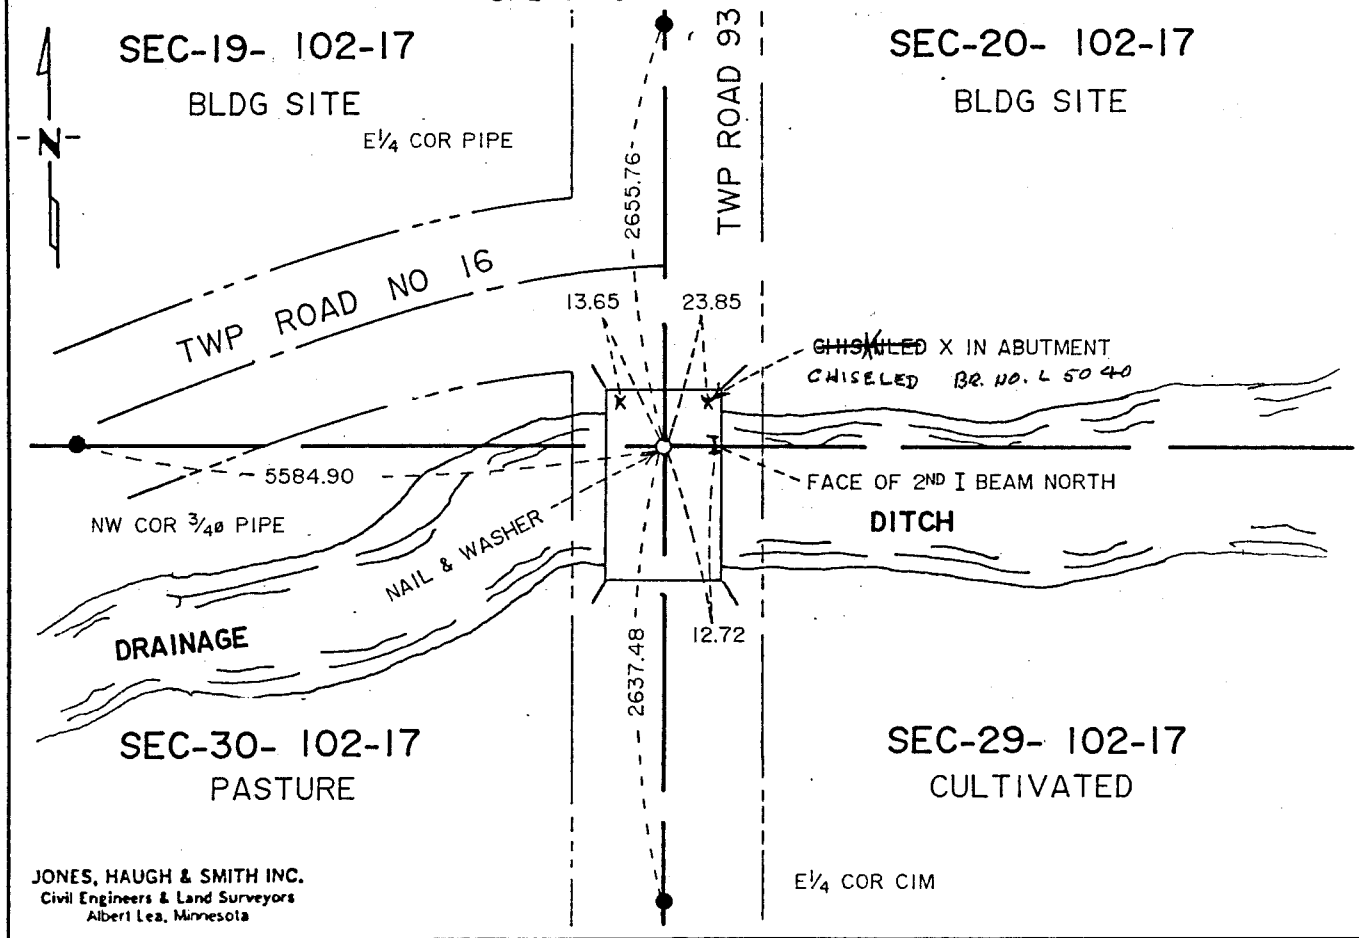

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 11-24-92 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 20-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following tie was taken:

Burr Oak	N 15° W	238 links (157.08 ft)
Burr Oak	N 55° E	174 links (114.84 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1992 Jones, Haugh & Smith Inc crew found no evidence of original public land survey corner or bearing trees. Established the corner using obliterated methods as follows: Used centerline of bridge at northeast corner to control east-west position of this corner. Measured north from E 1/4 corner of Section 30 to existing fence line west at northeast corner of the SE 1/4 NE 1/4 Section 30 and found a distance of 1318.74 feet. Doubled this distance and set temporary point on centerline of the bridge for northeast corner. Then measured north from this temporary point to field division west at northeast corner of the SE 1/4 SE 1/4 Section 19 and found distance of 1328 feet more or less. Continued measuring north to E 1/4 corner Section 19 and found 2655.76 feet. We also found the remains of old fence line east on south bank of creek which fits temporary point and the extended centerline of township road to west. Therefore we set concrete nail and washer at temporary point and took ties as shown and accepted this location as best location of the original public land survey corner using existing extrinsic evidence.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 20, Township 102N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 4-30-92 (DATE) found a FOUND 4" DIA. WHEEL HUB AND RESET

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-30-92 (DATE) placed a 5/8"ø x 16" iron stake monument (Capped RLS 13807) - Placed

SKETCH OF REFERENCE TIES

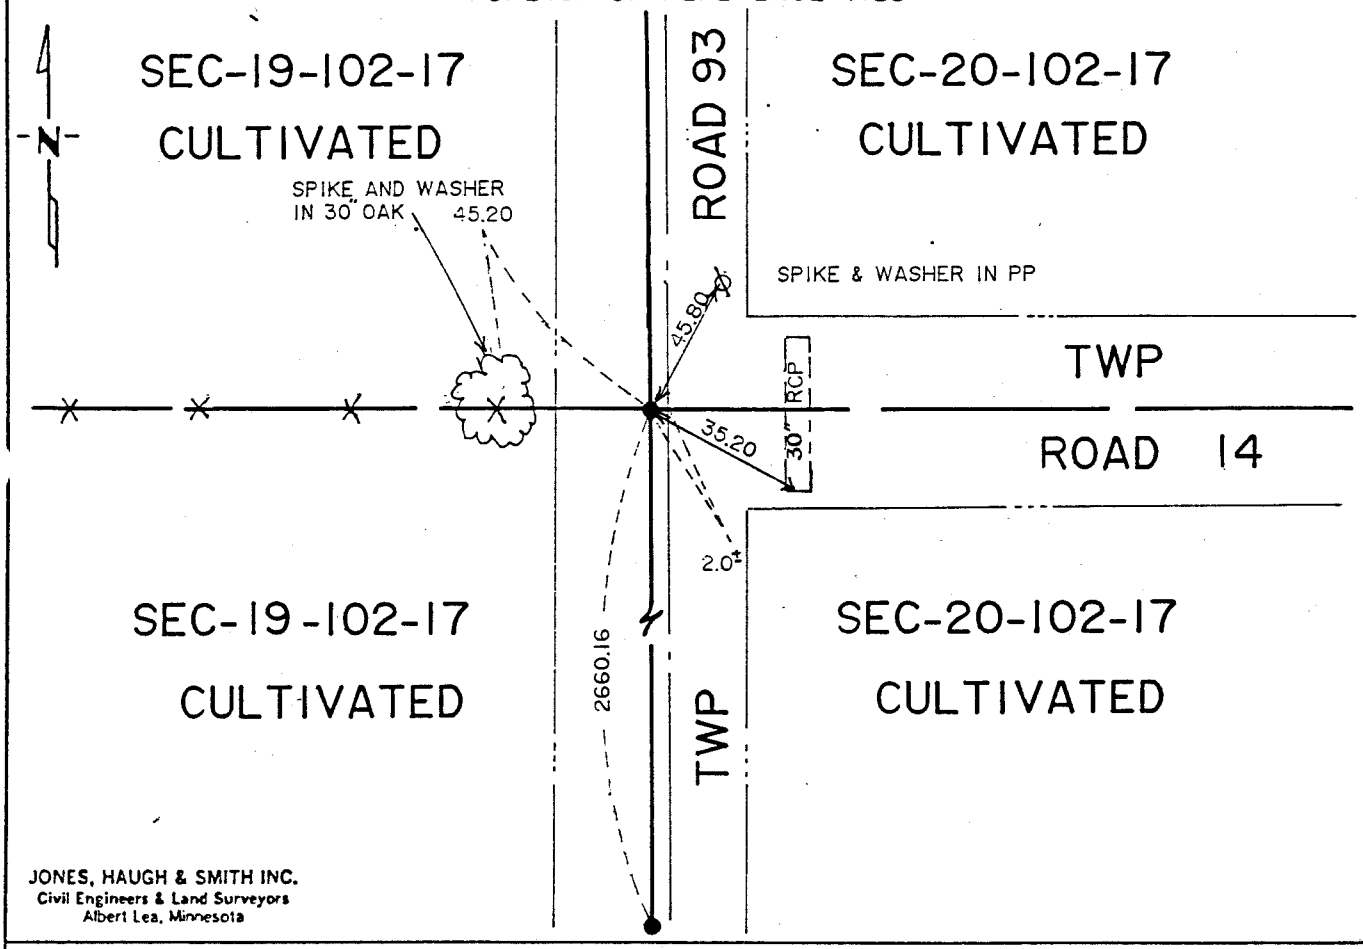

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-24-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 20-102-17

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

14" Burr Oak	S 5° W	73 links (50.16 ft)
18" Burr Oak	N 46° E	50 links (33.00 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1884 The private field notes of Claussen indicate a government post was uncovered at the W 1/4.

1992 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte IV, dug on centerline centerline of Township Road T-93 and T-14. Uncovered a 4" diameter cast iron wheel hub two feet deep. We found no further evidence. Re-set hub and set capped RLS 13807 iron over hub at the road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 20, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-30-92 (DATE) found a Cast iron wheel hub

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-30-92 (DATE) placed a capped RLS 13807 5/8" ø iron over hub

SKETCH OF REFERENCE TIES

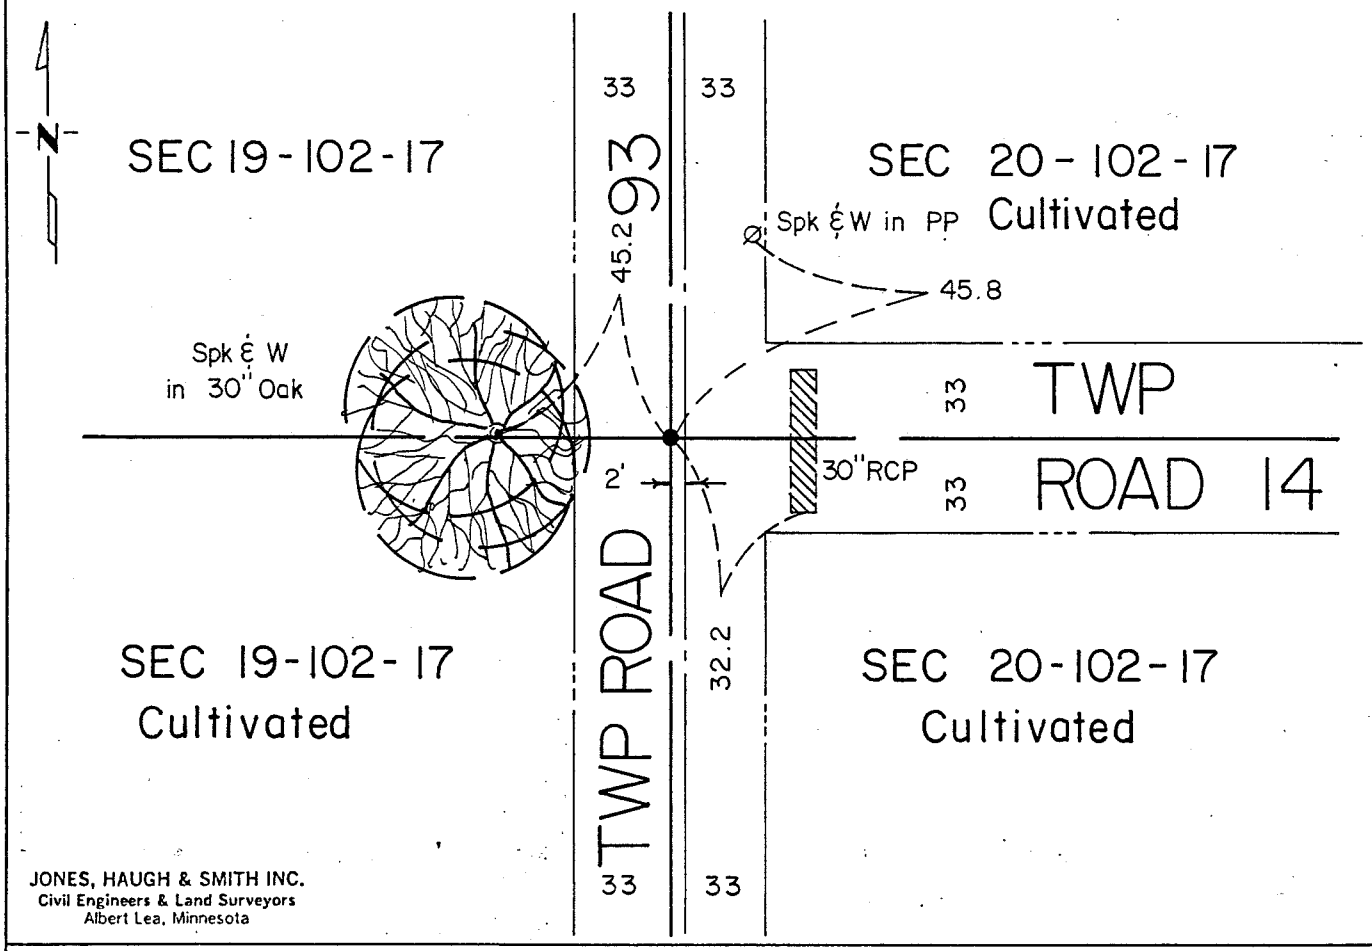

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 5-20-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 20-102-17

This corner was originally established by Deputy Surveyor Wm. I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder's Office
Ray Tucker, RLS

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1884 Clausen, County Surveyor, uncovered corner during a survey of the SE 1/4.

1992 Jones, Haugh & Smith Inc crew under the direction of John Schulte RLS, Mower County Surveyor, dug on centerline centerline of north-south-east roads and uncovered a 4" diameter cast iron wheel hub 2 feet below road surface in virgin soil. Found no further evidence of public land survey corner or a perpetuation thereof. Therefore accepted wheel hub as best evidence and set a 5/8" diameter iron capped RLS 13807 over hub on road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. 11P

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 21, Township 102 N, Range 17 W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 7-13-87 (DATE) placed a cast iron monument on road surface.

SKETCH OF REFERENCE TIES

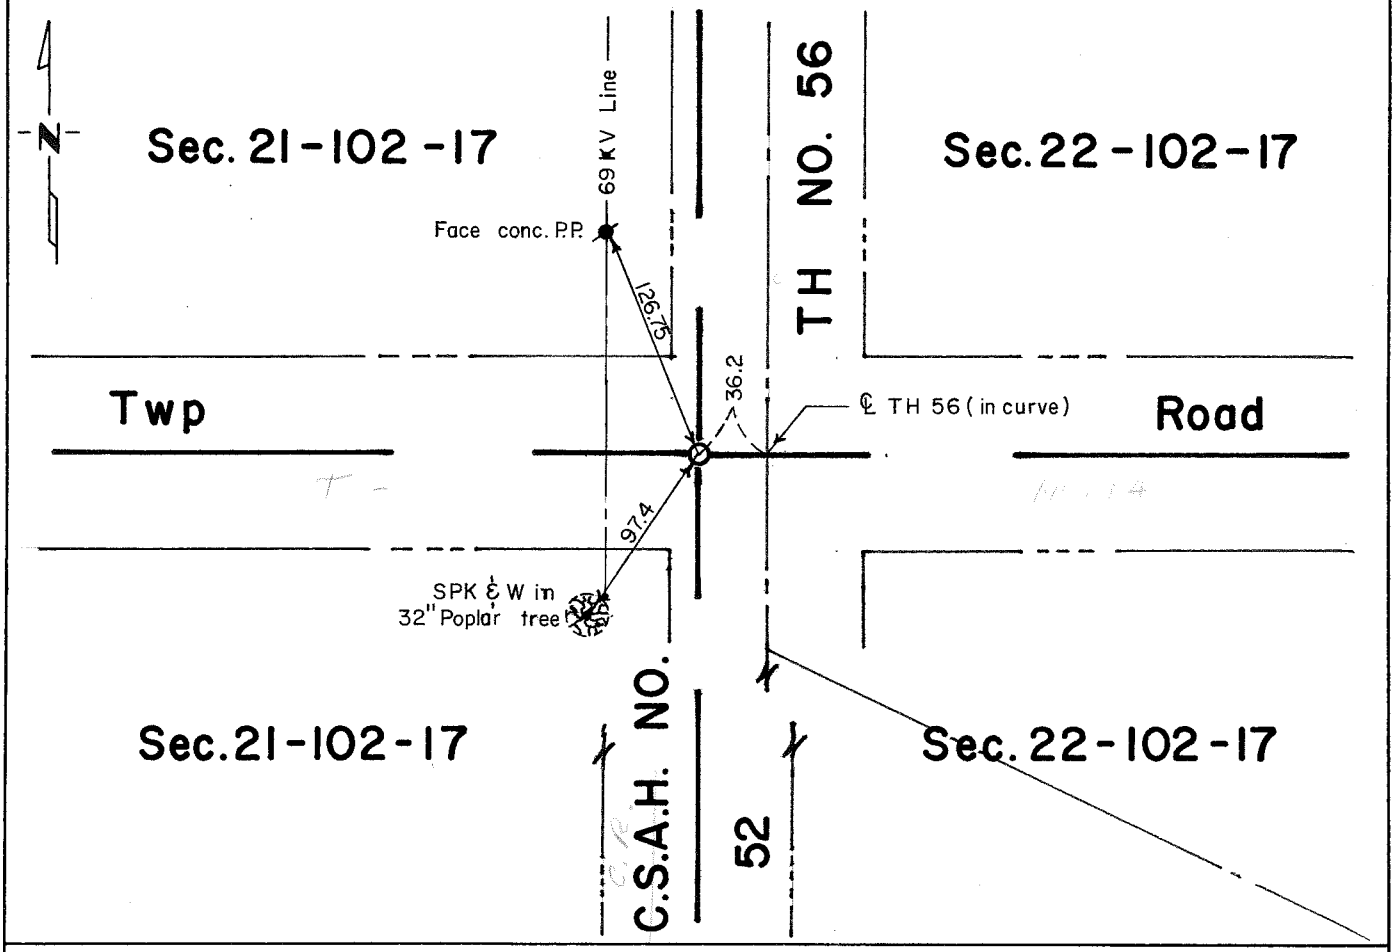

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-12-88

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
$E\frac{1}{4}$ corner Section 21-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the US General Land Office in 1854. The government notes show this corner was marked with a wood post and the following bearing trees marked:

14" Burr Oak S 16° W 385 Links

The following were contacted for section corner information:

Minnesota Department of Transportation - Rochester
Mower County Engineering Department

1950± Right-of-way stationing map on Trunk Highway No. 56 shows corner at intersection of road centerlines east-west-south, 37.6 feet west of centerline point of termination at Sta 184+86.6.

1980 Jones, Haugh & Smith crew during power line survey found no evidence of corner. Therefore established position of corner using information of Trunk Highway No. 56 right-of-way stationing map and set spike and washer.

1987 Jones, Haugh & Smith crew found a spike and washer set in 1980. Removed spike and set a cast iron monument.

The monument set fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 21, Township 102N, Range 17 W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 7-13-87 (DATE) found a 3/4" ø iron at road surface.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 7-13-87 (DATE) placed a cast iron monument on road surface over iron found.

SKETCH OF REFERENCE TIES

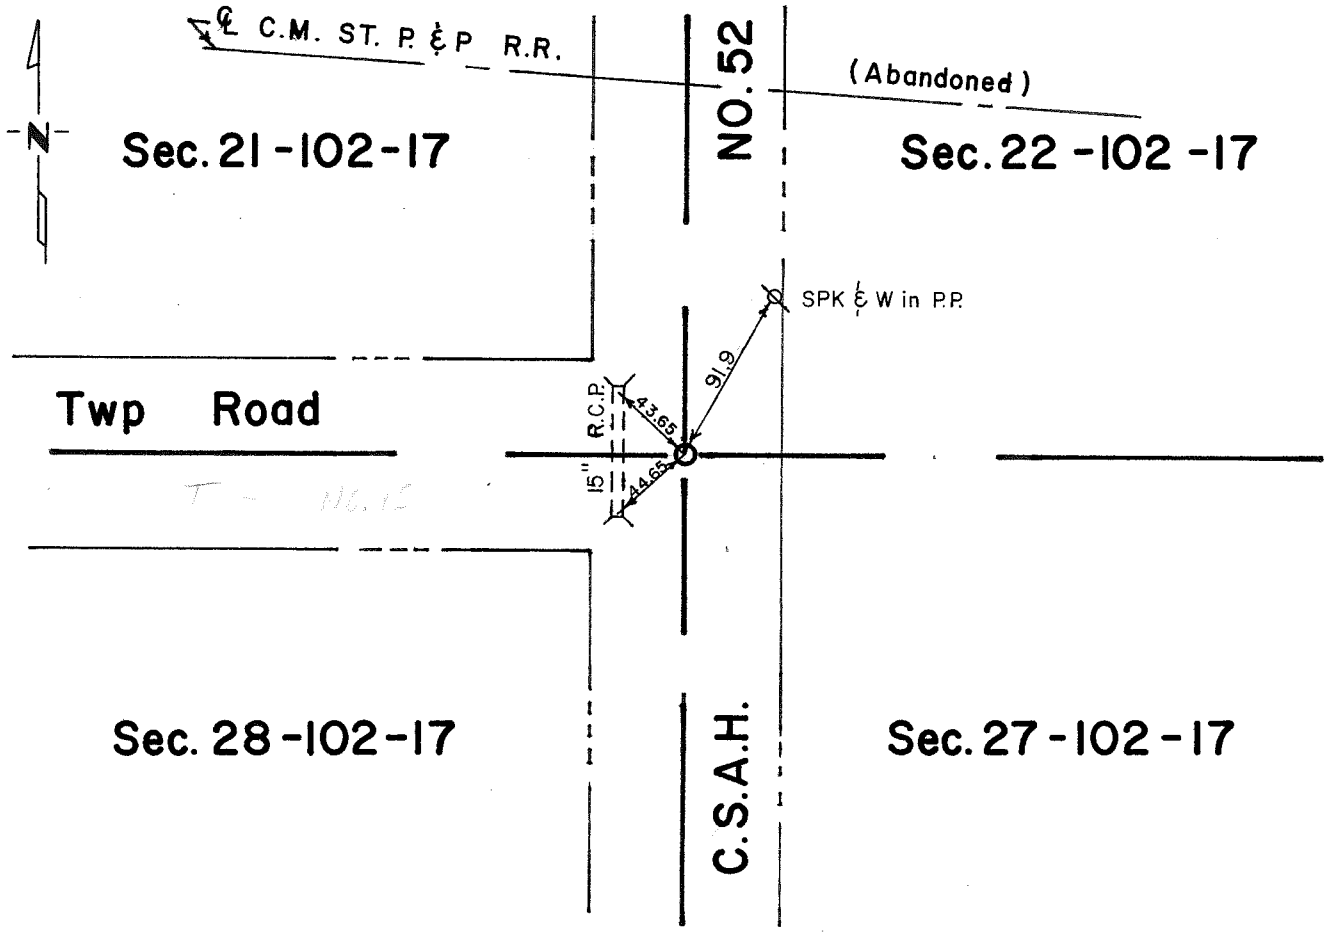

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-12-88

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
SE corner Section 21-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the US General Land Office in 1854. The government notes show this corner was marked with a wood post and charred stake with mound and trench.

The following were contacted for section corner information:

Minnesota Department of Transportation - Rochester
Mower County Engineering Department

1950± Trunk Highway No. 56 right-of-way stationing map show corner on centerline of roads north-south-west and in line with fence east 789.8 feet south of the centerline of Chicago, Milwaukee, St. Paul & Pacific Railroad.

1980 Jones, Haugh & Smith crew during a power line survey uncovered a 3/4" diameter iron on centerline centerline of roads which agreed with records which agreed with records from Minnesota Department of Transportation.

1987 Jones, Haugh & Smith crew uncovered a 3/4" diameter iron and set a cast iron monument over iron found.

The monument found agrees with records from Minnesota Department of Transportation and fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CENTER Corner of Section 22, Township 102 Range 17, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 7/25/95 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7/25/95 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

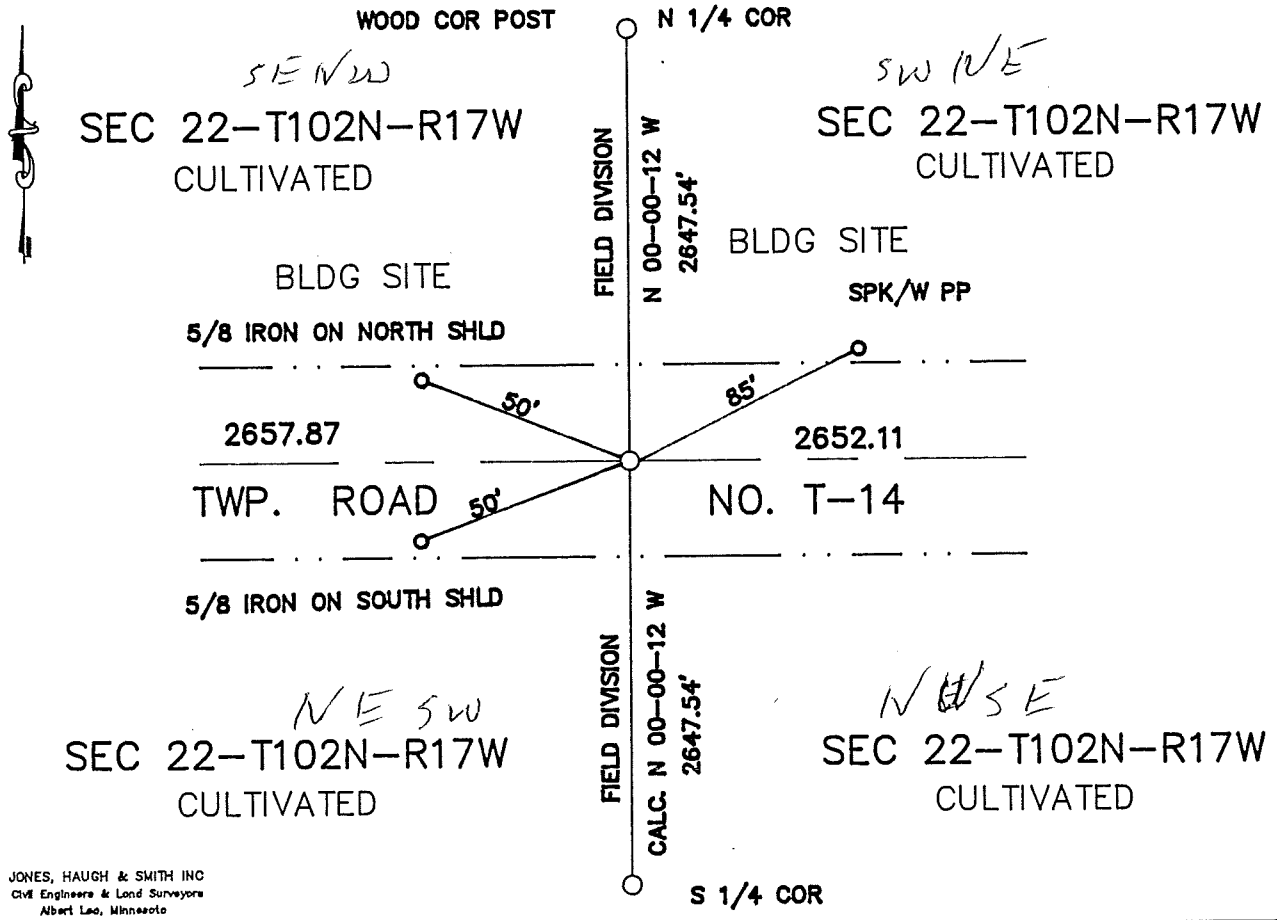

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-5-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 p .M. on the 8 day of Jan A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 441813

M.H.D. FORM NO. 2105

BOOK 90 PAGE 9 Book 90 Misc Page 9

Center SEC 22-102-17

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, placed a cast iron monument at the intersection of straight lines between the E-W and N-S 1/4 sec lines. The corner set fit fence line N-S and CL E-W road.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 22, Township 102 Range 17, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 7-25-95 (DATE) found a WOODEN POST

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-25-95 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

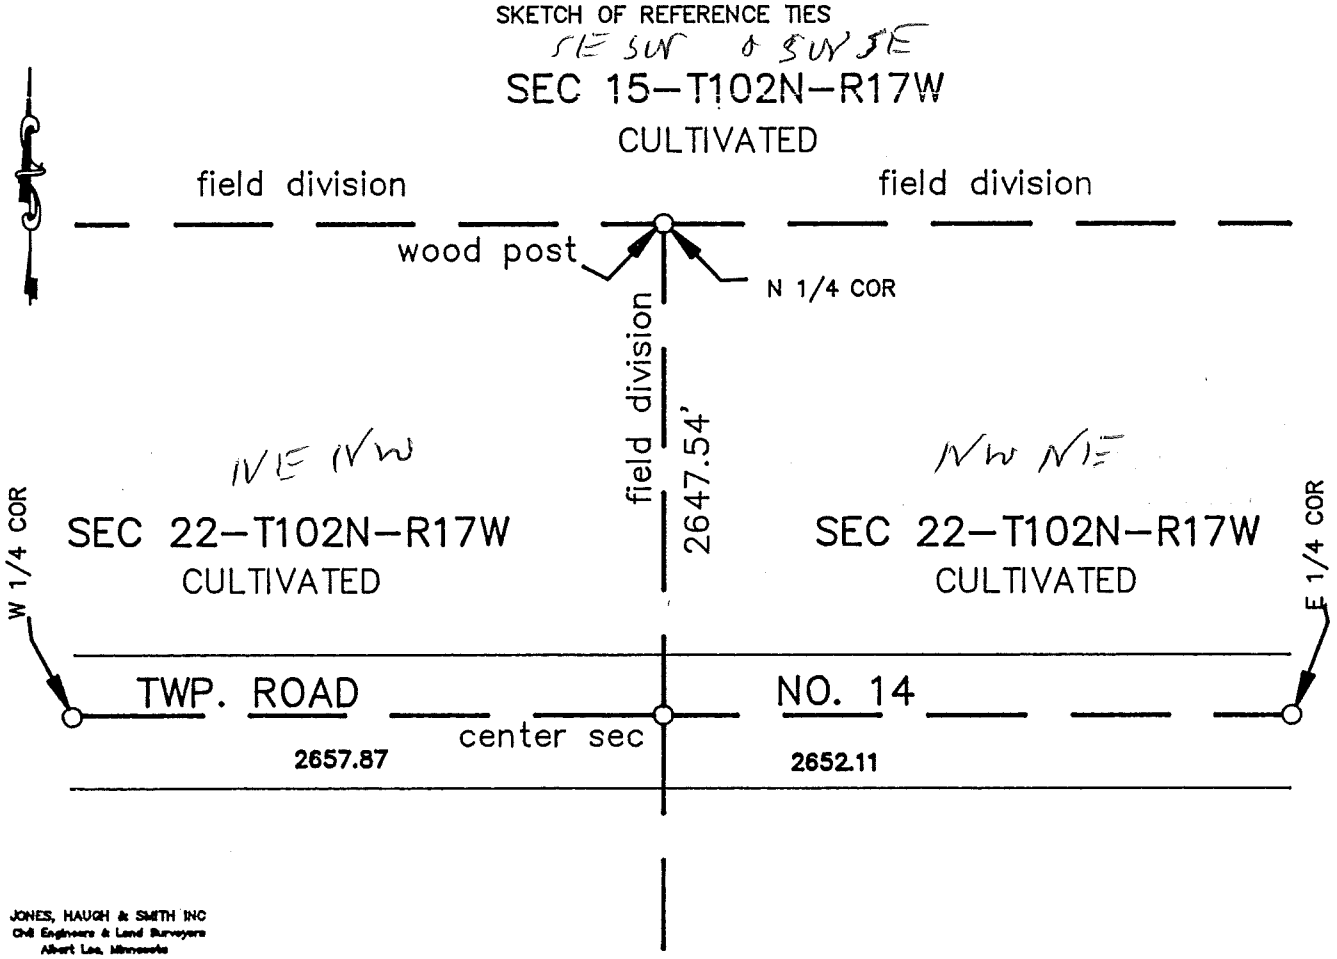

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-1-95

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 3 day of Nov A.D., 1995

COUNTY RECORDER Charles Enge

By Susan M Davis, Deputy

DOCUMENT NO. 140541

M.H.D. FORM NO. 2105 BOOK 89 PAGE 141 Book 89 Misc Page 141

N 1/4 Cor SEC 22-102-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, set a 5/8"x16" iron pin with cast iron monument over it. On east side of CFP (center fence post) which fits field divisions E-W and South and testimony by local farmers stating that this post was set in place of the old CFP when the fence line was removed.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 23, Township 102N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/25/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

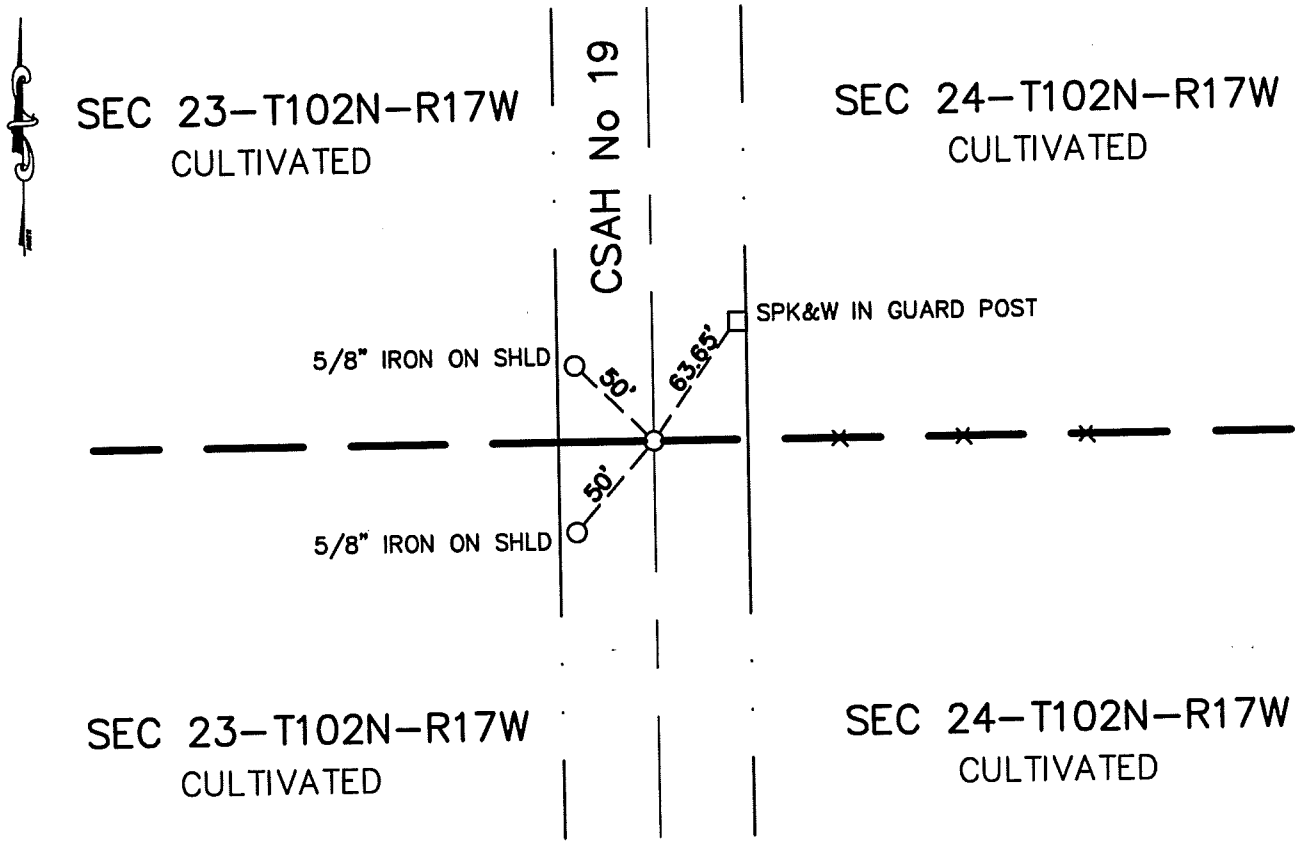

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 10-5-00 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

E 1/4 Cor SEC 23-102-17

Deputy Surveyor William Anderson of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the county backhoe at the centerline of CSAH No. 19 N-S and in line with field division east. Dug at a distance of 2647.00' south from the NE section corner. Dug to virgin soils and found no evidence of original PLS corner. Placed a cast iron monument at above-mentioned distance.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 23, Township 102N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/25/1997 (DATE) found a ROCK

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/25/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

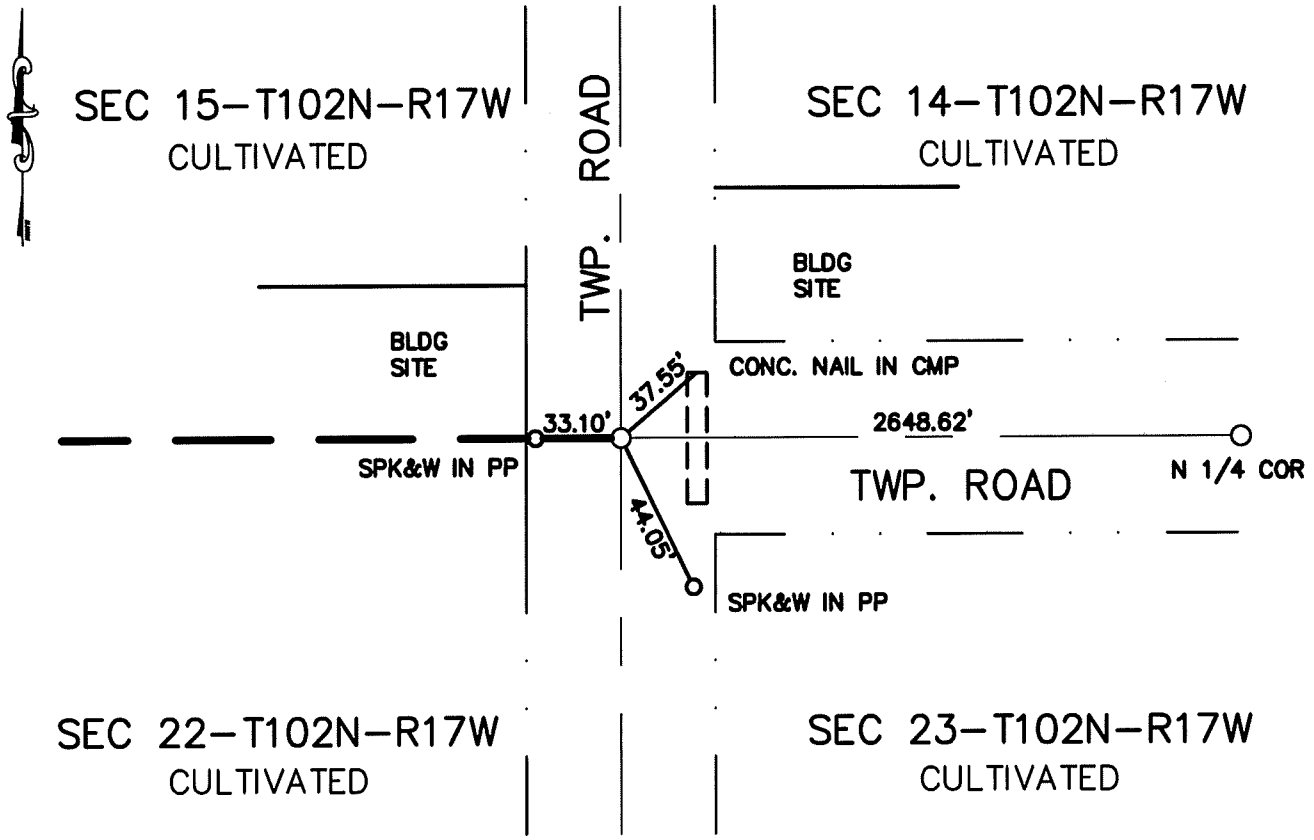

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 10-5-00
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NW Cor SEC 23-102-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the county backhoe at the intersection of township road N-S and township road east. Uncovered large rock 2.5' below road surface. Accepted rock as true corner and placed a 5/8" iron capped 13807 on the north side of rock. Placed a cast iron monument over rock 0.4' deep.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 23, Township 102N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/25/1997 (DATE) found a CONC. MONUMENT, 1/2" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/25/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

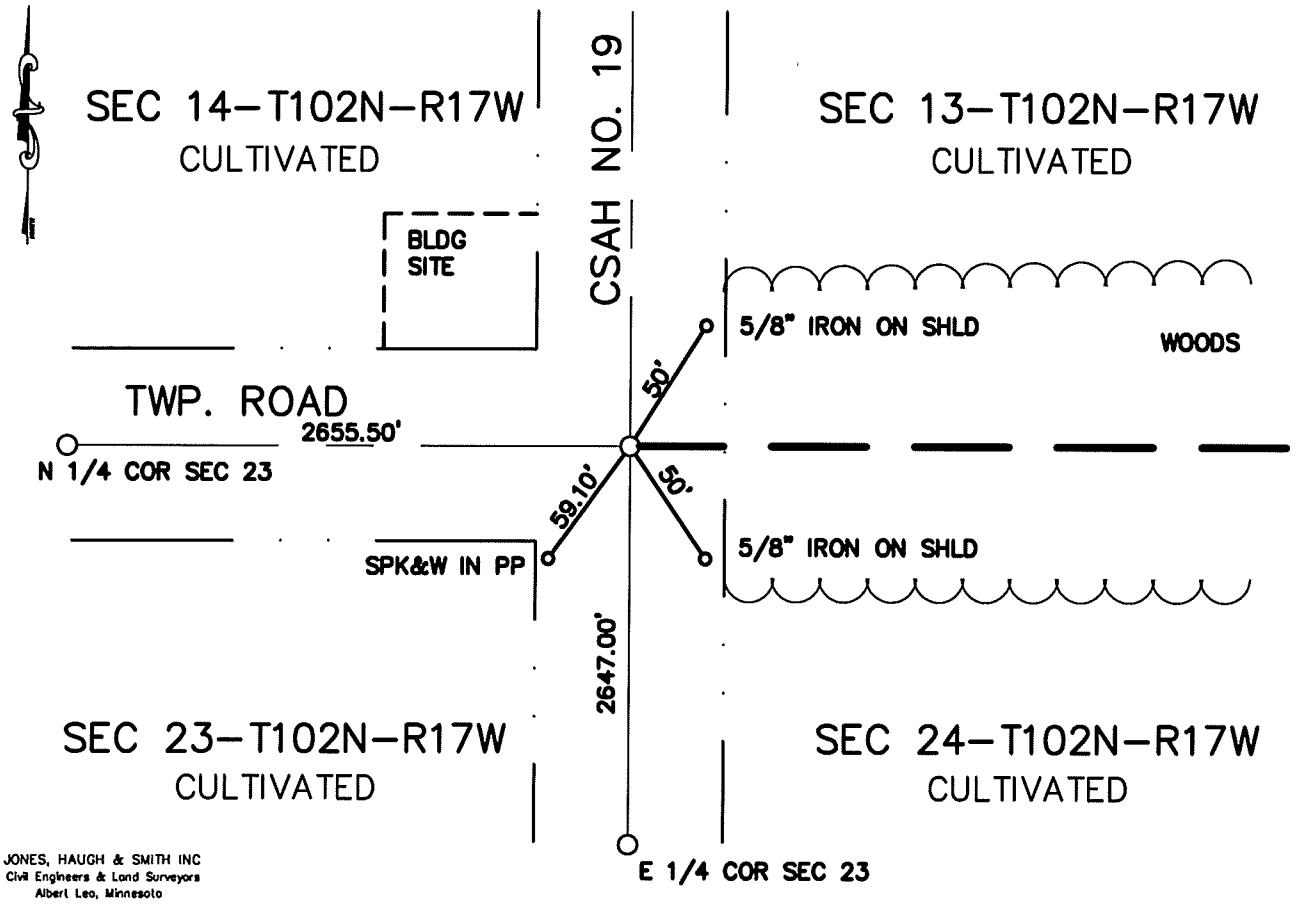

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 10-5-00 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NE Cor SEC 23-102-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the county backhoe at the intersection of CSAH No. 19 N-S and township road west. Uncovered a concrete monument with a 1/2" iron at a depth of 3.5'. Placed a cast iron monument over concrete monument found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 23, Township 102N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/25/1997 (DATE) found a CONC. MONUMENT, 1/2" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/25/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

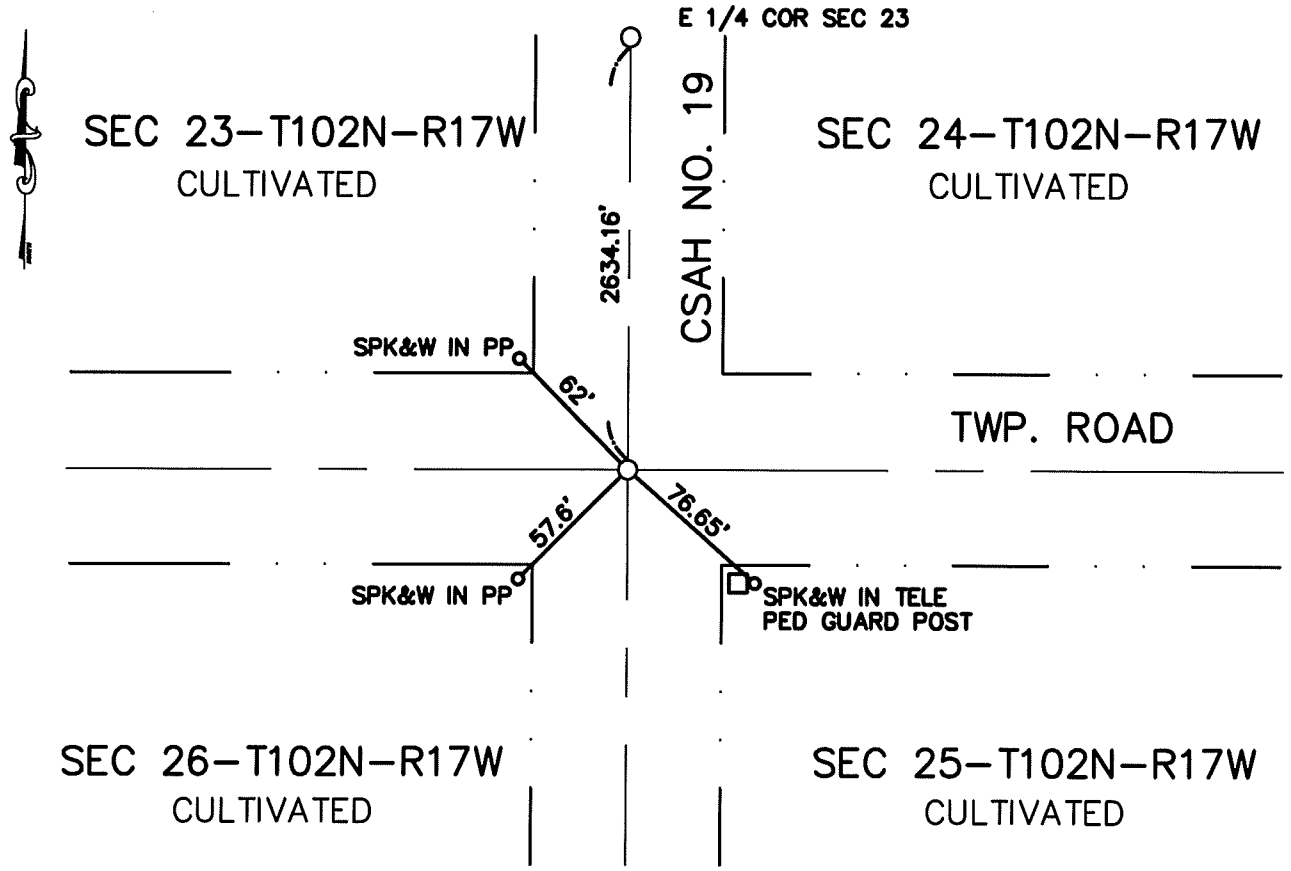

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-5-00

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SE Cor SEC 23-102-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the county backhoe at the intersection of CSAH No. 19 N-S and township road E-W. Uncovered a concrete monument with a 1/2" iron in monument. Placed a 5/8" iron capped 13807 on the north side of monument found. Placed a cast iron monument over monuments found at road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 23, Township 102N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/25/1997 (DATE) found a ROCK

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/25/1997 (DATE) placed a 5/8" IRON WITH C.I.M. OVER ROCK FOUND

SKETCH OF REFERENCE TIES

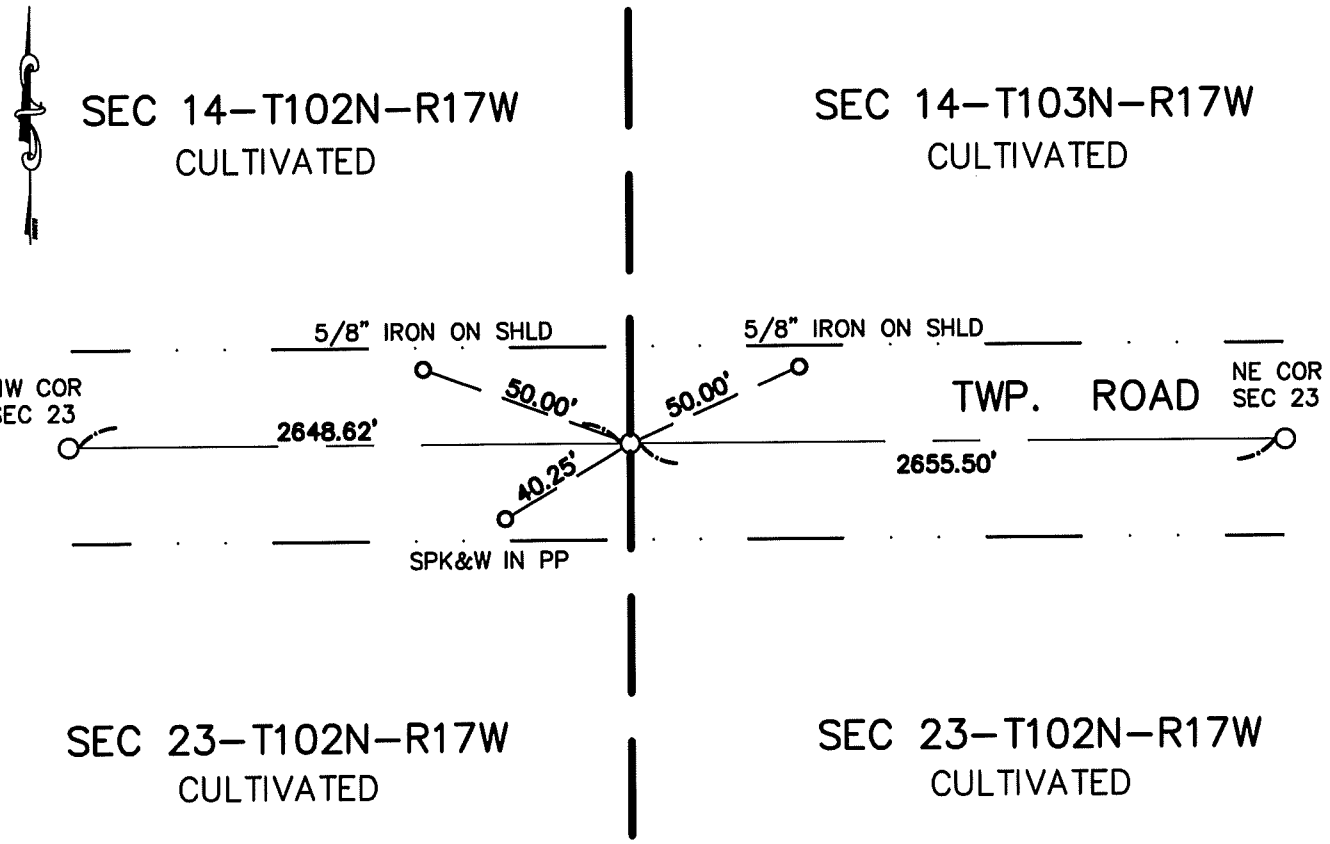

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-5-00

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

N 1/4 Cor SEC 23-102-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the county backhoe at the centerline of township road E-W and field division north. Uncovered a rock. Accepted rock as true PLS corner and placed a 5/8" iron capped 13807 on the north side of rock found. Placed a cast iron monument at road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 26, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-9-91 (DATE) found a 5/8"Ø iron over a harrison monument over a 2"x1/4"x30" long iron bar 4' deep in virgin soil.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-9-91 (DATE) placed a cast iron monument on road surface over iron bar found.

SKETCH OF REFERENCE TIES

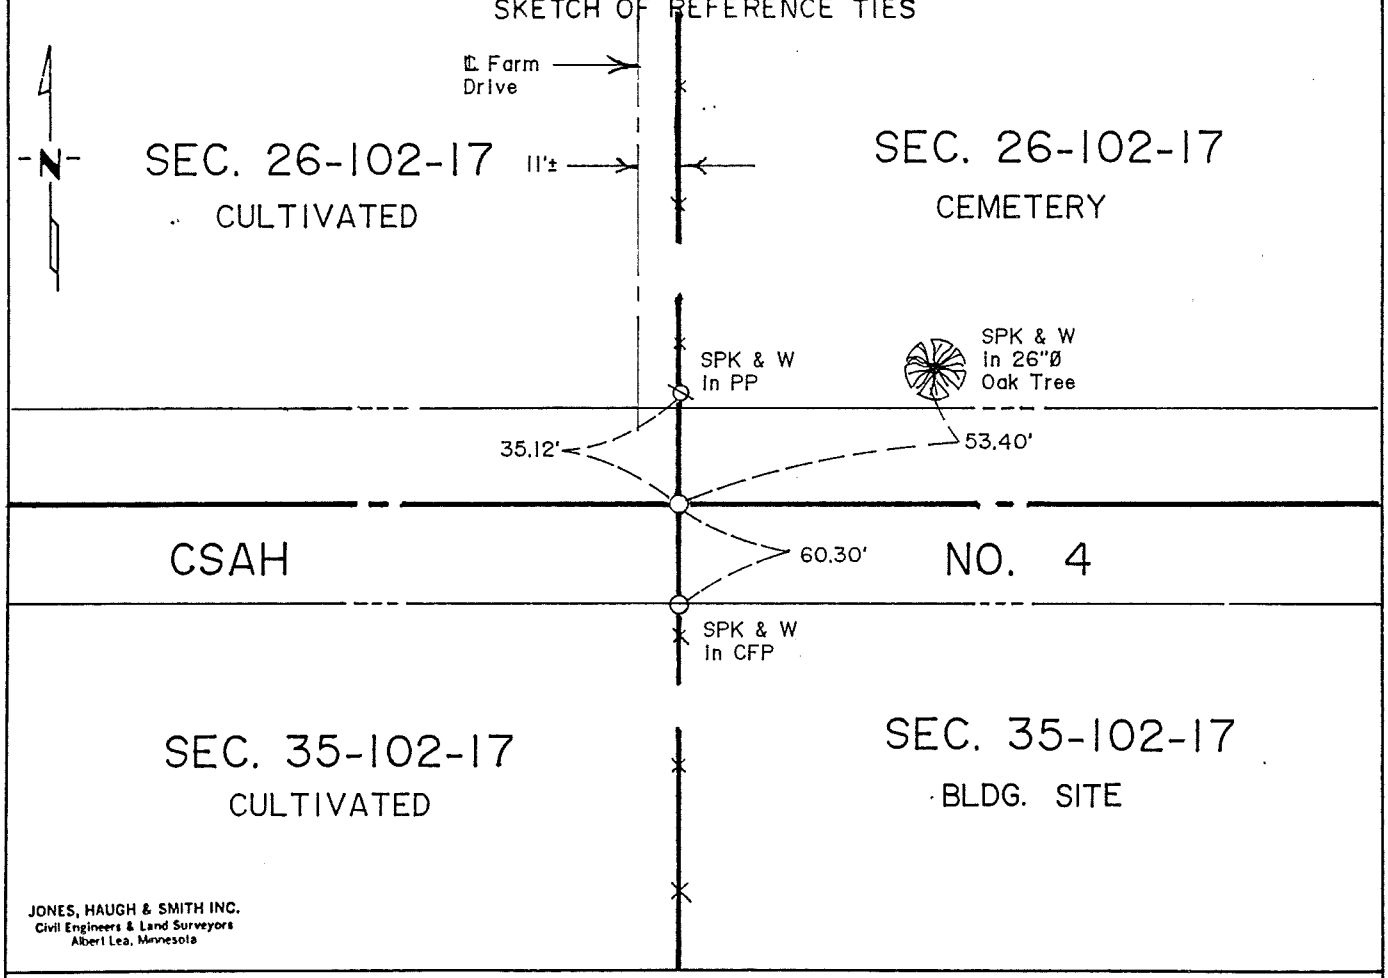

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 5-16-91
SIGNATURE DATE

Registration No. 13607

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Section 26-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

8" Burr Oak	N 65° E	80 links (52.8 ft)
6" Burr Oak	S 10° E	95 links (62.7 ft)

The following were contacted for section information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner:

1892 Clausen, Mower County Surveyor 1880-1892, field notes show inplace a 26" x 1 1/4" x 1/2" iron and a government post 9.4' north of a straight line.

1976 Jones, Haugh & Smith Inc crew used County ties to locate corners. Placed a P.K. nail on centerline of E-W road in line with fence south.

1977 Jones, Haugh & Smith Inc crew uncovered a cast iron monument. Placed a 5/8" diameter iron over monument found.

1977 Jones, Haugh & Smith Inc crew found a 5/8" diameter iron during survey in E 1/2 SW 1/4 in Section 26-102-17.

1984 Jones, Haugh & Smith Inc crew found a 5/8" diameter iron 0.3' below surface on centerline of E-W road in line with fence south.

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, dug with the Mower County backhoe on centerline of E-W road in line with N-S fences for bituminous overlay project SAP 50-604-18. Dug a 4' x 6' x 5' deep hole and found a 5/8" diameter iron 0.5' deep over a harrison cast iron monument 2' below road surface. Continued digging and uncovered a 2" x 1/4" x 30" long iron bar 4' deep in virgin soil. Set a cast iron monument on road surface over iron bar.

The monument fits and agrees with past records and occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 27, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-9-91 (DATE) found a large pointed field stone 4' deep in virgin soil on ℄ of E-W road

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-9-91 (DATE) placed a 5/8"Ø iron on West side of stone found and a cast iron monument over at road surface.

SKETCH OF REFERENCE TIES

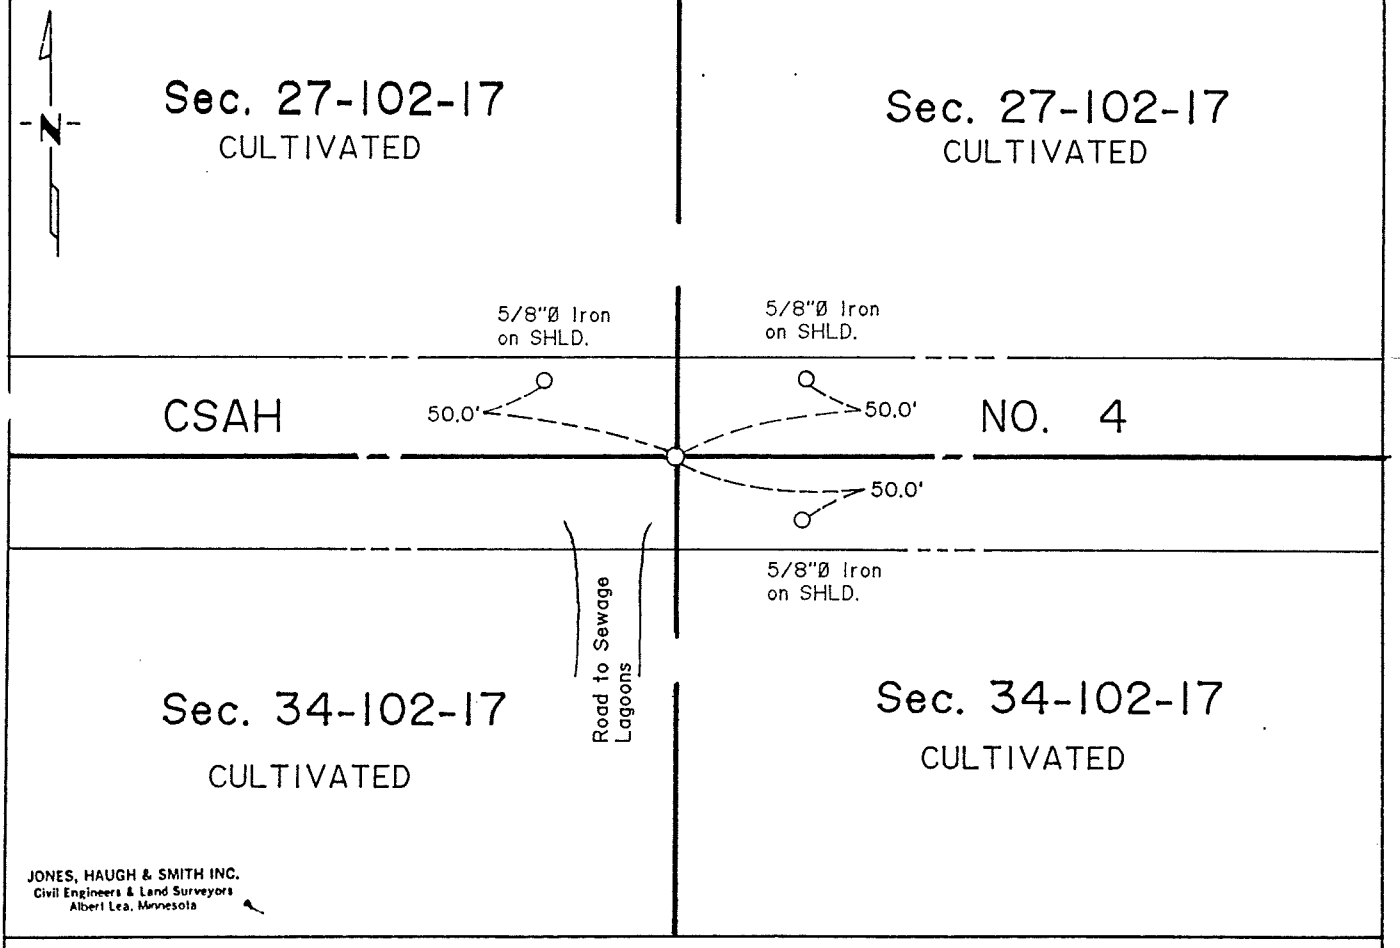

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-16-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Section 27-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post and a charred stake were set with a mound of earth and trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner:

1890 Clausen, County Surveyor 1880-1892, field notes show a government post inplace.

1930 Book "A" in the Mower County Engineering Office shows a corner inplace at Sta. 204+59.3. The following ties were taken:

48.3' SE to CFP
32.5' W to "Big 4" Rock.
64.5' SW to Oak tree.

1991 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte, dug with the Mower County backhoe on centerline of E-W road for bituminous overlay project #SAP 50-604-18. Dug a 4' x 20' x 4' deep hole and 4 feet more or less East of midpoint. Uncovered a large pointed field stone in virgin soil. Continued digging and found no further evidence of PLS corner. Placed a 5/8" diameter x 18" long iron on the west side of the stone and set a cast iron monument over stone on road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 27, Township 102N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/25/1995 (DATE) found a 3" DIAMETER PIPE IN CONCRETE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a –

SKETCH OF REFERENCE TIES

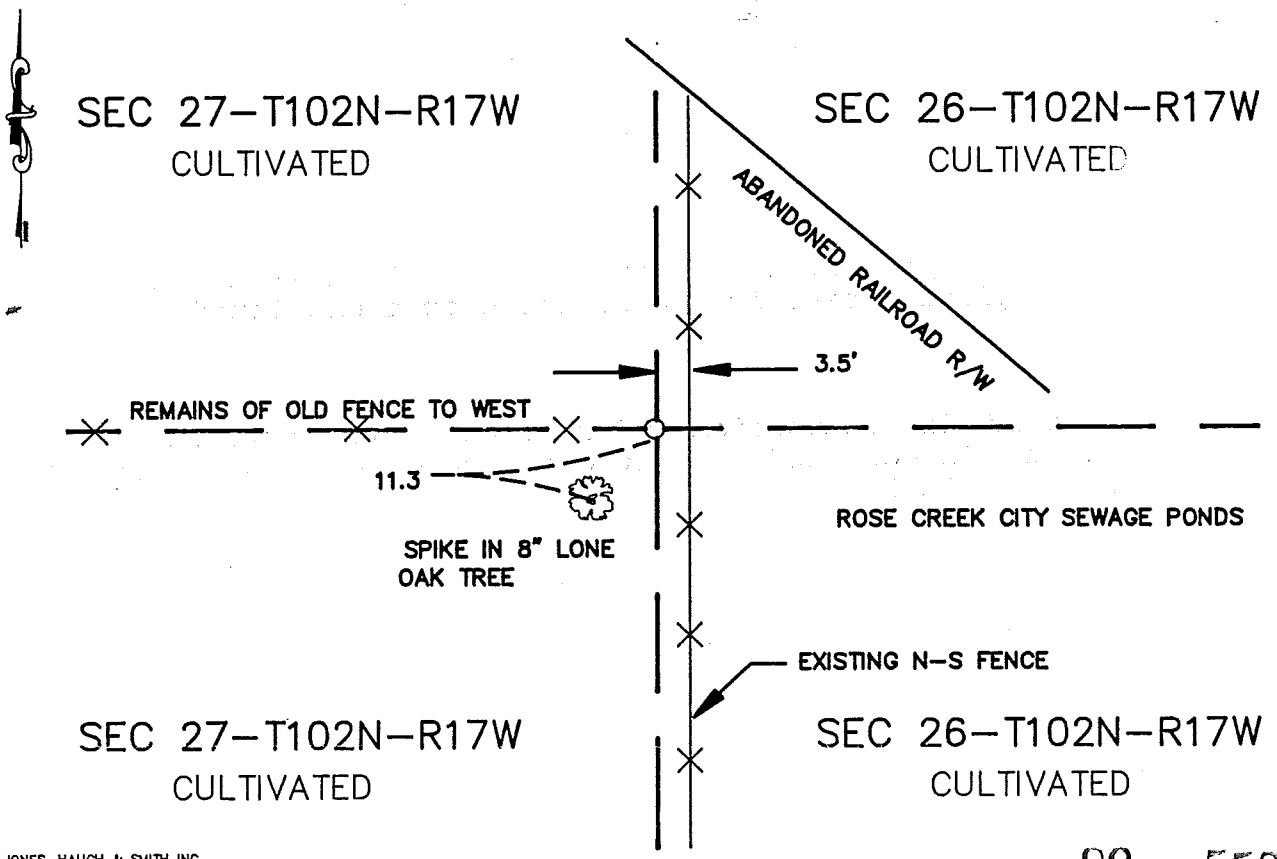

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 89 PAGE 552

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 12-27-95 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 2 day of Jan A.D., 19 96

COUNTY RECORDER Charles Enger

By Susan M Davis, Deputy

DOCUMENT NO. 441688

M.H.D. FORM NO. 2105

Book 89 Misc Page 552

E 1/4 Cor SEC 27-102-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found a 3" pipe in concrete at intersection of fence lines E-N-S.

1995 Roger Brand found 3" pipe in conc. and took ties as shown.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 27, Township 102N, Range 17W, 5th P.M.

TATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-9-91 (DATE) found a harrison cast iron monument 1' below road surface over a 5"Ø concrete monument with 1/2"Ø iron in center.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-9-91 (DATE) placed a cast iron monument on road surface over concrete monument found.

SKETCH OF REFERENCE TIES

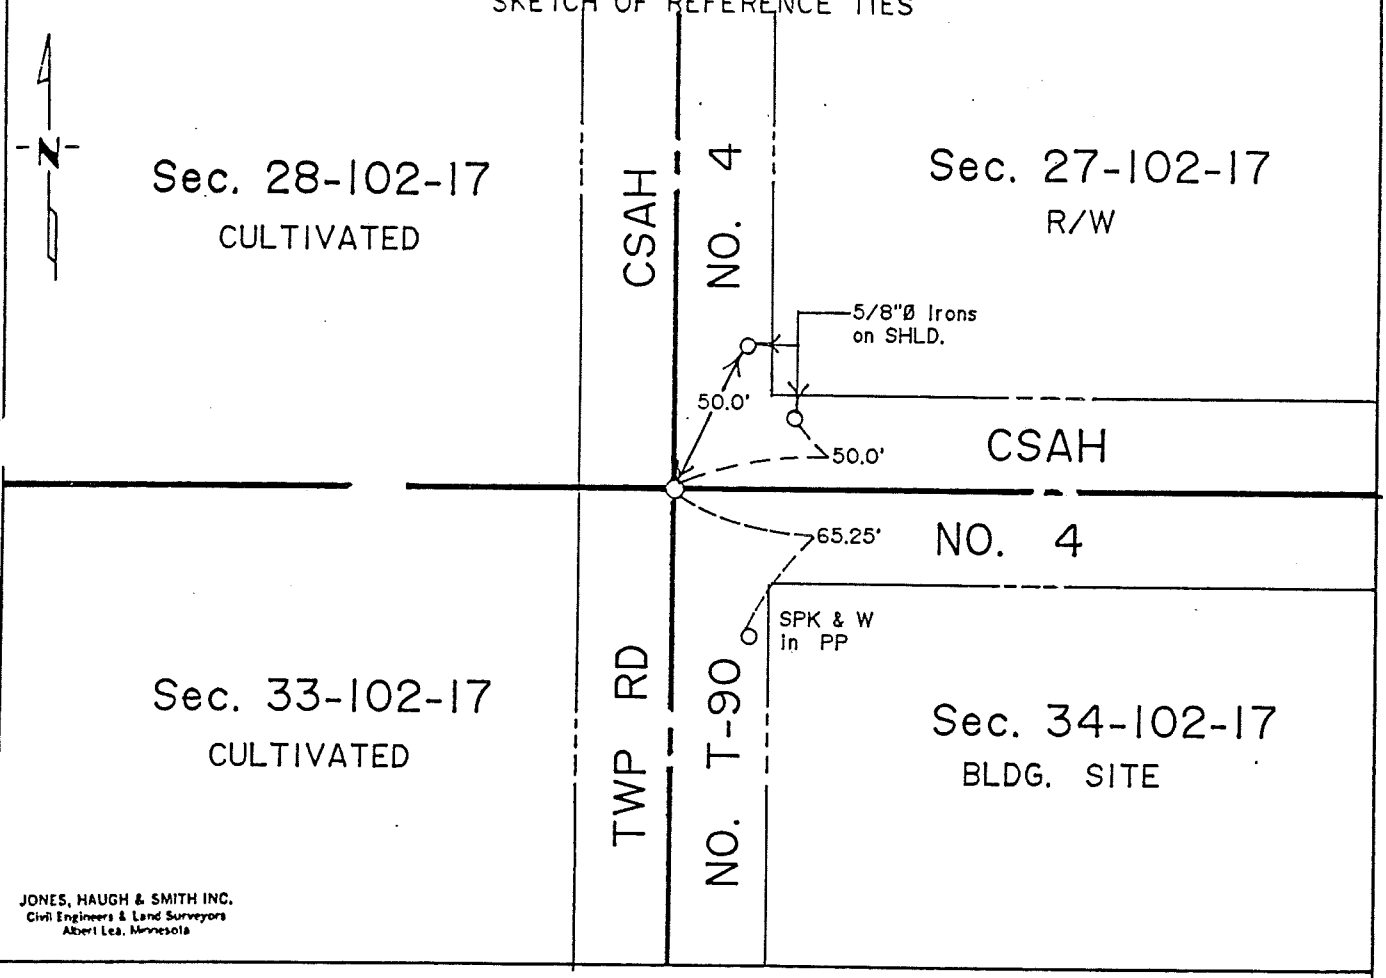

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-16-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec 27-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post and charred stake were set with a mound of earth and trench.

The following were contacted for section information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1890 Clausen, Mower County Surveyor 1880-1892, field notes show a government post inplace.

1930 Book "A" in the Mower County Engineering Office shows a corner inplace at Sta 240+59.3. The following ties were taken:

48.3' SE to CFP
32.5' W to "Big 4" rock
64.5' SW to Oak tree

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte IV, dug with the County backhoe on centerline of north-south-east road for bituminous overlay project SAP 50-604-18. Dug a 4'x8'x6' deep hole and uncovered a harrison cast iron monument 1.0 feet below the surface. Continued digging and found a 5" diameter concrete monument with a 1/2" diameter iron center 3 feet deep in virgin soil. Placed a cast iron monument on road surface over the concrete monument found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 27, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-7-91 (DATE) found a harrison cast iron monument over a 5"Ø concrete monument in clay tile.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-7-91 (DATE) placed a cast iron monument over concrete monument found.

SKETCH OF REFERENCE TIES

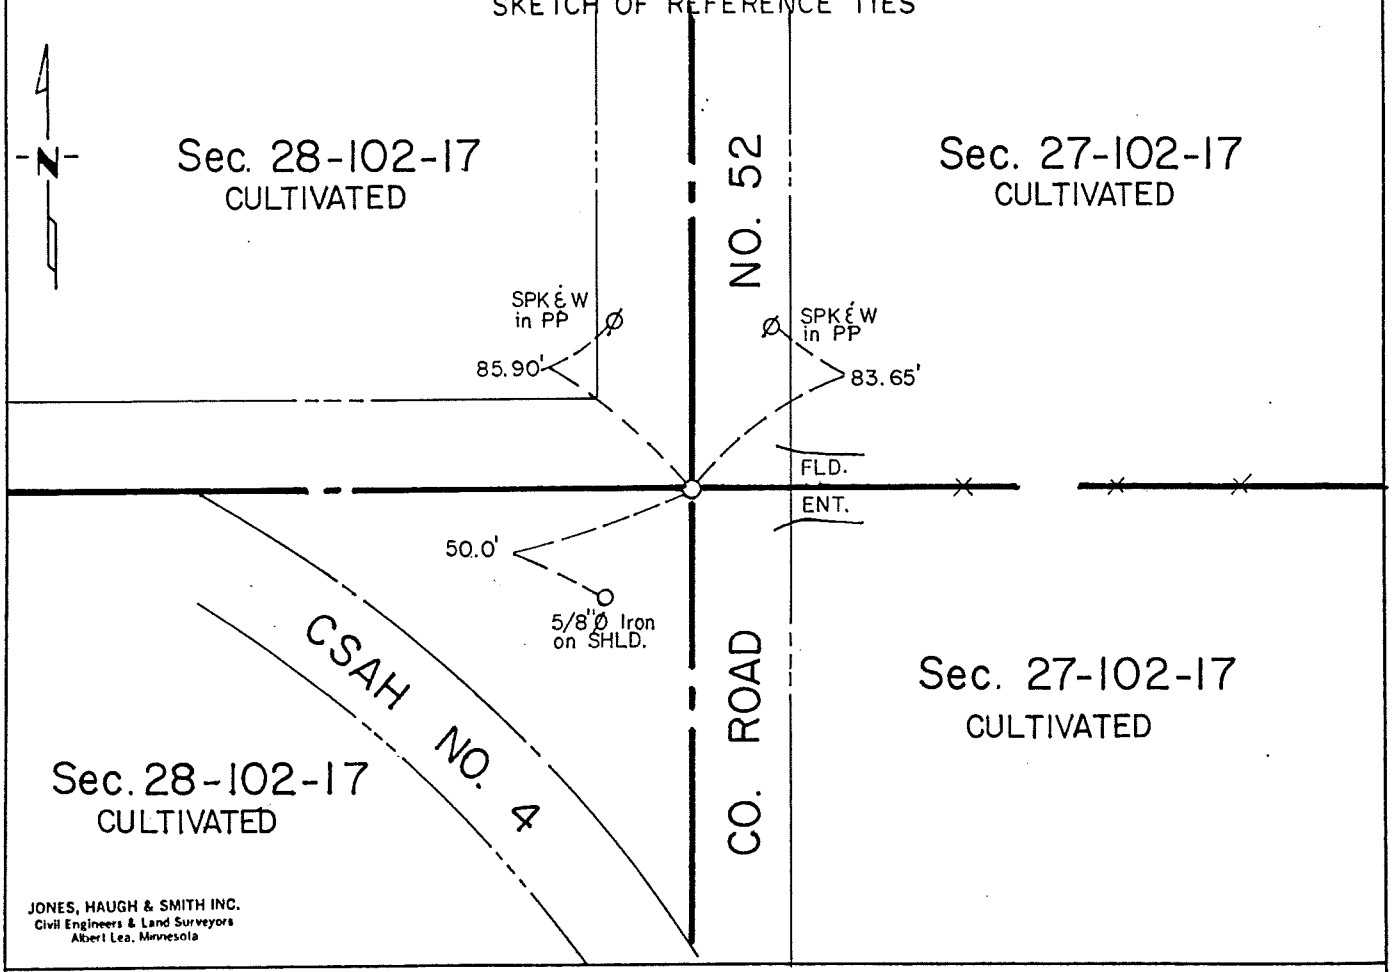

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-9-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 27-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a charred stake was set with a mound of earth and trench.

The following were contacted for section corner information:
- Mower County Highway Department
- Mower County Recorder
- Zenk Engineering
- Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1930 County Grading Plan SAH #20 shows a monument inplace and ties taken and recorded in Book "A" in the office of the County Engineer.

1951 Revised notes in Book "A", a concrete monument was uncovered and new ties were taken.

1991 Jones, Haugh & Smith crew, under the direction of John H. Schulte, dug with the County backhoe on the centerline of County Roads and uncovered a harrison cast iron monument 2' below road surface. Continued digging and uncovered a 6" diameter clay tile with 1/2 diameter iron cast in concrete in the center of the tile. Left monument as found and placed cast iron monument over it on the road surface.

The monument agrees with past records and fits occupationand road centerlines within the section and is accepted asbest evidence of a perpetuation of the original publicland survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 27, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-9-91 (DATE) found a large pointed field stone 4' deep in virgin soil on ℄ of E-W road

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-9-91 (DATE) placed a 5/8"Ø iron on West side of stone found and a cast iron monument over at road surface.

SKETCH OF REFERENCE TIES

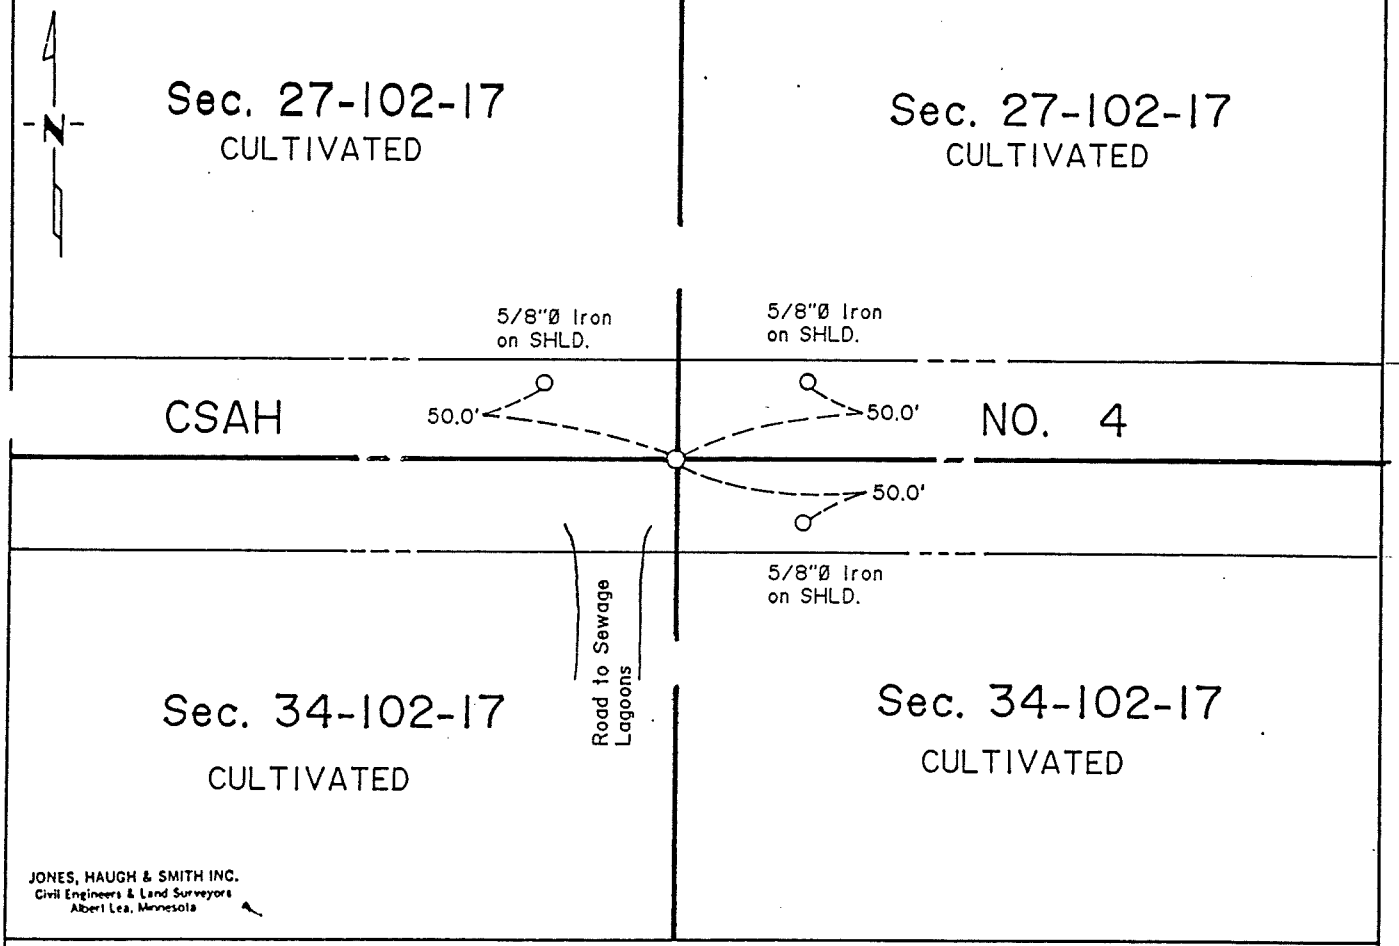

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ 5-16-91
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Sec 27-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post and charred stake were set with a mound of earth and trench.

The following were contacted for section information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner:

1890 Clausen, Mower County Surveyor 1880-1892, field notes show a government post inplace.

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte IV, dug with the County backhoe on centerline of east-west road for bituminous overlay project SAP 50-604-18. Dug a 4'x20'x4' deep hole and four feet more or less, east of midpoint. Uncovered a large pointed field stone in virgin soil. Continued digging and found no further evidence of public land survey corner. Placed a 5/8" diameter x 18" long iron on the west side of the stone and set a cast iron monument over stone on road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 27, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-9-91 (DATE) found a railroad spike flush with surface over a harrison monument 3' deep.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-9-91 (DATE) placed a cast iron monument on road surface at same location of monument found.

SKETCH OF REFERENCE TIES

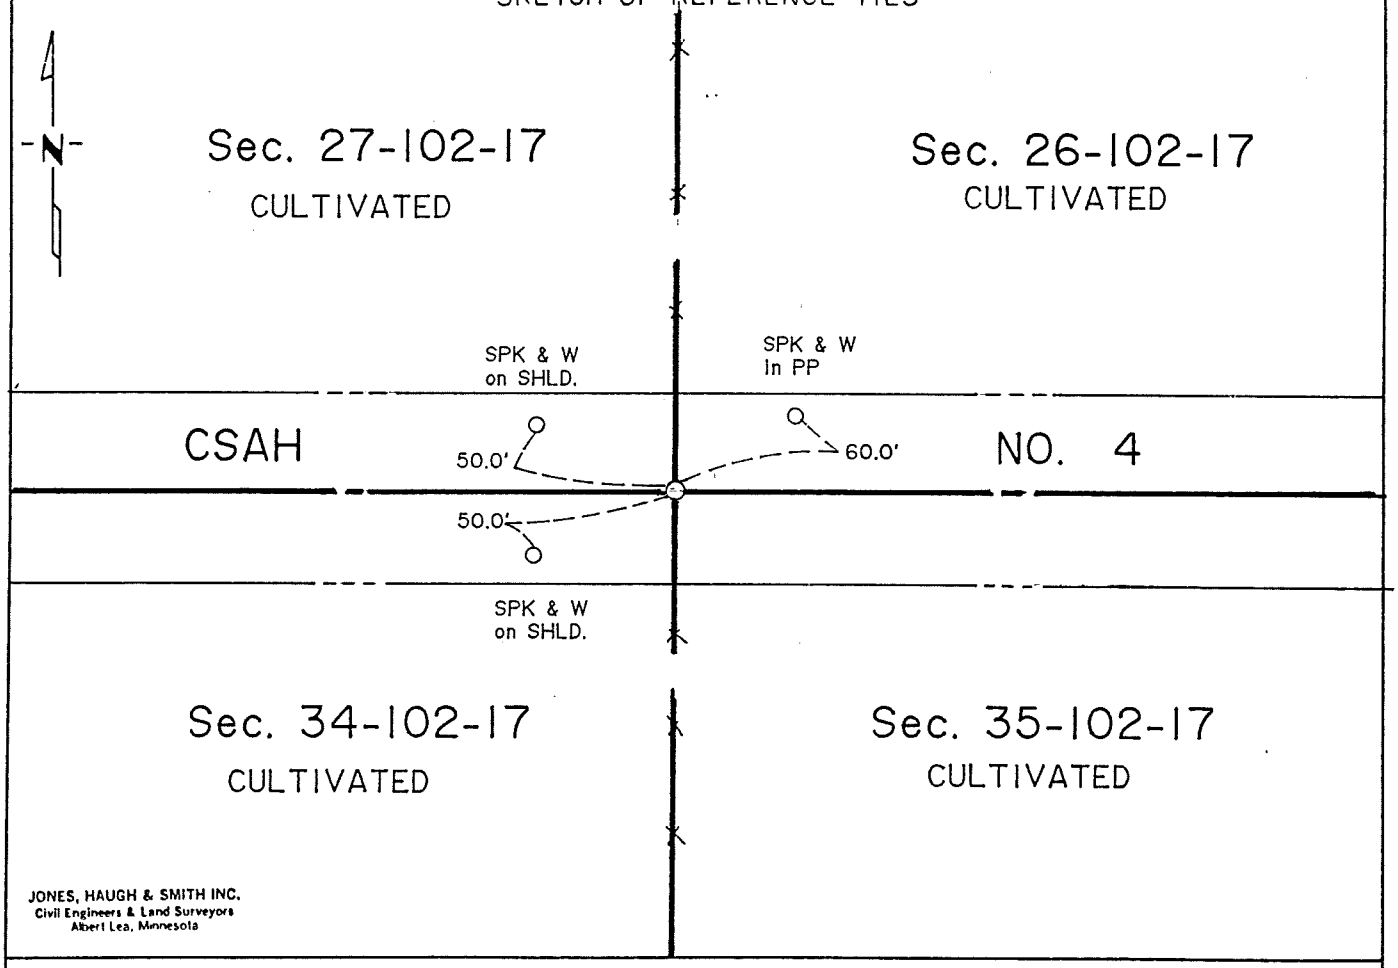

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ SIGNATURE 5-16-91 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Section 27-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post and a charred stake were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1890 Clausen, County Surveyor 1880-1892, field notes show a Government post inplace.

1892 Clausen field notes show a stone inplace.

1976 Jones, Haugh & Smith Inc crew placed a P.K. nail on centerline of E-W road in line with N-S fence.

1977 Jones, Haugh & Smith Inc crew uncovered a railroad spike during a survey E 1/2 SW 1/4 in Section 26-102-17.

1984 Jones, Haugh & Smith Inc crew during a survey in SE 1/4 SW 1/4 Section 26-102-17 uncovered a railroad spike flush with surface on centerline of E-W road in line with N-S fences.

1991 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte, dug with the Mower County backhoe at location of railroad spike flush on centerline of E-W road in line with N-S fences for bituminous overlay SAP 50-604-18. Dug a 4' x 8' x 5' deep hole and found the lower portion of a harrison cast iron monument 3.0' below the surface. Continued digging and found no further evidence of public land survey corner. Placed a cast iron monument on road surface at the same location as the monument found.

The monument fits and agrees with past records and occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 28, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-9-91 (DATE) found a monkey wrench setting vertical 4.5' below surface over a rotted post.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-9-91 (DATE) placed a cast iron monument on road surface at same location of of wrench found.

SKETCH OF REFERENCE TIES

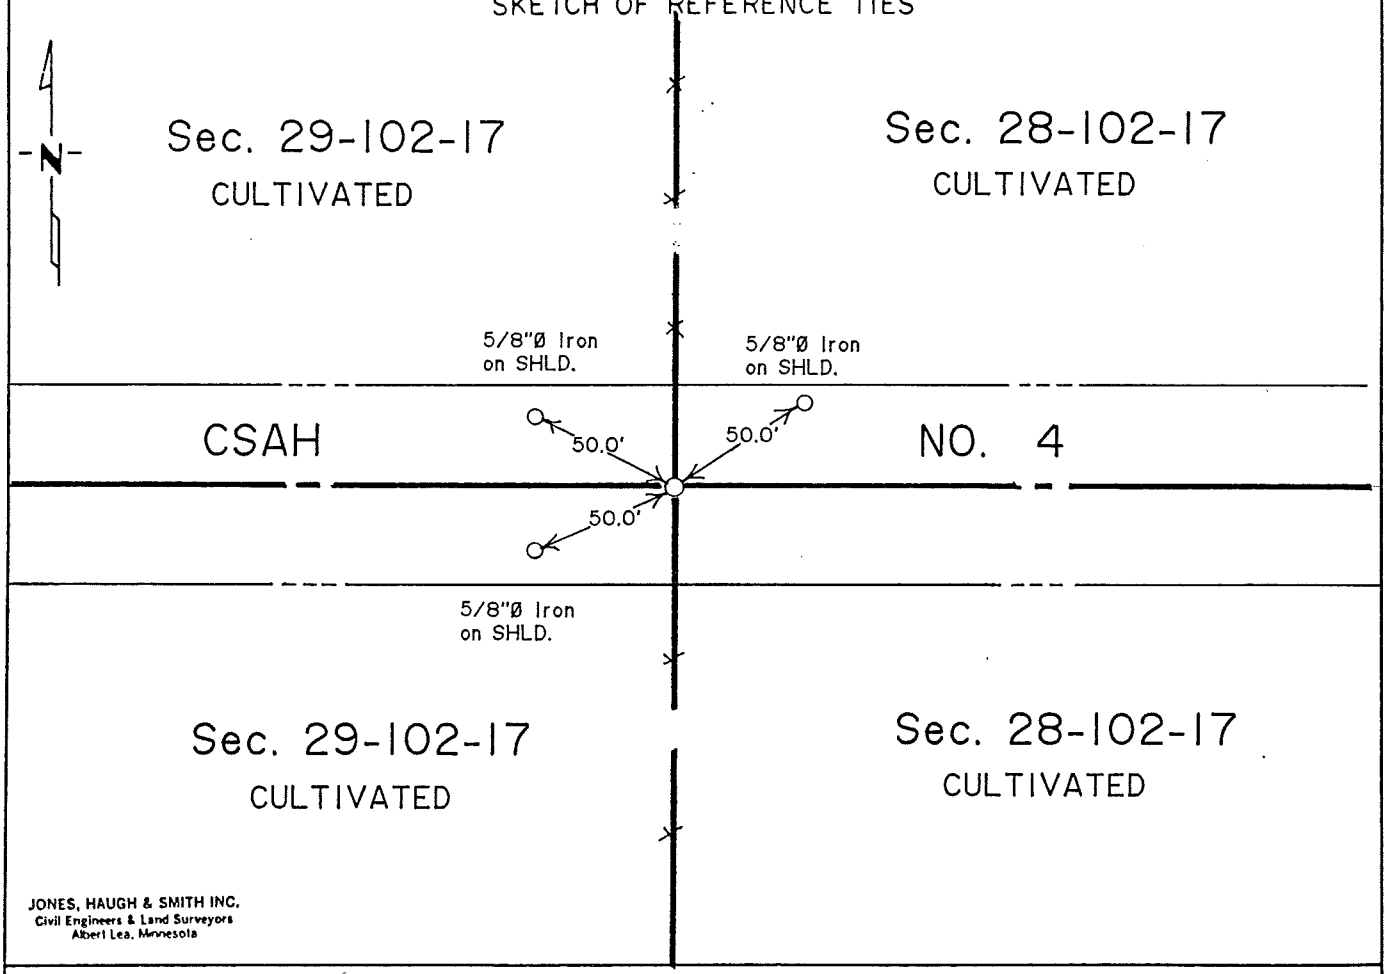

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-16-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 28-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post and charred stake were set with a mound of earth and trench.

The following were contacted for section information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1930 Book "A" in the Mower County Engineering Office shows a corner at Sta. 161+39.6. The following ties were recorded:
50.1' SE to willow tree
34.8' SSE to willow tree
33.6' SW to rock
50.6' N to 4th F.P.

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, dug with the Mower County backhoe on centerline N-S-E-W road in line with N-S fences for bituminous overlay project #SAP 50-604-18. Excavated a 8' x 8' x 7' deep hole and uncovered a large sand deposit 3 feet wide and 6" long on road centerline. Appears corner may have been dug before. Continued digging and uncovered an old monkey wrench setting vertical 4.5' below surface over a rotted post bent over. Placed a cast iron monument on road surface at the same location of the wrench found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 30, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-9-91 (DATE) found a 5/8"Ø×12" iron over a harrison cast iron monument over a 2"sq.X14" wood stake.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-9-91 (DATE) placed a cast iron monument at location of monument found.

SKETCH OF REFERENCE TIES

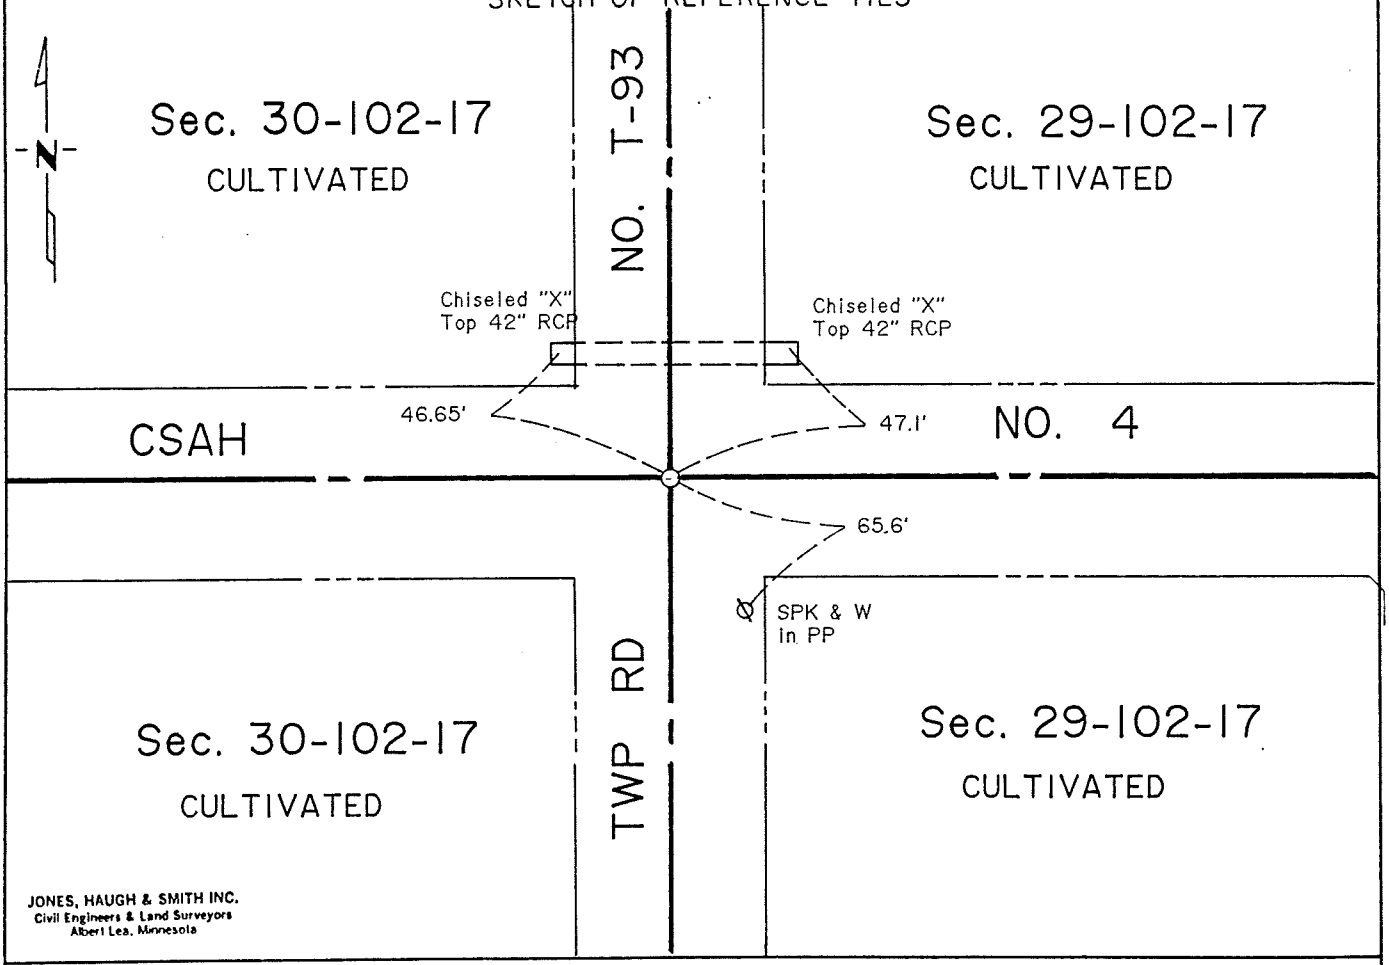

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-16-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Section 30-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:
10" Burr Oak N 20° W 60 links (399.3 ft)

The following were contacted for section information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner:

1888 Clausen Mower County Surveyor from 1880-1892 field notes show a post inplace and chaining notes are given.

Book "A" in the Mower County Engineering Office shows corners inplace as Station 108+47.0. The following ties were taken:
51.0' NE to 3rd fence post
48.2' NW to CFP
45.7 SW to NE corner concrete post
54.5' SW to telephone pole

1982 Jones, Haugh & Smith Inc crew uncovered a concrete monument at Sta. 108+47.0 on centerline roads. Ties were checked and all are still intact.

1985 Jones, Haugh & Smith Inc crew located monument for survey in NE 1/4 N 1/2 NE 1/4 Section 30-102-17.

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, dug with the County backhoe on centerline centerline of N-S-E-W roads for bituminous overlay project SAP 50-604-18. Dug a 5' x 14' x 6' deep hole and uncovered a 5/8" diameter iron 0.5' deep over a harrison cast iron monument 2 feet below road surface over a 2" square x 14" long wood stake. Continued digging and found no further evidence of the concrete monument noted in Book "A" or any other perpetuation of the original PLS corner. Placed a cast iron monument at the same location of the monument found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 30, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-9-91 (DATE) found a 3/4"Øx30" long rebar with a 2"sq. wood post on West side of iron in a nest of 5 small stones 3' deep in old road grade.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-9-91 (DATE) placed a cast iron monument on road surface at location of iron found.

SKETCH OF REFERENCE TIES

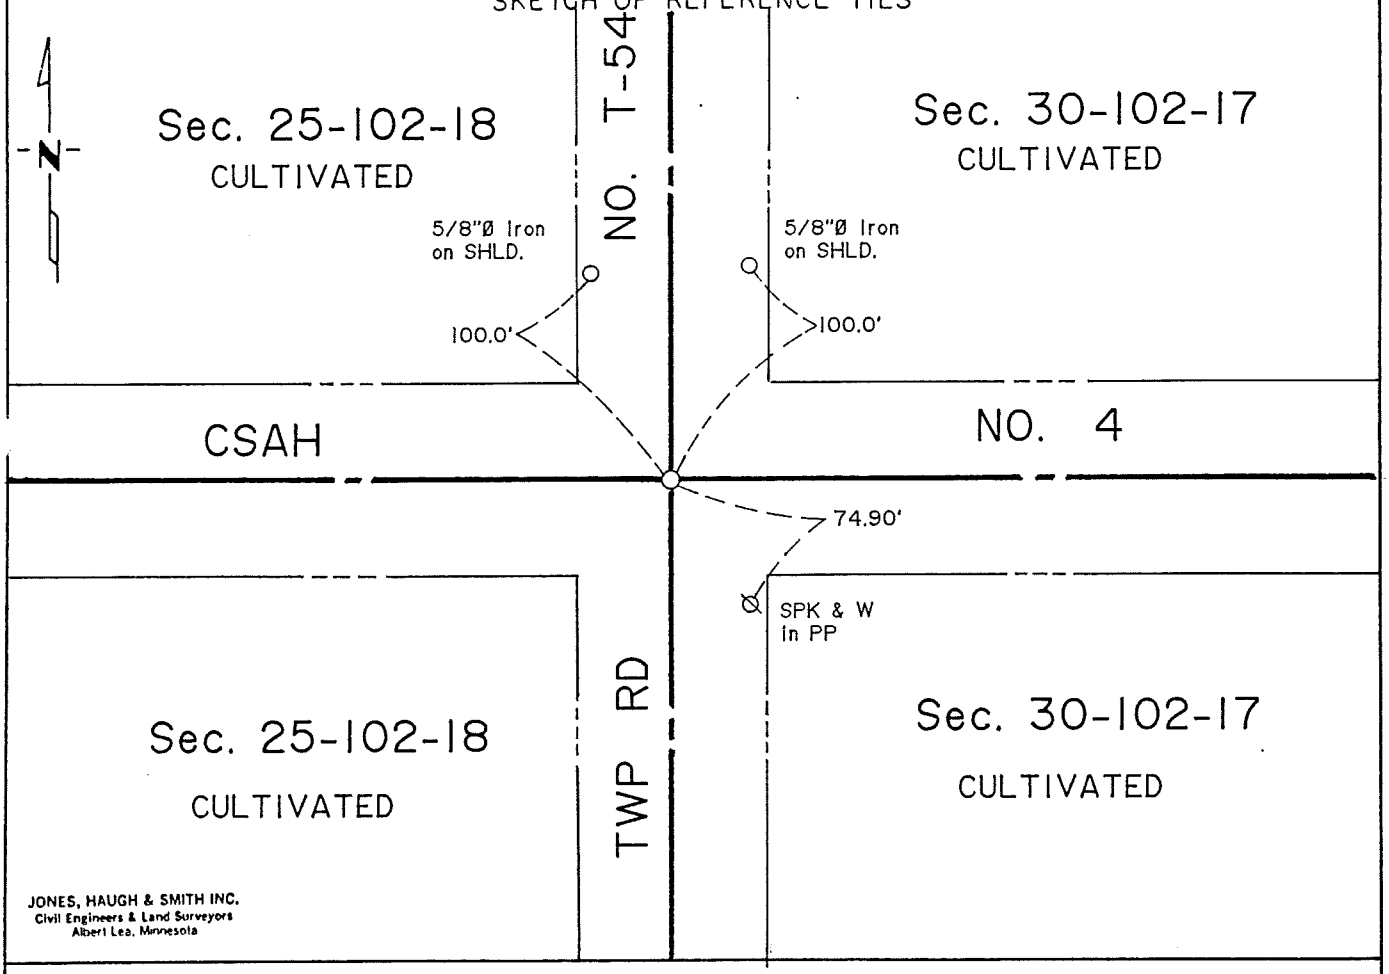

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-16-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 30-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

12" Burr Oak S 1° E 46 links (30.36 ft)
10" Burr Oak N 75° W 14 links (9.24 ft)

The following were contacted for section information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner:

1888 Clausen, Mower County Surveyor from 1880-1892, field notes show government post inplace and chaining notes are given.

1930 Book "A" in the Mower County Engineering Office shows a stone inplace at Sta. 53+10.5. The following ties were taken:

55.6' SW to blaze in 3rd fence post
31.3' SE to "X" in West end concrete headwall
57.0' NE to brace pole
59.1' NW to highline pole

1972 Jones, Haugh & Smith Inc crew placed a 5/8" diameter iron on centerline centerline of N-S-E-W roads and the following ties were taken:

Concrete nail & W FCP NE 63.85'
Concrete nail & W PP NW 63.9'
Concrete nail & W PP SE 47.0'
Concrete nail & W PP SW 45.05'

1973 Book "A" shows inplace a 5/8" diameter rod 0.2' deep on centerline centerline of N-S-E-W roads. Ties were checked and remain intact.

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, dug with the County backhoe on centerline centerline of N-S-E-W roads for bituminous overlay project SAP 50-604-18. Dug a 5' x 12' x 6' deep hole and uncovered a 3/4" diameter x 30" long rebar with a 2" square wood post on the West side of iron in a nest of 5 small stones 3' deep in old road grade. Continued digging and found no further evidence of PLS corner or a perpetuation thereof. Placed a cast iron monument on road surface at the same location of the iron found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 30, Township 102N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER

At the corner location shown on the sketch:


☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-30-92 (DATE) placed a conc. nail ℄ w in bridge deck

REVISED FROM CERTIFICATE DATED 12-12-88

SKETCH OF REFERENCE TIES

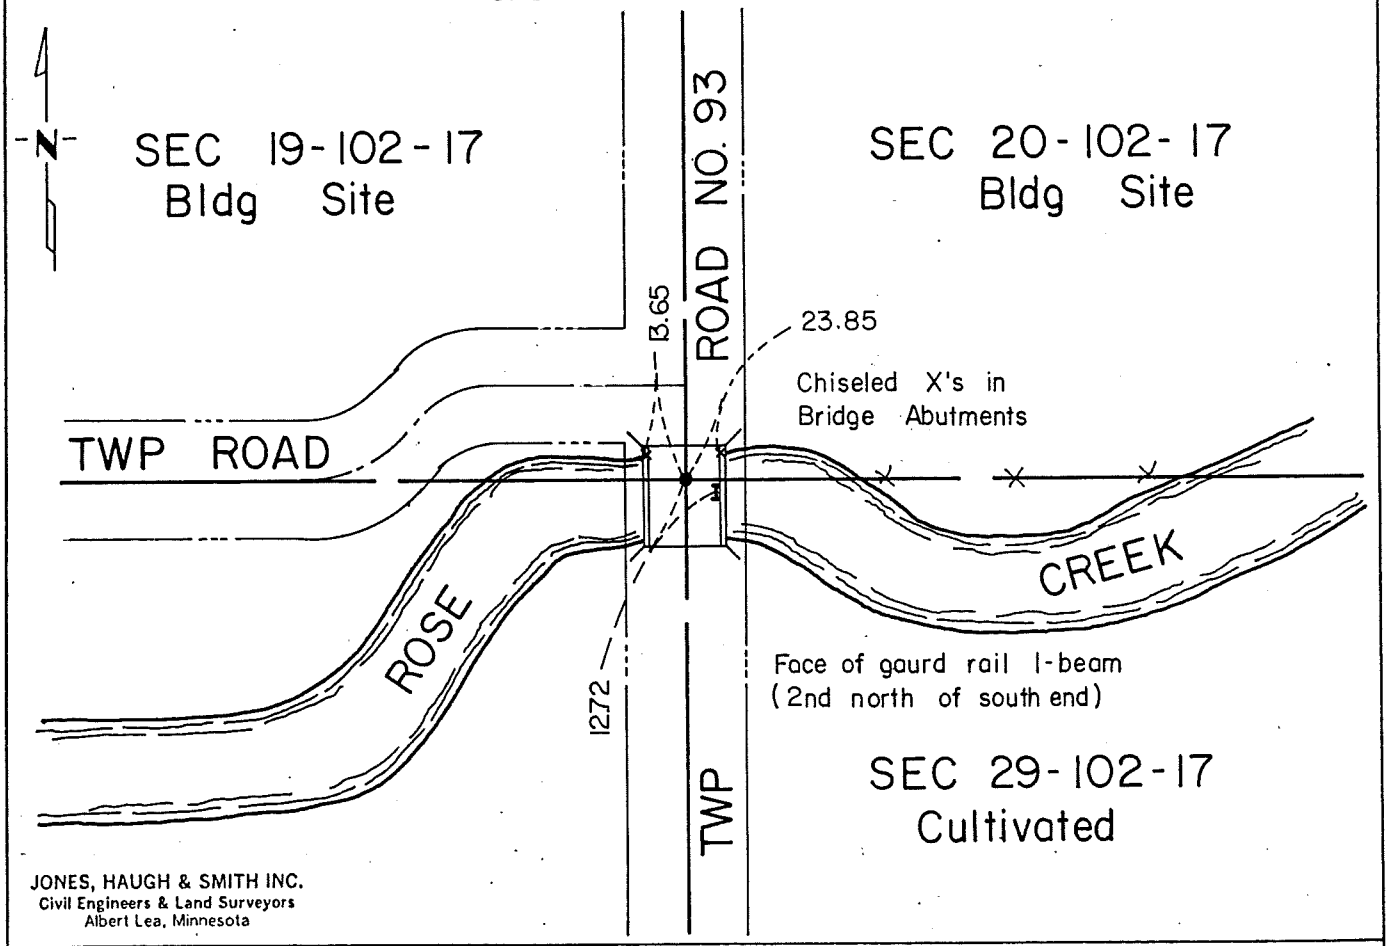

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 5-20-92 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Section 30-102-17

This corner was originally established by Deputy Surveyor Wm I. Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post and the following bearing trees were marked:

Burr Oak	N 15 1/2° W	238 links
Burr Oak	N 55° E	174 links

The following were contacted for section corner information:
Mower County Highway Dept

1985 Jones, Haugh & Smith Inc crew found no evidence of public land survey corner or a perpetuation thereof. Appears corner was destroyed by rechanneling of creek and bridge construction. Therefore established position of corner using obliterated methods.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 30, Township 102N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-7-85 (DATE) found a NO EVIDENCE OF CORNER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 8-7-85 (DATE) placed a conc. nail & W. in bridge deck

SKETCH OF REFERENCE TIES

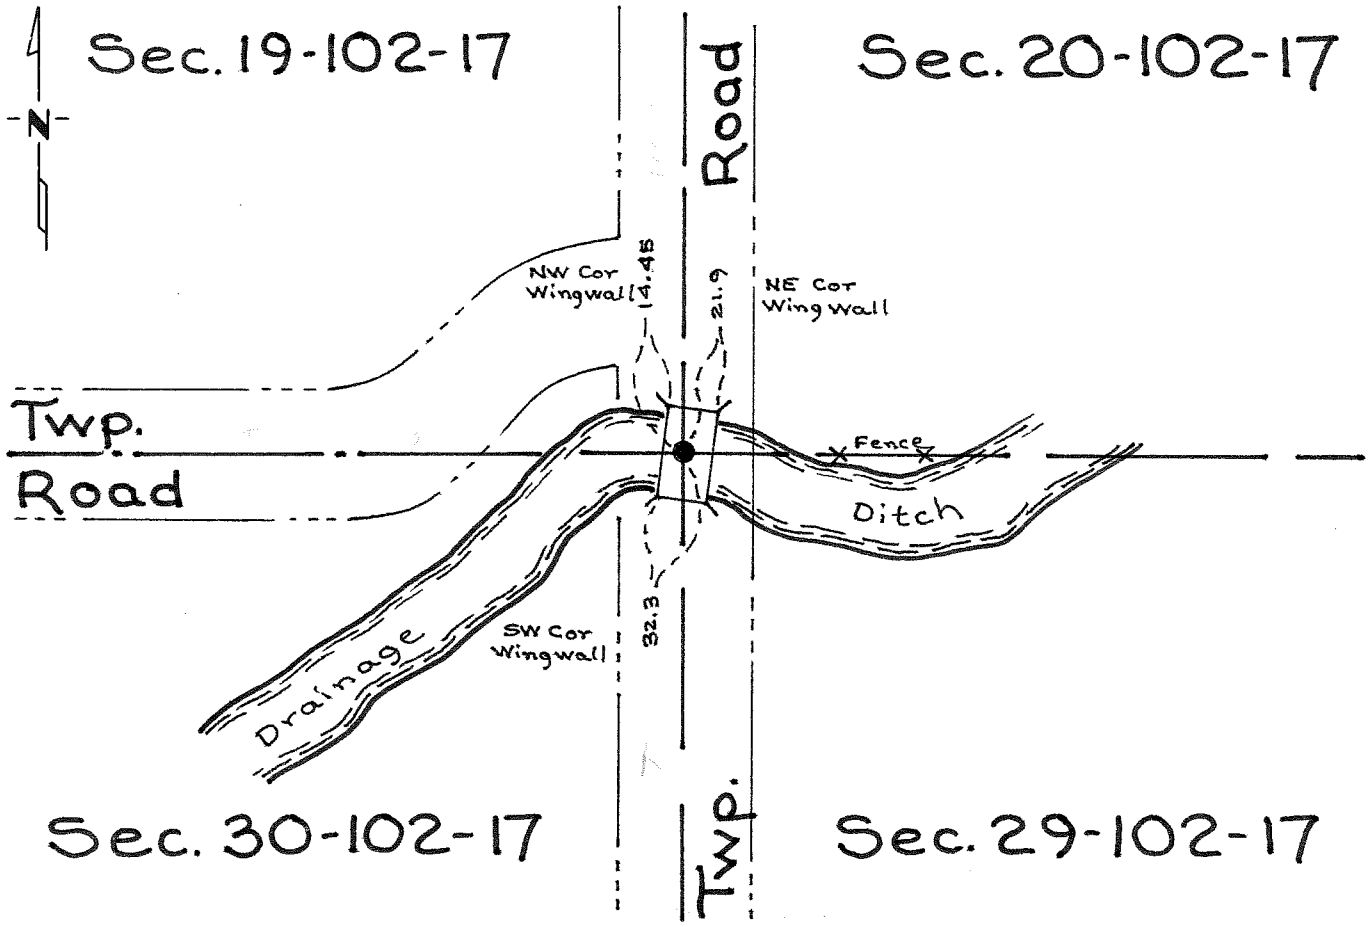

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-12-88

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
NE corner Section 30-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the US General Land Office in 1854. The government notes show this corner was marked with a wood post and the following bearing trees were marked:

9" Burr Oak	N $15\frac{1}{2}^{o}$ W	238 Links
7" Burr Oak	N 55^{o} E	174 Links

The following were contacted for section corner information:

Mower County Highway Department

1985 Jones, Haugh & Smith crew found no evidence of public land survey corner or a perpetuation of. Appears corner was destroyed by rechanneling of creek and bridge construction. Therefore established position of corner using obliterated methods.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith

"I" TIE BOOK p.54 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 30, Township 102N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 8-7-85 (DATE) placed a concrete nail & washer in bridge deck

SKETCH OF REFERENCE TIES

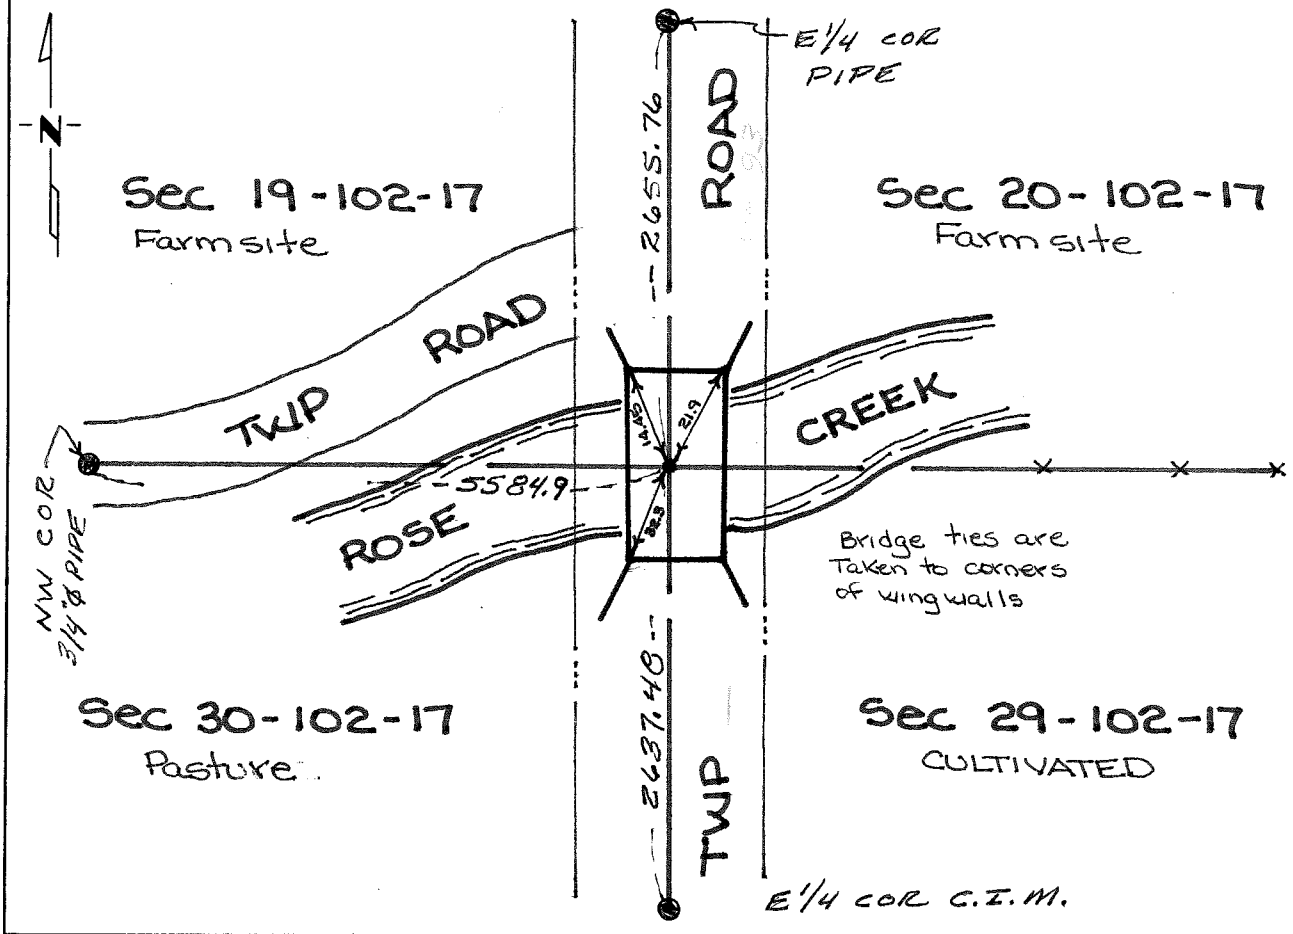

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John H. Schutt III
SIGNATURE

10-10-95
DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Section 30-102-17

1854 William I. Anderson, Deputy Surveyor, set wood post during public land survey.

1985 Jones, Haugh & Smith Inc survey crew found no evidence of original public land survey corner or bearing trees. Therefore established the corner using obliterated methods, as follows:

Used centerline of bridge at northeast corner to control east-west position since it fit centerline of roads to north and south.

Measured north from E¼ corner Section 30 to existing fence line west at northeast corner of the SE¼ NE¼ Section 30 and found a distance of 1318.74 feet. Doubled this distance and set temporary point on centerline of bridge for northeast corner. Then measured north from temporary point to field division west at northeast corner of the SE¼ SE¼ Section 19-102-17 and found distance of 1328 feet more or less. Continued measuring north to E¼ corner Section 19, and found 2655.76 feet.

Found remains of old fence line east on south bank of creek, which fits temporary point and extended centerline of township road to west and found that it checked with temporary point.

Found that temporary point fits existing fence lines, field division and road centerlines. Therefore we set concrete nail and washer at temporary point and took ties as shown; and accepted this location as best of location of the original public land survey corner using existing extrinsic evidence.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 35, Township 102N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/20/1995 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/20/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

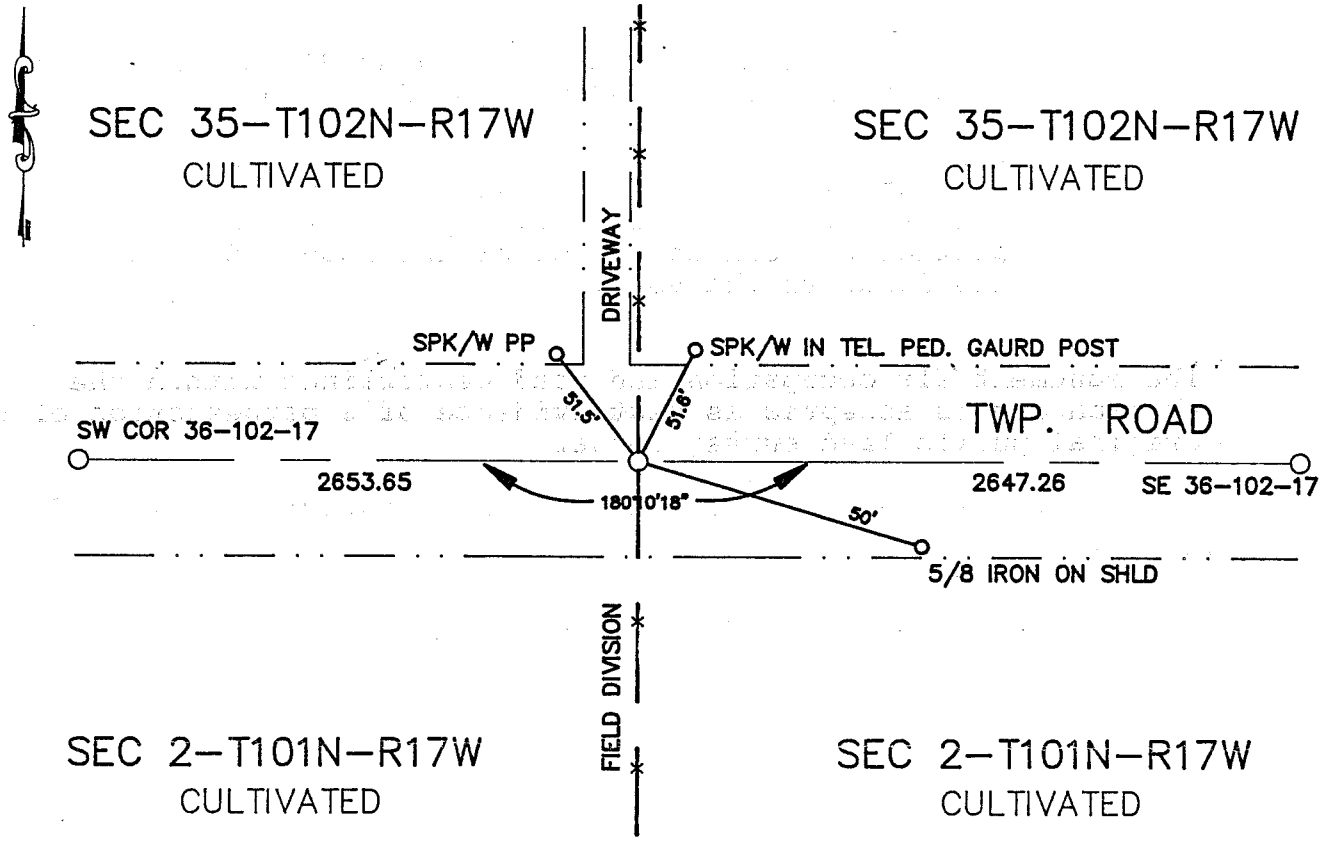

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] 1-26-96
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 29 day of Jan A.D., 1996

COUNTY RECORDER Charles Enger
By Susan M. Davis, Deputy
DOCUMENT NO. 44201

M.H.D. FORM NO. 2105 BOOK 90 PAGE 107

Book 90 Misc Page 107

S 1/4 Cor SEC 35-102-17

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road E-W and in line with field divisions North and South. Dug to virgin soil and found no evidence of original PLS corner. Placed a cast iron on the CL of road and in line with field divisions North and South.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 35, Township 102N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/20/1995 (DATE) found a 5/8" IRON PIN OVER WOOD HUB 1'x4"x1/2' METAL OBJECT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/20/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

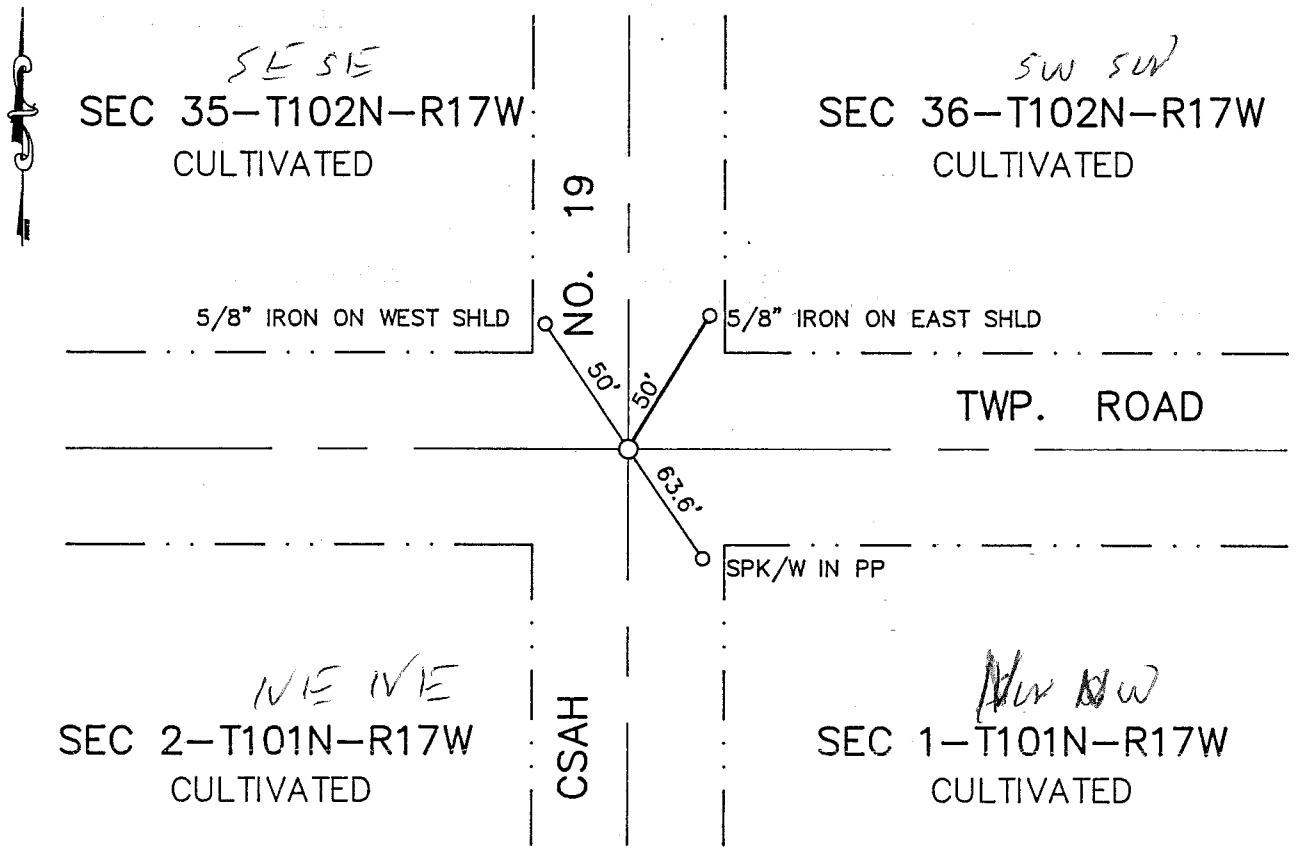

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-5-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 8 day of Jan A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 441814

M.H.D. FORM NO. 2105 BOOK 90 PAGE 11 Book 90 Misc Pg 11

SE Cor SEC 35-102-17

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1930+- Mower Co. road plans show a monument in this location.

1977 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the intersection of township roads. Found a 2x2' wooden hub on the North side of a 1'x4"x1/2" metal object. Placed a 5/8" iron on the South side of the wood hub.

1995 Set a cast iron monument over 5/8" iron found.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.