I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

Steven J. Thompson 4-16-25
Steven J. Thompson Date

Registration No. 22705

☒ Land Surveyor, ☐ Professional Engineer
☐ County Surveyor, ☐ County Engineer

MOWER COUNTY COORDINATES
NAD 83 (96) HARN
Northing=164768.33 Latitude=N43°40'25.991156"
Easting=746169.21 Longitude=W93°01'10.632870"

A687722

Office of the County Recorder
Mower County, Minnesota

I HEREBY CERTIFY THE WITHIN INSTRUMENT WAS FILED, AND/OR RECORDED ON 5/19/2025 9:11 AM

PACKAGE: 108322 **REC FEE: $0.00**

Sara Madison, Mower County Recorder

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 5, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 02/26/2025 (DATE) found a CAST IRON MONUMENT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

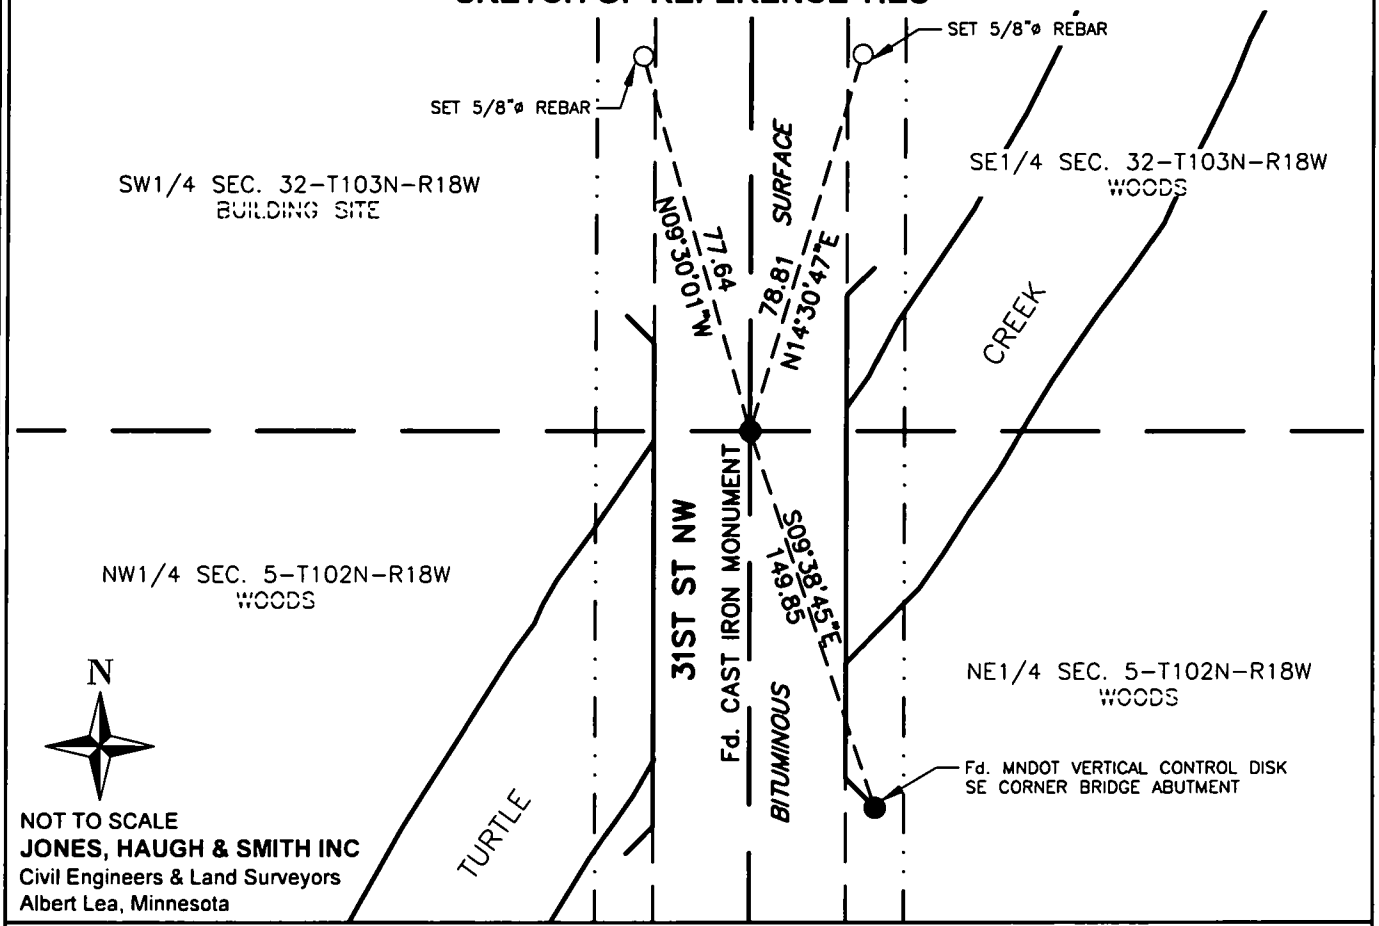

NOT TO SCALE
JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

STATEMENT OF EVIDENCE

N1/4 Corner Section 5-T102N-R18W

This corner was established by Deputy Surveyor J.B. Reyman in May-July, 1854. The government notes show a wood post was set and mound with trench and pits per instructions.

The following were contacted for section corner information.

Freeborn County Highway Dept.
Freeborn County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, set this corner by extending the line between the center of section 5-102-18 and the S1/4 corner of section 5-102-18 to intersect a straight line between the NW corner and the NE corner of section 5. This location fits existing surveys in the N1/2 of section 5 and plats of OLS in the S1/2 of section 32. Set a cast iron monument in the north end of bridge deck.

This monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

February 26, 2025: Jones, Haugh, & Smith crew recovered a Cast Iron Monument that was set in 1995. Set new ties and left Cast Iron Monument in place.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.


MONUMENT
CORNER


EAST


NORTH

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 32, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/27/1995 (DATE) found a MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11/27/195 (DATE) placed a –

SKETCH OF REFERENCE TIES

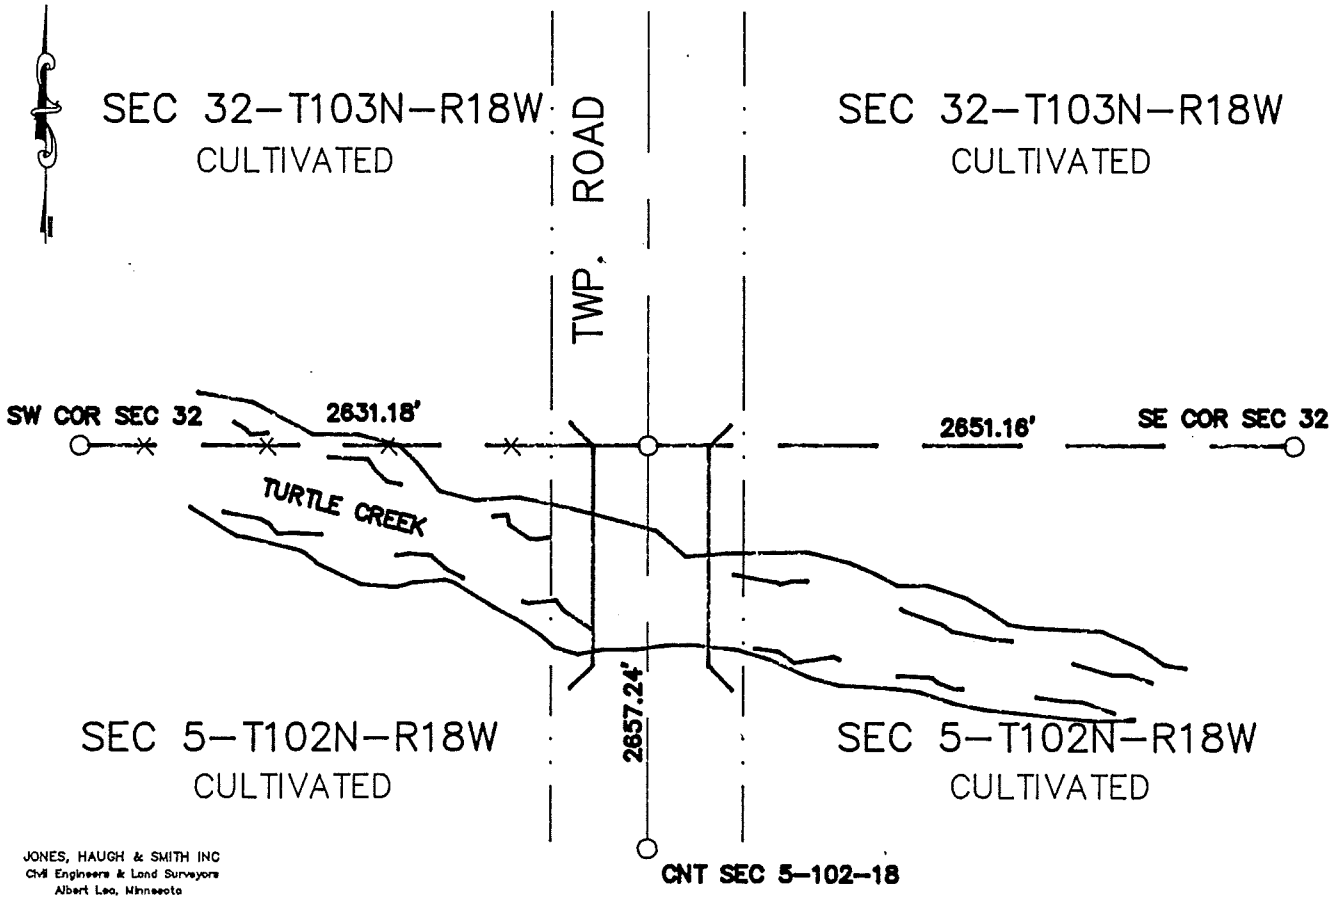

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 94 PAGE 132

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-30-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 4 day of Feb A.D., 1997

COUNTY RECORDER Charles Enger
By Susan M. Davis, Deputy
DOCUMENT NO. 450947

M.H.D. FORM NO. 2105

Book 94 Misc Page 132

S 1/4 Cor SEC 32-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, set this corner by extending the line between the center of section 5-102-18 and the S 1/4 corner of section 5-102-18 to intersect a straight line between the NW corner and the NE corner of section 5. This location fits existing surveys in the N 1/2 of section 5 and plats of OLS in the S 1/2 of section 32. Set a cast iron monument in the north end of bridge deck.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.