I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

Steven J. Thompson — Date: 4-16-25

Registration No. 22705

☒ Land Surveyor, ☐ Professional Engineer
☐ County Surveyor, ☐ County Engineer

MOWER COUNTY COORDINATES
NAD 83 (96) HARN
Northing=164814.21 Latitude=N43°40'26.148976"
Easting=748820.39 Longitude=W93°00'34.557021"

A687723

Office of the County Recorder
Mower County, Minnesota

I HEREBY CERTIFY THE WITHIN INSTRUMENT WAS FILED, AND/OR RECORDED ON 5/19/2025 9:17 AM

PACKAGE: 108323 **REC FEE: $0.00**

Sara Madison, Mower County Recorder

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section **5**, Township **102N** Range **18W**, **5th** P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On **02/27/2025** (DATE) found a **CAST IRON MONUMENT**

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

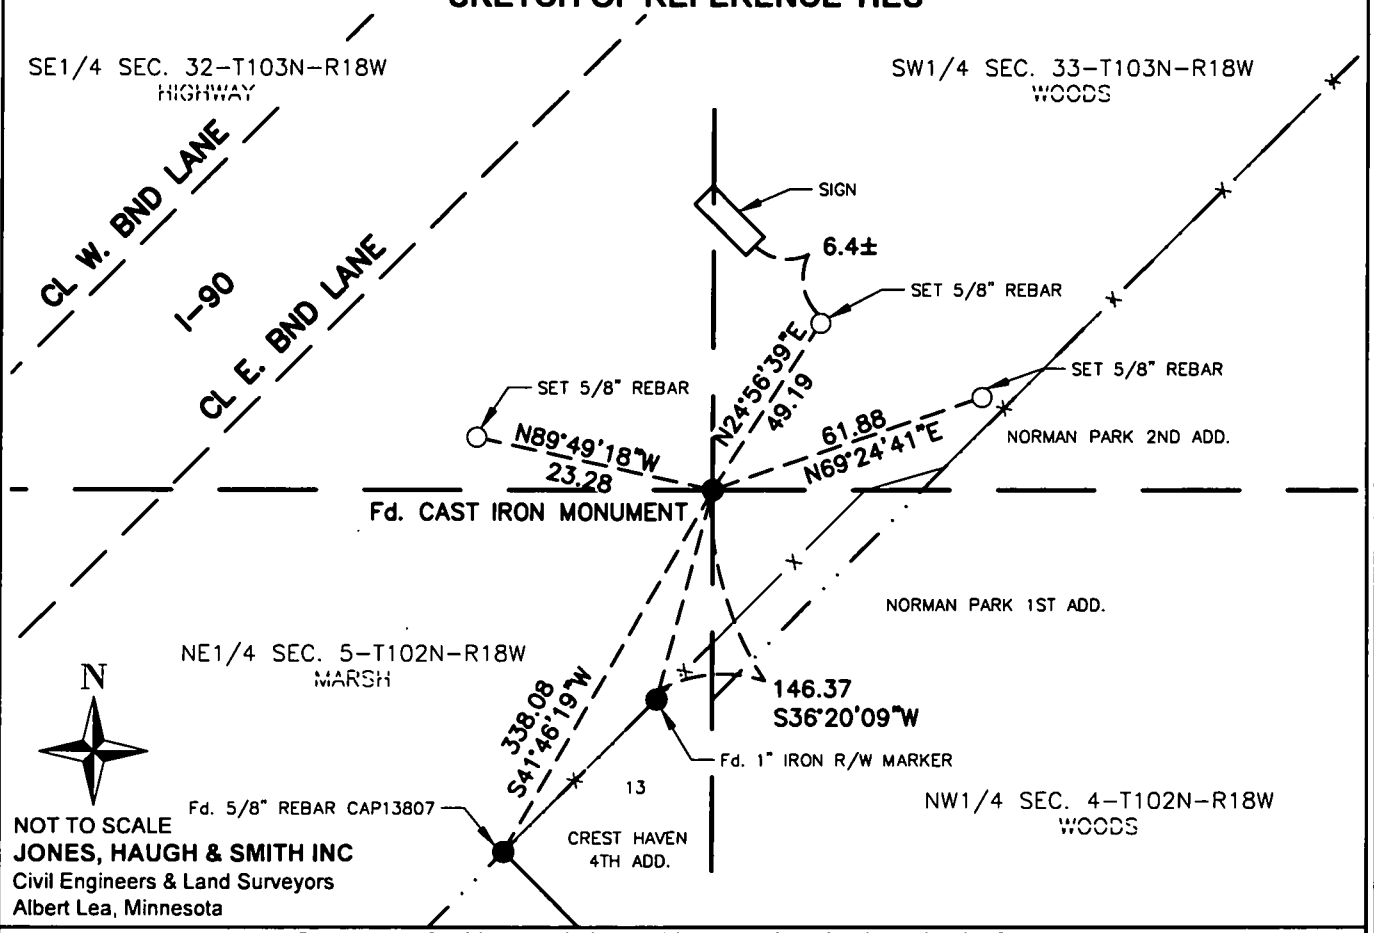

NOT TO SCALE

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

STATEMENT OF EVIDENCE

NE Corner Section 5-T102N-R18W

This corner was established by Deputy Surveyor J.B. Reyman in May-July, 1854. The government notes show a wood post was set and mound with trench and pits per instructions.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained form the above mention offices.

1950± Plat of Norman Park 1st and Norman Park 2nd addition by surveyor Milner show this corner.

1960± TH #90 R/W map show a location for this corner.

1967 Harold Haugh reset iron monument using Milner's information from the existing subdivision plats and MNDOT TH #90 R/W maps.

1988 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located corner and set a cast iron head on 5/8" iron monument found.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

February 27, 2025: Jones, Haugh, & Smith crew recovered a Cast Iron Monument that was set in 1988. Set new ties and left Cast Iron Monument in place.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.


MONUMENT


EAST


NORTH
QDOBA

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 32, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/07/1988 (DATE) found a 5/8" ø IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/07/1988 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

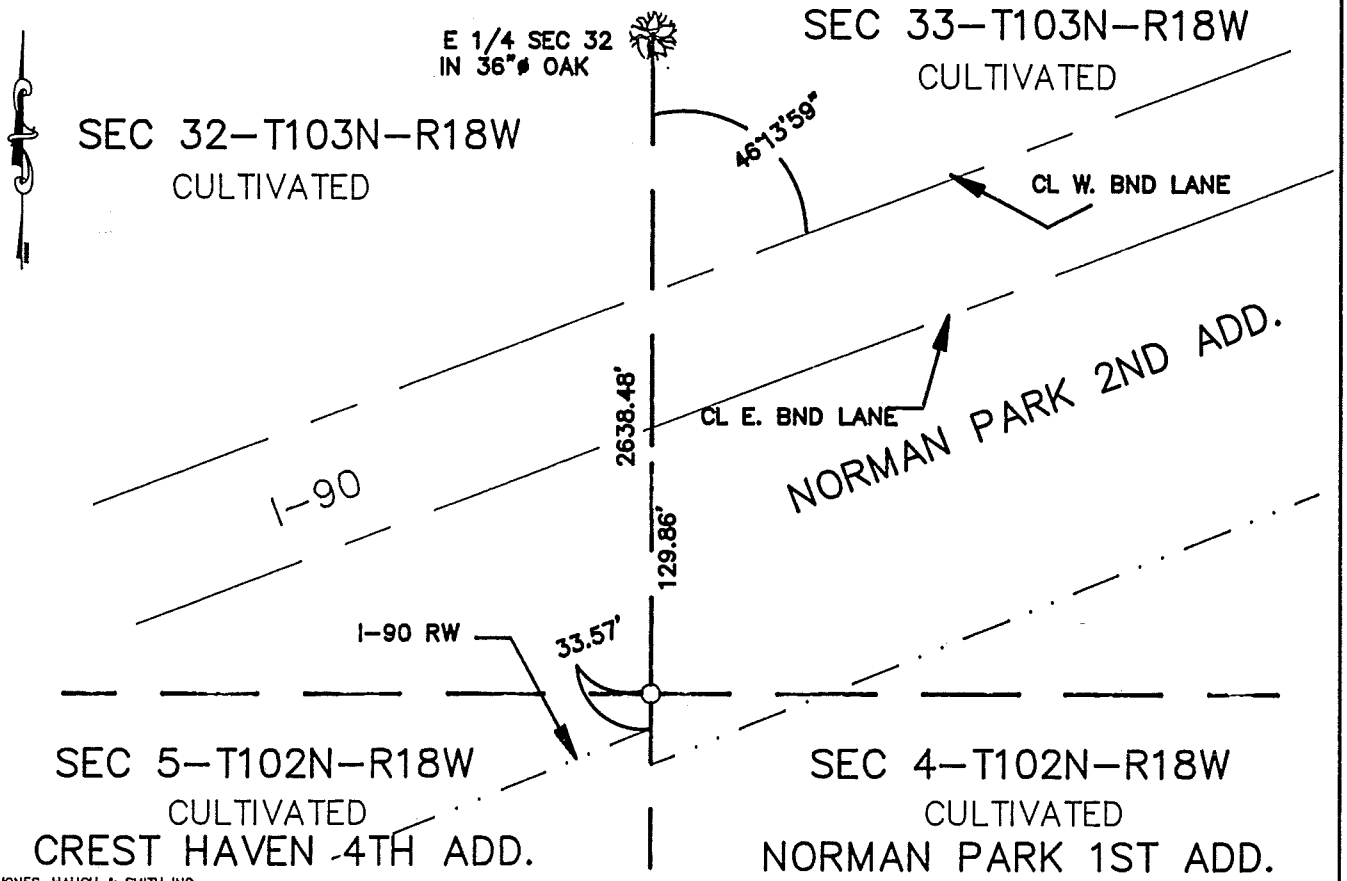

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 94 PAGE 126

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 1-30-97 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 4 day of Feb A.D., 1997

COUNTY RECORDER Charles Evgen

By Susan M Davis, Deputy

DOCUMENT NO. 450944

M.H.D. FORM NO. 2105

Book 94 Misc Page 126

SE Cor SEC 32-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1950+- Plat of Norman Park 1st and Norman Park 2nd addition by surveyor Milner show this corner.

1960+- TH #90 R/W map show a location for this corner.

1967 Harold Haugh reset iron monument using Milner's information from the existing subdivision plats and MNDOT TH #90 R/W map.

1988 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located corner and set a cast iron head on 5/8" iron monument found.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.