I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

Steven J. Thompson 4-16-25
Steven J. Thompson Date

Registration No. 22705

☒ Land Surveyor, ☐ Professional Engineer
☐ County Surveyor, ☐ County Engineer

MOWER COUNTY COORDINATES
NAD 83 (96) HARN
Northing=N159497.67 Latitude=N043°39'33.644369"
Easting=E748863.39 Longitude=W093°00'34.791920"

A687731

Office of the County Recorder
Mower County, Minnesota

I HEREBY CERTIFY THE WITHIN INSTRUMENT WAS FILED, AND/OR RECORDED ON 5/19/2025 9:17 AM

PACKAGE: 108323 REC FEE: $0.00

Sara Madison, Mower County Recorder

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 8, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 2/25/2025 (DATE) found a ALUMINUM MONUMENT IN CONCRETE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

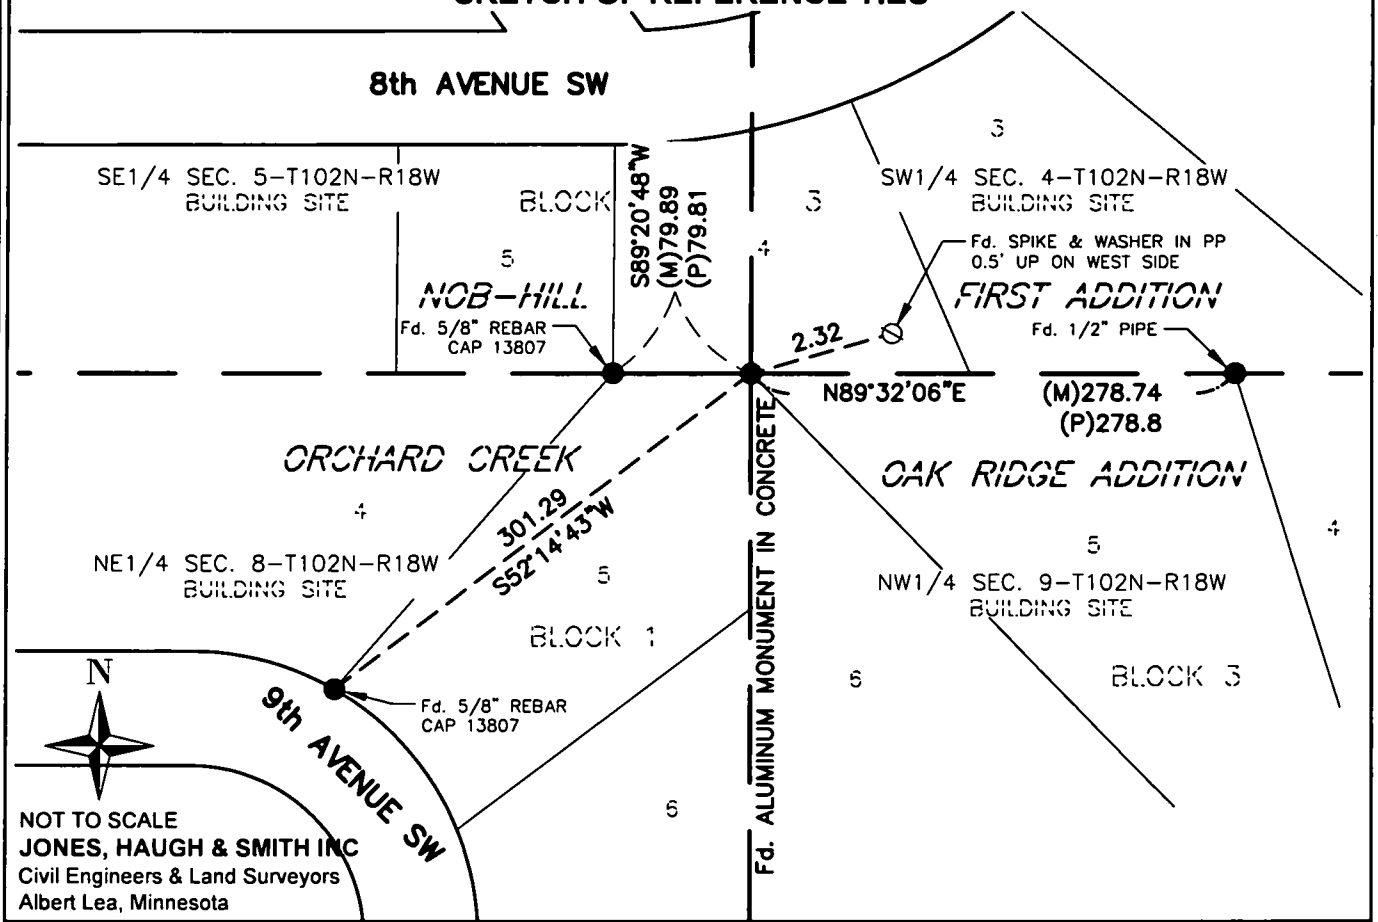

Statement of evidence relative to this corner location is on back of page.

STATEMENT OF EVIDENCE

NE Corner Section 8-T102N-R18W

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in July, 1854. The government notes show a wood post was set with a mound of earth and trench.

August 1, 1947 C.V. Jones, Civil Engineer and Land Surveyor recovered corner while platting Oak Ridge Addition.

November 20, 1956: Corner was further used while platting Nob-Hill First Addition.

July 1996: Jones, Haugh, & Smith crew used the corner while platting Orchard Creek.

February 25, 2025: Jones, Haugh, & Smith crew recovered an aluminum monument in concrete. Checked existing ties and left aluminum monument in concrete in place.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.


MONUMENT
U S D A
T 102N R 18W
S5 S4
S8 S9
1939


EAST


NORTH