I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

1-23-26

Steven J. Thompson — Date

Registration No. 22705

☒ Land Surveyor, ☐ Professional Engineer
☐ County Surveyor, ☐ County Engineer

MOWER COUNTY COORDINATES
NAD 83 (96) HARN
Northing=N154397.43 Latitude=N043°38'41.751542"
Easting=E762168.32 Longitude=W092°57'34.654187"

A692414

Office of the County Recorder
Mower County, Minnesota

I HEREBY CERTIFY THE WITHIN INSTRUMENT WAS FILED, AND/OR RECORDED ON 2/11/2026 9:55 AM

PACKAGE: 112928 **REC FEE: $0.00**

Sara Madison, Mower County Recorder

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 11, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On **11/17/2025** (DATE) found a **NOTHING**

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On **11/17/2025** (DATE) placed a **IRON 22705 IN PLOWING**

SKETCH OF REFERENCE TIES

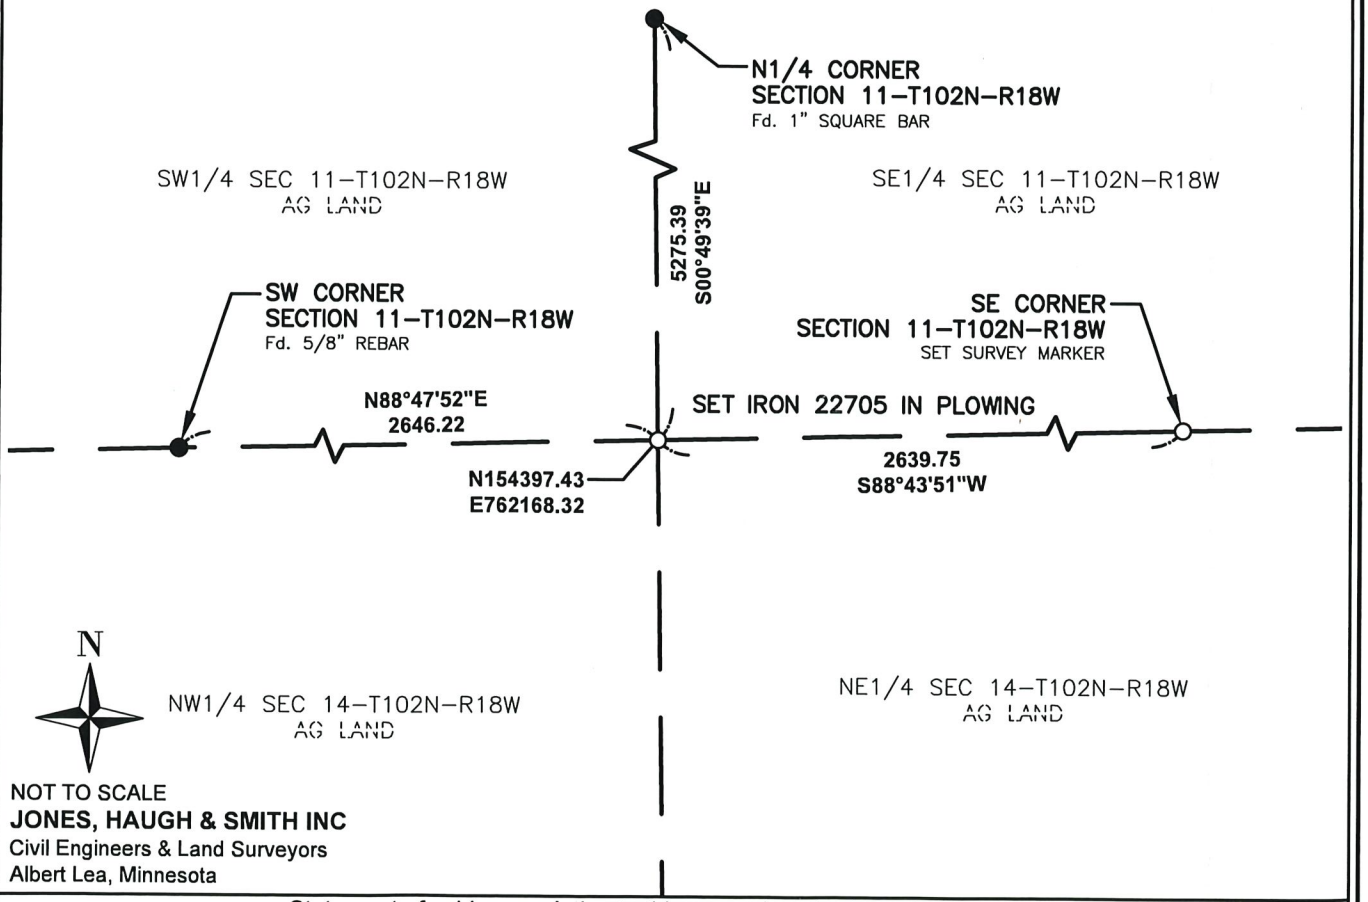

NOT TO SCALE

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

STATEMENT OF EVIDENCE

S1/4 Corner Section 11-T102N-R18W

July 1854: This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in July, 1854. The government notes show a wood post was set with a mound of earth and trench.

August 28, 1937: J.L. Brown found no monumentation while conducting a survey.

August 28, 2000: Jones, Haugh, & Smith crew found no monumentation while conducting a survey.

November 17, 2025 Jones, Haugh & Smith crew searched a 10' radius of corner location and found no monument. Used obliterated methods to recover corner position from existing monumentation and occupation lines and set 5/8"Ø rebar & cap #22705 and made ties.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.


MONUMENT


EAST


NORTH