I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

5-16-25

Steven J. Thompson — Date

Registration No. 22705

☒ Land Surveyor, ☐ Professional Engineer
☐ County Surveyor, ☐ County Engineer

MOWER COUNTY COORDINATES
NAD 83 (96) HARN
Northing=N151436.59 Latitude=N043°38'15.181517"
Easting=E738467.44 Longitude=W093°02'57.383845"

A687742

Office of the County Recorder
Mower County, Minnesota

I HEREBY CERTIFY THE WITHIN INSTRUMENT WAS FILED, AND/OR RECORDED ON 5/19/2025 9:25 AM

PACKAGE: 108324 **REC FEE: $0.00**

Sara Madison, Mower County Recorder

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 18, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 2/27/2025 (DATE) found a CAST IRON MONUMENT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

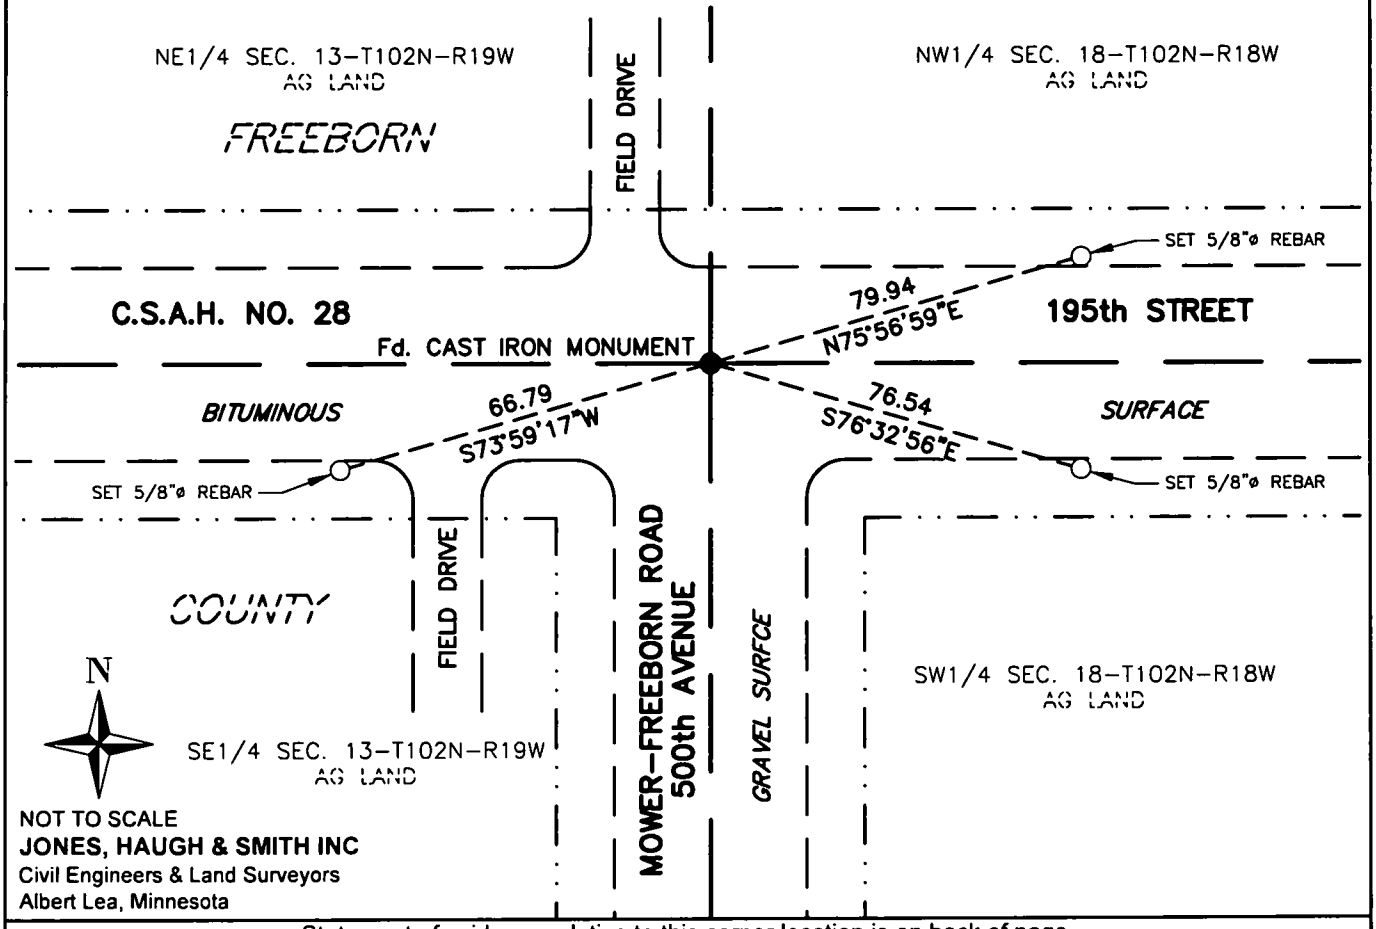

NOT TO SCALE

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

STATEMENT OF EVIDENCE

W1/4 Corner Section 18-T102N-R18W

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1854. The government notes show corner was marked with a wood post and charred stake and a trench with a mound of earth. Cherry seeds were planted east and west of 1/4 section corner.

The following were contacted for section corner information:

Freeborn County Engineering Department

Freeborn County records do not contain location data on this corner.

1988 Jones, Haugh & Smith crew under the direction of John Schulte, Freeborn County Surveyor RLS 13807, dug on the centerline of east-west-south roads and uncovered a 1" diameter pipe one foot deep, and a stone 4' deep with a piece of steel on top, and a wood stake on west side of stone. Placed pipe next to stone found.

Found no further evidence of the public land survey corner. Accepted stone found as best evidence of a perpetuation of the original public land survey corner and set cast iron monument on road surface over stone found.

February 27, 2025: Jones, Haugh, & Smith crew recovered cast iron monument. Left cast iron monument in place and made ties.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.


MONUMENT


EAST


NORTH