I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

4-16-25

Steven J. Thompson — Date

Registration No. 22705

☒ Land Surveyor, ☐ Professional Engineer
☐ County Surveyor, ☐ County Engineer

MOWER COUNTY COORDINATES
NAD 83 (96) HARN

Northing= 146218.19 Latitude=N43°37'23.073461"
Easting= 743787.74 Longitude=W93°01'45.833147"

A687770

Office of the County Recorder
Mower County, Minnesota

I HEREBY CERTIFY THE WITHIN INSTRUMENT WAS FILED, AND/OR RECORDED ON 5/20/2025 8:36 AM

PACKAGE: 108344 **REC FEE: $0.00**

Sara Madison, Mower County Recorder

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section **19**, Township **102N** Range **18W**, **5th** P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On **02/10/2025** (DATE) found a **CAST IRON MONUMENT**

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

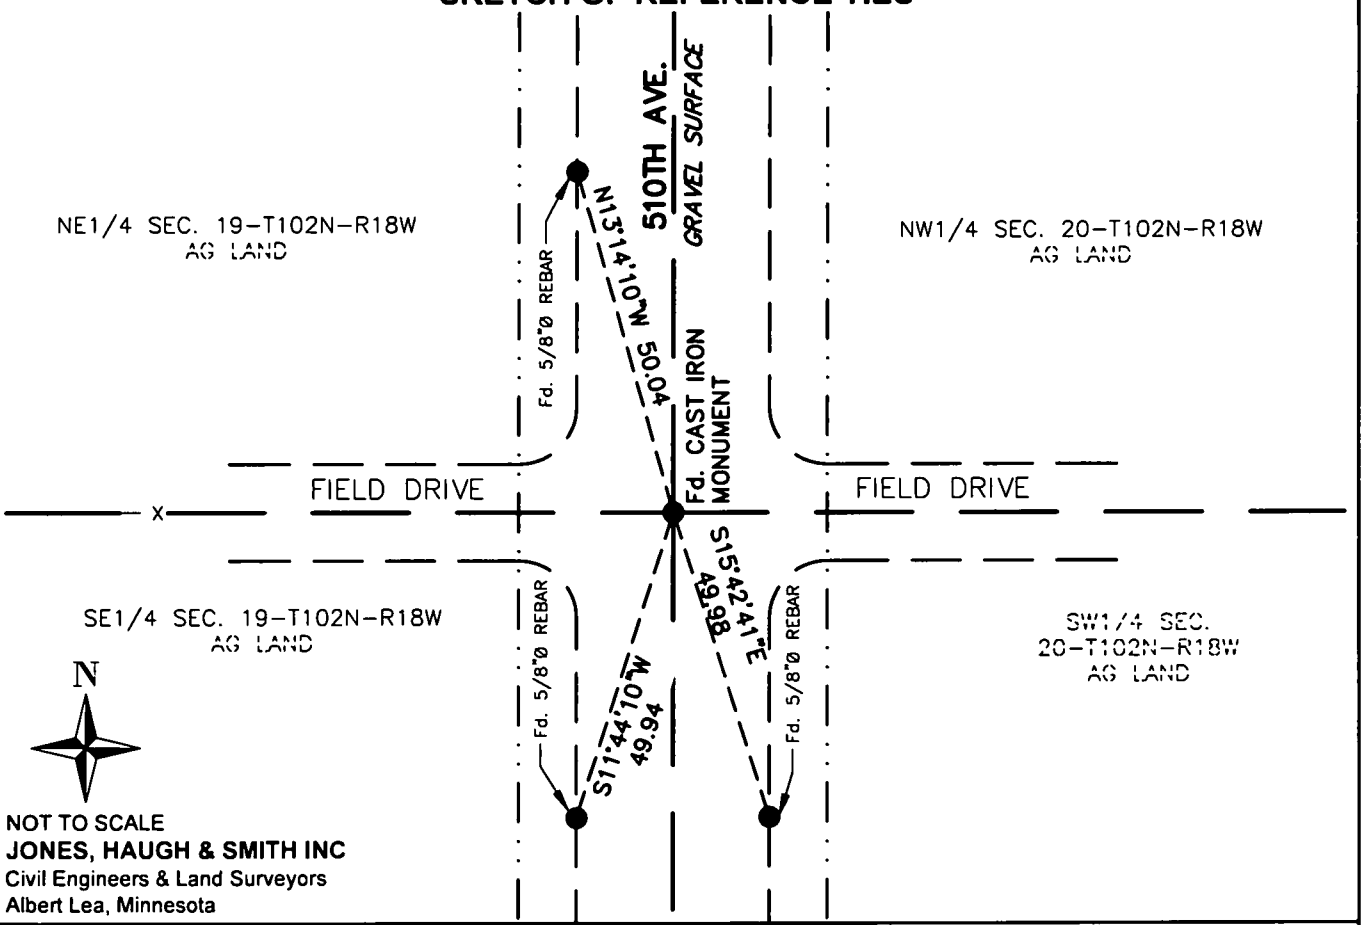

NOT TO SCALE

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

STATEMENT OF EVIDENCE

E1/4 Corner Section 19-T102N-R18W

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in July, 1854. at 2640 feet, set a section corner post, deposited charcoal, raised mound of earth with trench and pits, as per instructions, and planted cherry NE locust SW.

4 June 2003: Jones, Haugh & Smith crew excavated using the county backhoe on the center line of the N-S road and west fence line and found 1.5" x 2.5" iron monument 2' deep. The crew then set a cast iron monument over the top of the iron. The position of the iron fits occupation lines within the section and is accepted as marking the original location of the Public Land Survey Corner.

February 10, 2025: Jones, Haugh, & Smith crew recovered cast iron monument set in June 2003. Checked existing ties and left cast iron monument in place.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.


MONUMENT


EAST


NORTH