I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

Steven J. Thompson — 7-29-25 Date

Registration No. 22705

☒ Land Surveyor, ☐ Professional Engineer
☐ County Surveyor, ☐ County Engineer

MOWER COUNTY COORDINATES
NAD 83 (96) HARN
Northing=N146280.34 Latitude=N043°37'23.100494"
Easting=E749083.87 Longitude=W093°00'33.831481"

A689068

Office of the County Recorder
Mower County, Minnesota

I HEREBY CERTIFY THE WITHIN INSTRUMENT WAS FILED, AND/OR RECORDED ON 8/13/2025 8:00 AM

PACKAGE: 110300 **REC FEE: $0.00**
Sara Madison, Mower County Recorder

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 20, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 4/8/2025 (DATE) found a 5/8" REBAR & YELLOW CAP STAMPED 22705

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

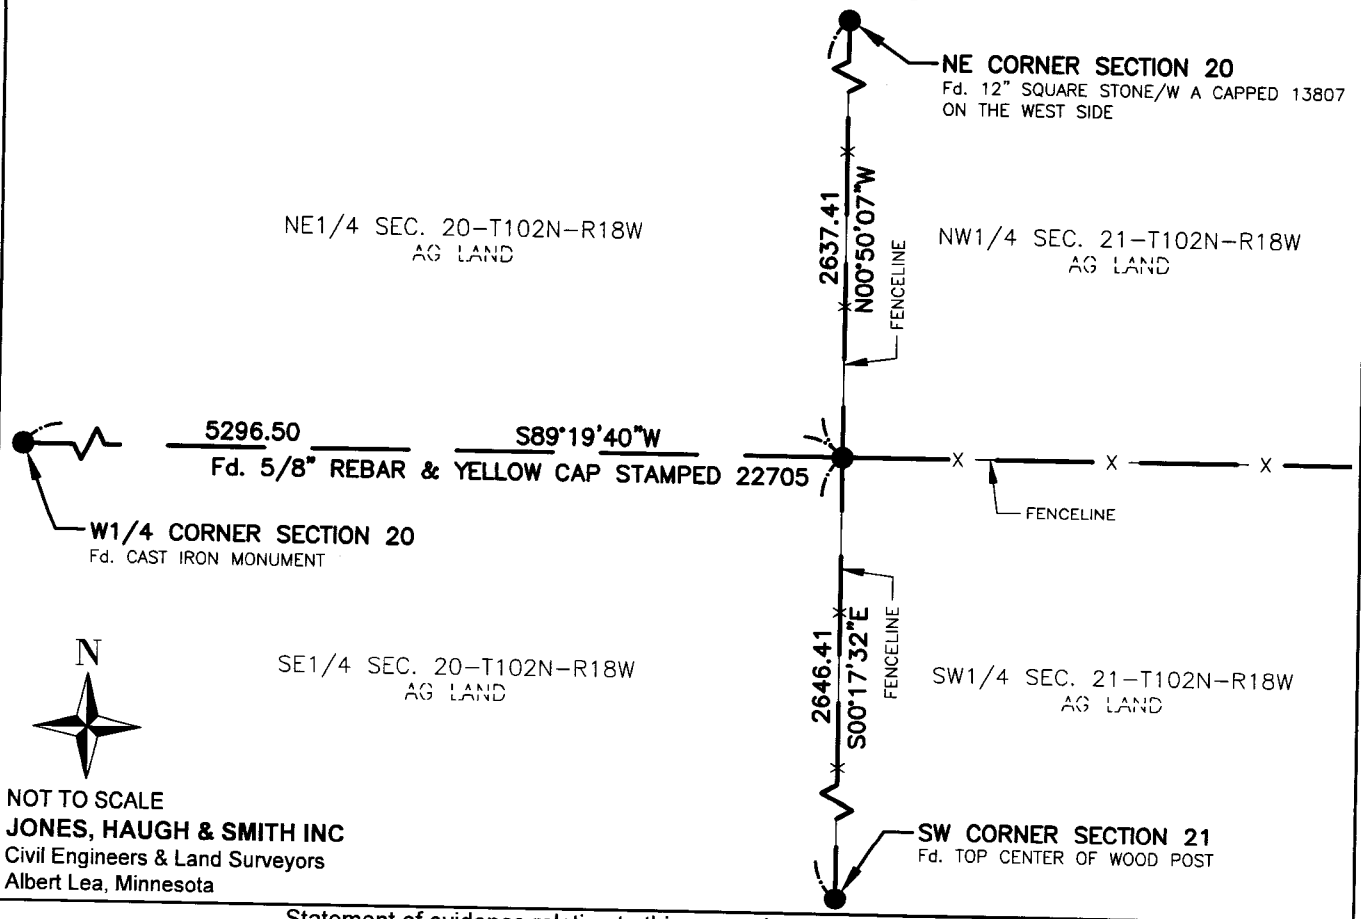

NOT TO SCALE

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

STATEMENT OF EVIDENCE

E1/4 Corner Section 20-T102N-R18W

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. At 2640 feet, set a section corner post, deposited charcoal, raised mound of earth with trench and pits, as per instruction, planted cherry NE Locust SW.

31 July 2000: Jones, Haugh & Smith crew set 5/8"Ø 22705 on NW side of the corner fence post intersection of N-S and E-W fence.

The position of the fence post fits occupation lines within the section and is accepted as marking the original location of the Public Land Survey corner.

April 8, 2025: Jones, Haugh, & Smith crew recovered 5/8" rebar & yellow cap stamped 22705. Checked existing ties and left 5/8" rebar & yellow cap stamped 22705 in place.


MONUMENT


EAST


NORTH