I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

Steven J. Thompson — Date: 7-29-25

Registration No. 22705

☒ Land Surveyor, ☐ Professional Engineer
☐ County Surveyor, ☐ County Engineer

MOWER COUNTY COORDINATES
NAD 83 (96) HARN
Northing=N148917.47 Latitude=N043°37'49.146115"
Easting=E749045.43 Longitude=W093°00'33.947625"

A689069

Office of the County Recorder
Mower County, Minnesota

I HEREBY CERTIFY THE WITHIN INSTRUMENT WAS FILED, AND/OR RECORDED ON 8/13/2025 8:00 AM

PACKAGE: 110300 **REC FEE: $0.00**

Sara Madison, Mower County Recorder

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section **20**, Township **102N** Range **18W**, **5th** P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On **4/8/2025** (DATE) found a **12" SQUARE STONE W/CAPPED 13807 ON WEST SIDE**

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

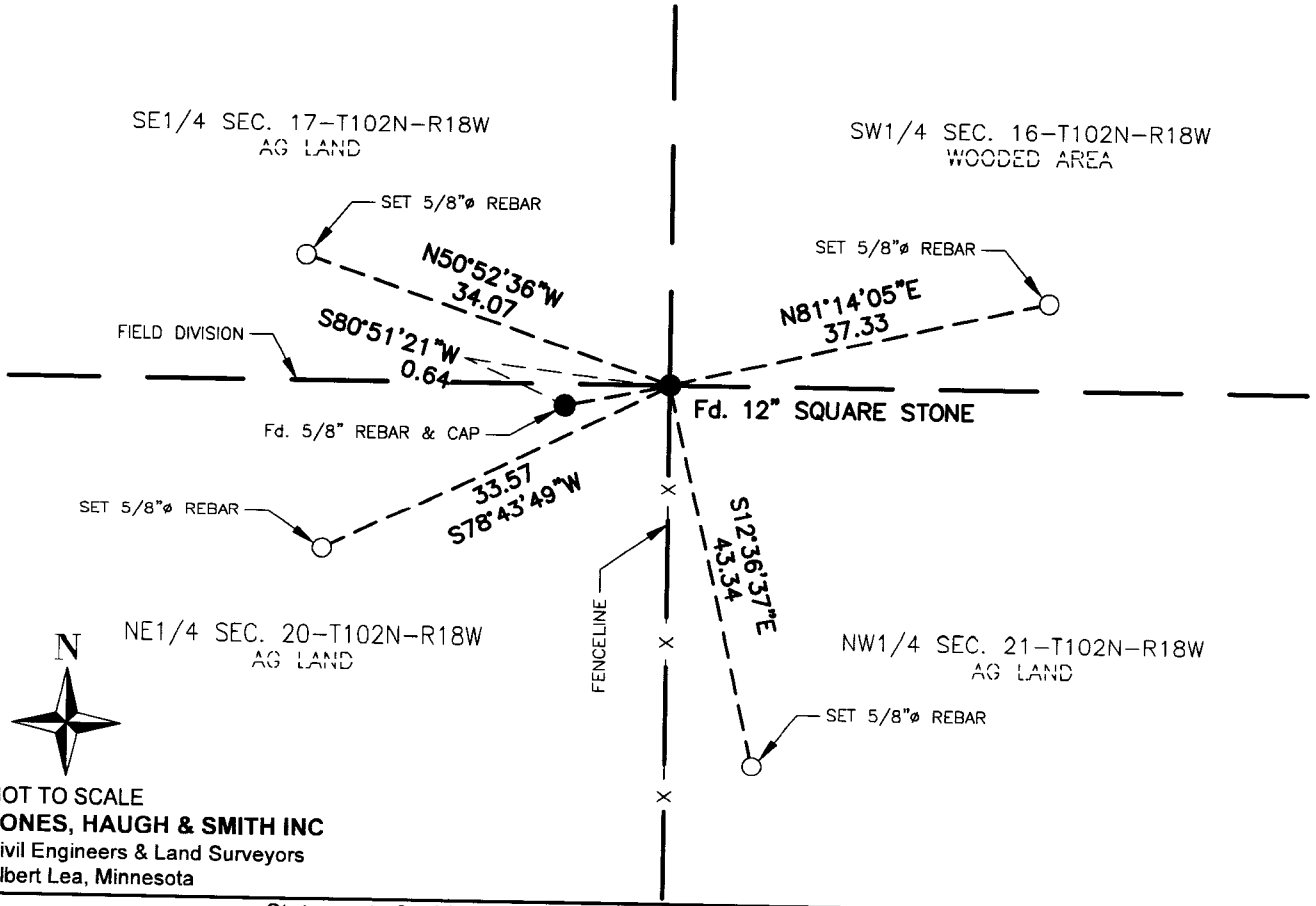

NOT TO SCALE

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

STATEMENT OF EVIDENCE

NE Corner Section 20-T102N-R18W

July 1854: This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in July, 1854. The government notes show a wood post was set with a mound of earth and trench.

April 8, 2025: Jones, Haugh, & Smith crew recovered a 12" square stone with a 5/8" rebar & capped 13807 on the west side of 12" square stone. Similar stones have been found at other corners in Mower County. The stone is accepted as the best evidence of marking the location of the original public land survey corner. Left 12" square stone in place and made ties.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.


MONUMENT


EAST


NORTH