CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 22, Township 102 N, Range 18 W, 3 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 7-11-90 found 5/8" REROD

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 7-11-90 placed 3/4" REROD AND COUNTY CAP

SKETCH OF REFERENCE TIES

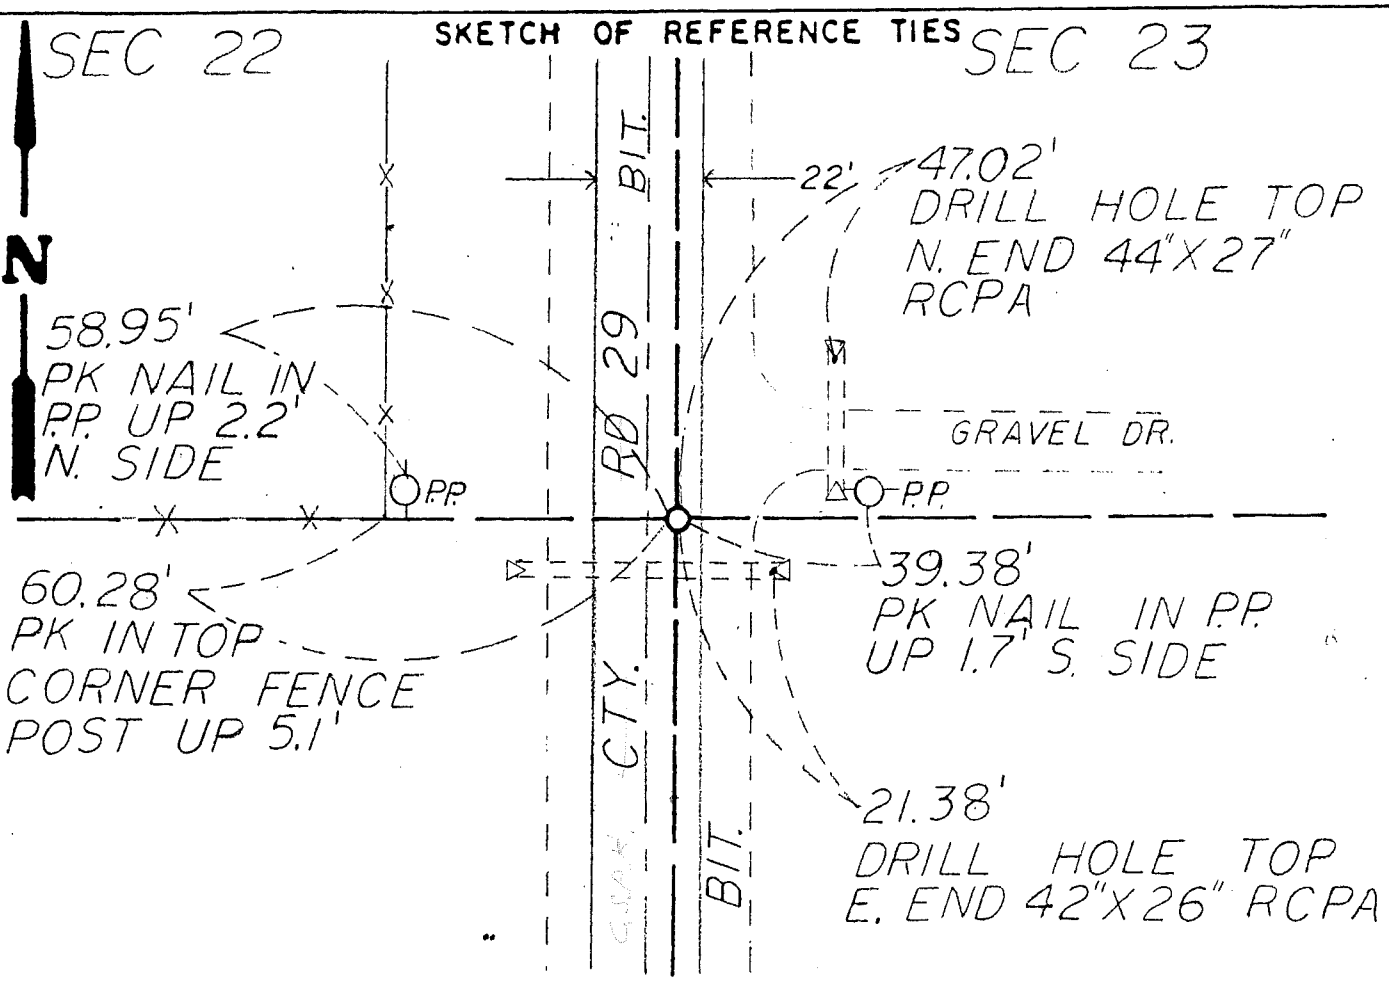

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
7-13-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk•Read•Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

EAST QUARTER CORNER SECTION 22, TOWNSHIP 102 NORTH, RANGE 18 WEST, 5TH P.M.

July, 1854 — William Anderson, Deputy Surveyor, set a post at the corner during the original Public Land Survey.

1962 — County Engineers Road Plans shows a 1/2" diameter iron rod inplace, and later set a PK on the new Road surface after construction.

Oct., 1983 — A survey crew for Hormel Inc. found a 5/8" rod in the Road during a survey for an Experimental Farm.

1989 — Mower County Engineer reconstructed the road and sub cut this area 2 feet. All evidence of the corner in this area was lost.

1989 — Jones Haugh & Smith Inc. placed a rebar and cap at the corner based on the information from their survey records.

June 1990 — Zenk Read Trygstad & Associates excavated with a backhoe 4.5 feet deep 2 feet East to 2 feet West of centerline by 4 feet South to 8 feet North of the fence line East. A stone was found 3.3 feet deep with pieces of a concrete monument on the Southwest side. A 1/2" pipe and cap #11009 was set on the Northwest side of the stone.

An analysis of the record data gives no indication of the origin of the stone. Similar stones have been found throughout the County at other Corner locations. The stone agrees with the occupation lines and is accepted as the location of the original Public Land Survey Corner.