I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

Steven J. Thompson — Date: 7-29-25

Registration No. 22705

☒ Land Surveyor, ☐ Professional Engineer
☐ County Surveyor, ☐ County Engineer

MOWER COUNTY COORDINATES
NAD 83 (96) HARN
Northing=N149044.70 Latitude= N43°37'49.501432"
Easting=E756966.94 Longitude= W92°58'46.235120"

A689072

Office of the County Recorder
Mower County, Minnesota

I HEREBY CERTIFY THE WITHIN INSTRUMENT WAS FILED, AND/OR RECORDED ON 8/13/2025 8:00 AM

PACKAGE: 110300 **REC FEE: $0.00**

Sara Madison, Mower County Recorder

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section **22**, Township **102N** Range **18W**, **5th** P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On **4/16/2025** (DATE) found **NOTHING**

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On **4/16/2025** (DATE) placed a **5/8" REBAR & YELLOW CAP STAMPED 22705**

SKETCH OF REFERENCE TIES

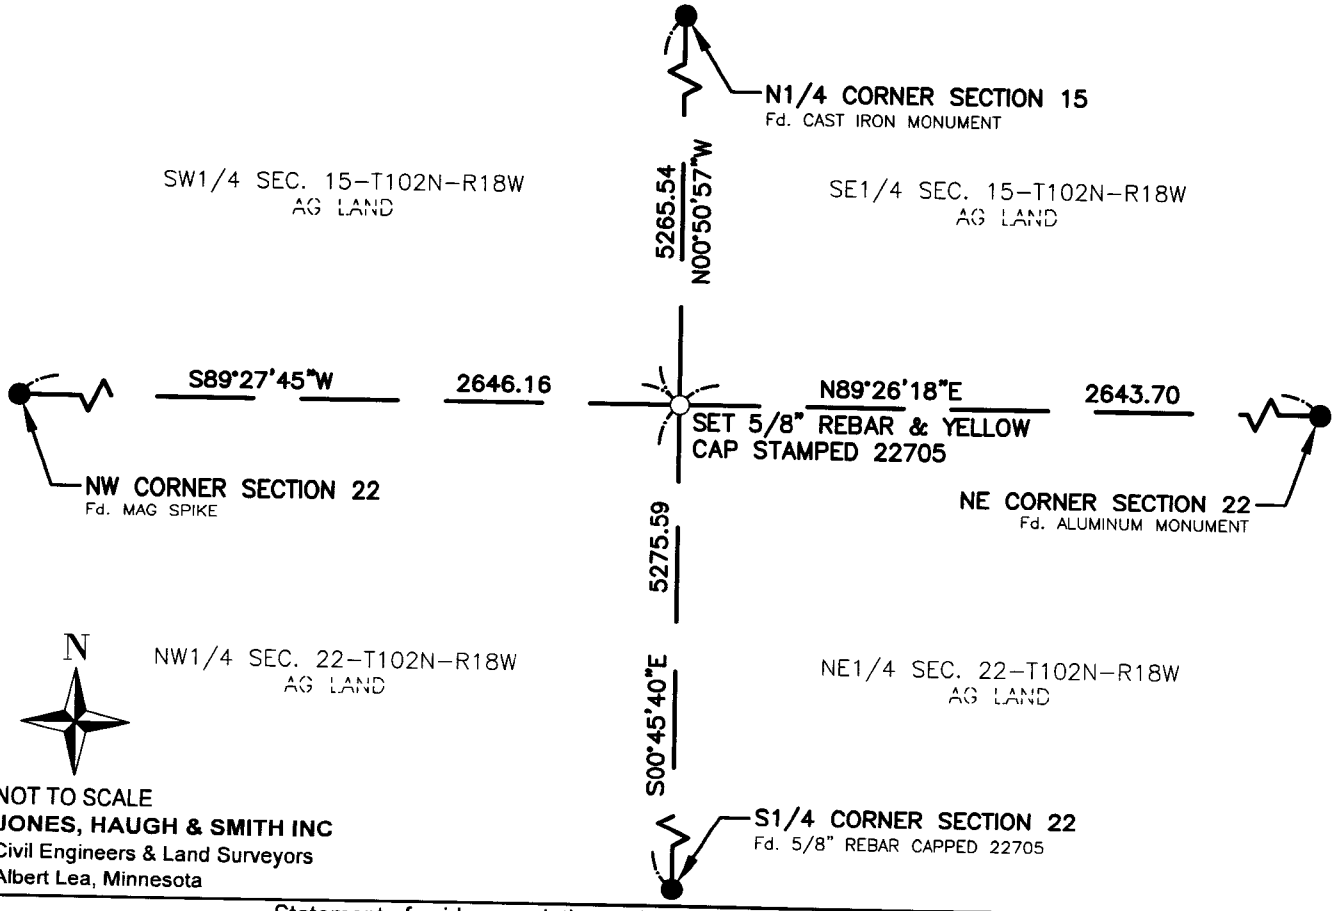

NOT TO SCALE

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

STATEMENT OF EVIDENCE

N1/4 Corner Section 22-T102N-R18W

July 1854: This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in July, 1854. The government notes show a wood post was set with a mound of earth and trench.

1980± Jones, Haugh & Smith recovered corner using obliterated method and placed a 5/8" rebar at corner.

April 16, 2025: Jones, Haugh & Smith crew searched a 10' radius of corner location and found nothing. Set 5/8" rebar & yellow cap stamped 22705 and made ties. Used dimensions from previous surveys to restore corner position by using obliterated methods.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.


MONUMENT


EAST


NORTH