I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

4-16-25

Steven J. Thompson — Date

Registration No. 22705

☒ Land Surveyor, ☐ Professional Engineer
☐ County Surveyor, ☐ County Engineer

MOWER COUNTY COORDINATES
NAD 83 (96) HARN

Northing=146638.23 Latitude=N43°37'24.168189"
Easting=770214.93 Longitude=W92°55'46.533514"

A687775

Office of the County Recorder
Mower County, Minnesota

I HEREBY CERTIFY THE WITHIN INSTRUMENT WAS FILED, AND/OR RECORDED ON 5/20/2025 8:36 AM

PACKAGE: 108344 **REC FEE: $0.00**

Sara Madison, Mower County Recorder

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 24, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 02/13/2025 (DATE) found a 5/8"Ø REBAR

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

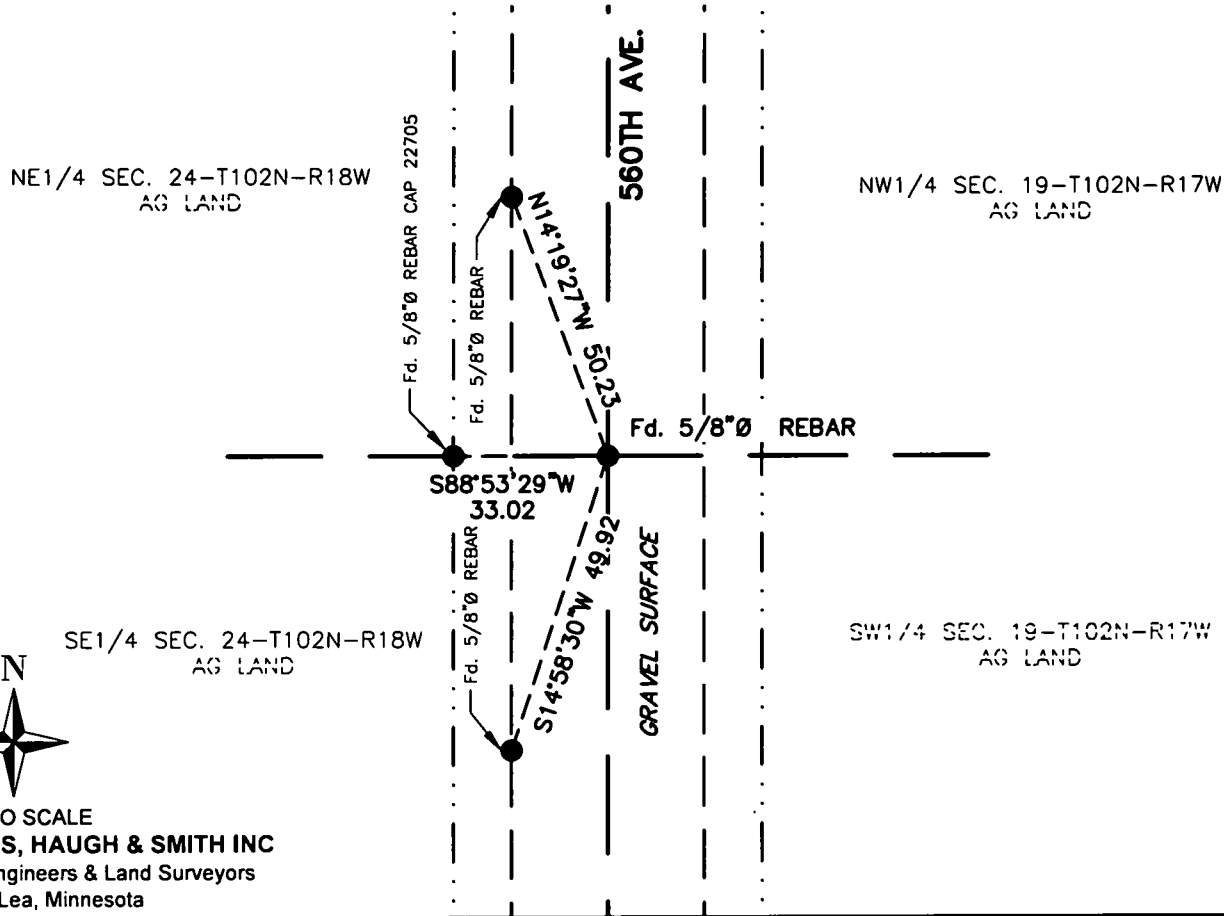

NOT TO SCALE

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

STATEMENT OF EVIDENCE

E1/4 Corner Section 24-T102N-R18W

This corner was established by Deputy Surveyor E.T. Norris in August, 1853. The government notes show a wood post was set and mound with trench and pits per instructions during public land survey.

21 July 2003: Jones, Haugh & Smith crew dug a 15' x 6' trench to virgin soil using the county backhoe and found no evidence of original Public Land Survey corner. Accepted lost position as best evidence of position of original Public Land Survey corner.

February 13, 2025: Jones, Haugh & Smith crew recovered 5/8"Ø rebar set in July 2003. Checked existing ties and left 5/8"Ø rebar in place.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.


MONUMENT


EAST


NORTH