I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

7-29-25

Steven J. Thompson — Date

Registration No. 22705

☒ Land Surveyor, ☐ Professional Engineer
☐ County Surveyor, ☐ County Engineer

MOWER COUNTY COORDINATES
NAD 83 (96) HARN
Northing=N149228.06 Latitude=N043°37'50.064065"
Easting=E767551.58 Longitude=W092°56'22.308266"

A689077

Office of the County Recorder
Mower County, Minnesota

I HEREBY CERTIFY THE WITHIN INSTRUMENT WAS FILED, AND/OR RECORDED ON 8/13/2025 8:11 AM

PACKAGE: 110304 **REC FEE: $0.00**

Sara Madison, Mower County Recorder

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section **24**, Township **102N** Range **18W**, **5th** P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On **4/16/2025** (DATE) found a **5/8" REBAR & YELLOW CAP STAMPED 13807**

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

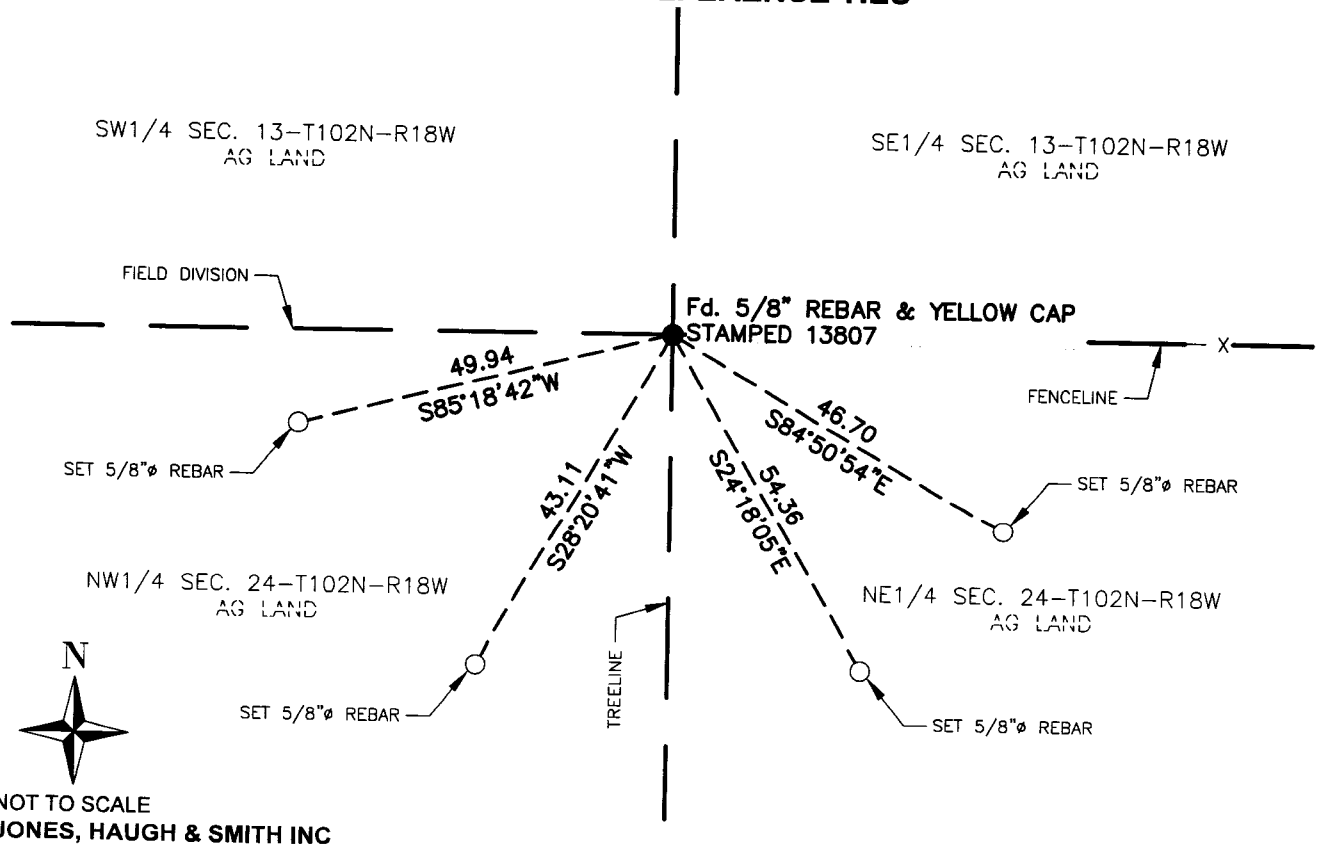

NOT TO SCALE

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

STATEMENT OF EVIDENCE

N1/4 Corner Section 24-T102N-R18W

July 1854: This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in July, 1854. The government notes show a wood post was set with a mound of earth and trench.

No previous information found in Mower County records.

1987: Jones, Haugh & Smith crew used fence corners as best evidence of the original public land survey corner location and set 5/8" rebar & yellow cap stamped 13807.

April 16, 2025: Jones, Haugh, & Smith crew recovered 5/8" rebar & yellow cap stamped 13807. Checked existing ties and left 5/8" rebar capped 13807 in place and made ties.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.


MONUMENT
RLS
13507


EAST


NORTH