I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

Steven J. Thompson 4-16-25
Steven J. Thompson Date

Registration No. 22705

☒ Land Surveyor, ☐ Professional Engineer
☐ County Surveyor, ☐ County Engineer

MOWER COUNTY COORDINATES
NAD 83 (96) HARN

Northing=149279.23 Latitude=N43°37'50.250643"
Easting=770188.26 Longitude=W92°55'46.454440"

A687776

Office of the County Recorder
Mower County, Minnesota

I HEREBY CERTIFY THE WITHIN INSTRUMENT WAS FILED, AND/OR RECORDED ON 5/20/2025 8:36 AM

PACKAGE: 108344 **REC FEE: $0.00**

Sara Madison, Mower County Recorder

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section **24**, Township **102N** Range **18W**, **5th** P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On **02/13/2025** (DATE) found a **1/2"Ø PIPE CAP 11009**

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

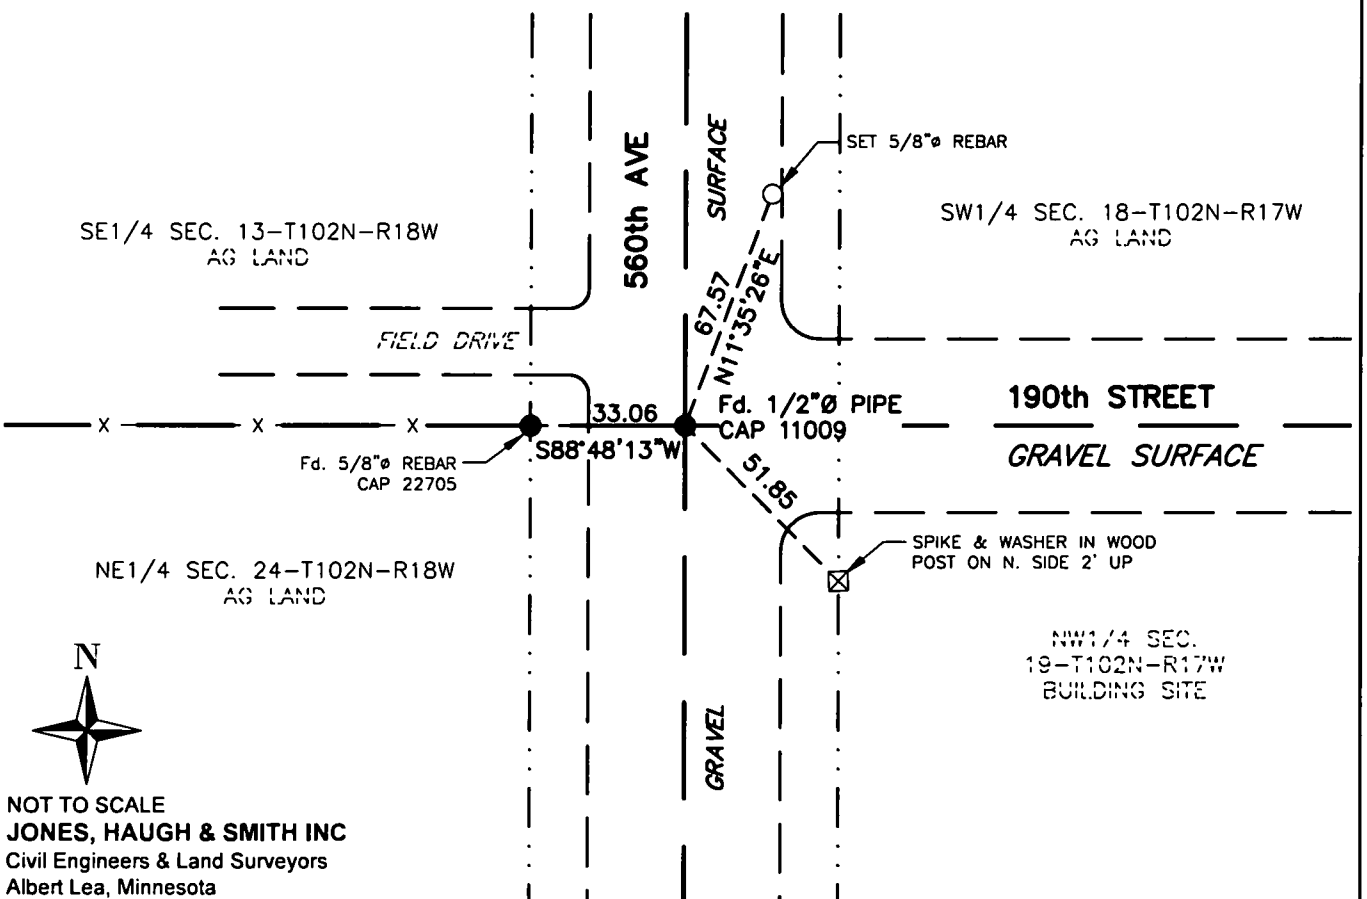

NOT TO SCALE

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

STATEMENT OF EVIDENCE

NE Corner Section 24-T102N-R18W

This corner was established by Deputy Surveyor E.T. Norris in August, 1853. The government notes show a wood post was set and mound with trench and pits per instructions during public land survey.

February 13, 2025: Jones, Haugh & Smith crew recovered 1/2"Ø pipe cap 11009 set by Ronald J. Olson. The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner. Left 1/2"Ø pipe cap 11009 in place and made ties.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.


MONUMENT


EAST


NORTH