Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 25, Township 102N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-14-91 (DATE) found a 5/8"Ø iron capped (13807)

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-14-91 (DATE) placed a cast iron monument over iron found.

SKETCH OF REFERENCE TIES

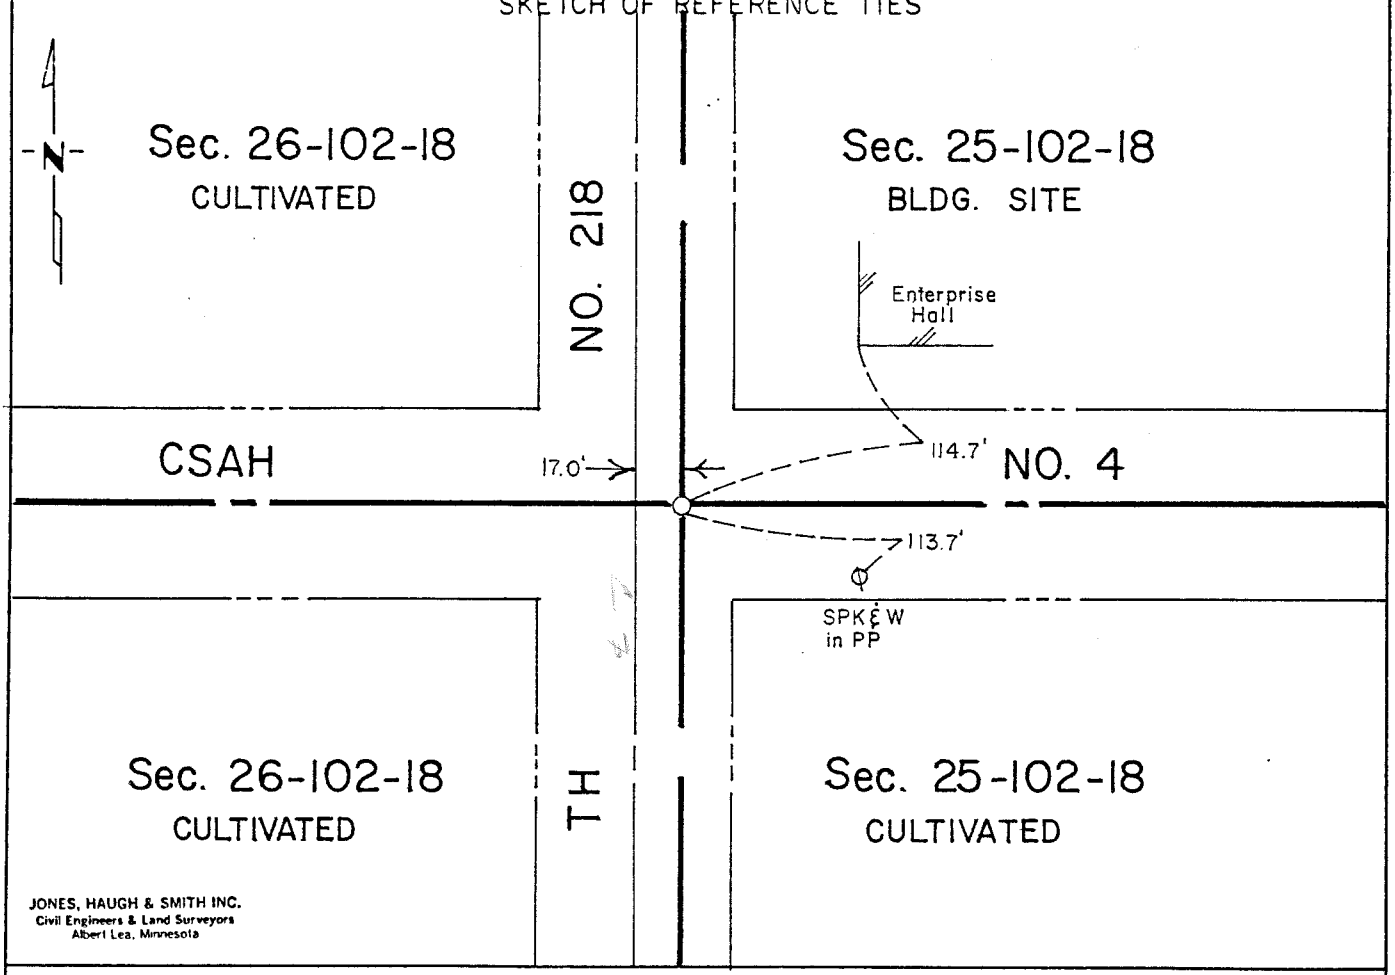

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ SIGNATURE 5-16-91 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 25-102-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

12" Burr Oak S 73° E 130 links (85.80 ft)
6" Burr Oak S 82 1/2° W 150 links (99.0 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Survey

1972 Private notes from Jones, Haugh & Smith tie book shows the corner 17.1 feet east of the centerline of U.S. Highway 218. The following notes were taken:

MHD Sta. 281+99.9
Spike and W 36" Elm NE 63.85'
Spike and W TP NW 66.1'

1982 Jones, Haugh and Smith Inc crew located a corner and placed a capped 5/8" diameter iron 1.45' south of old corner and 17.1' east of the centerline of Highway 218 during the survey in SE 1/4 SE 1/4 Section 26-102-18 using monumentation and information from TH 218 R/W map.

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, for bituminous overlay project SAP 50-604-18, placed a cast iron monument over 5/8" diameter iron capped 13807 placed in 1982 on centerline of E-W road and 17.1' east of the N-S road centerline.

The monument agrees with past records and fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.