I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

Steven J. Thompson 7-29-25
Date

Registration No. 22705

☒ Land Surveyor, ☐ Professional Engineer
☐ County Surveyor, ☐ County Engineer

MOWER COUNTY COORDINATES
NAD 83 (96) HARN
Northing=N138567.21 Latitude=N043°36'05.406303"
Easting=E762379.39 Longitude=W092°57'34.354340"

A689078

Office of the County Recorder
Mower County, Minnesota

I HEREBY CERTIFY THE WITHIN INSTRUMENT WAS FILED, AND/OR RECORDED ON 8/13/2025 8:11 AM

PACKAGE: 110304 REC FEE: $0.00

Sara Madison, Mower County Recorder

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 26, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 4/16/2025 (DATE) found a CAST IRON MONUMENT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

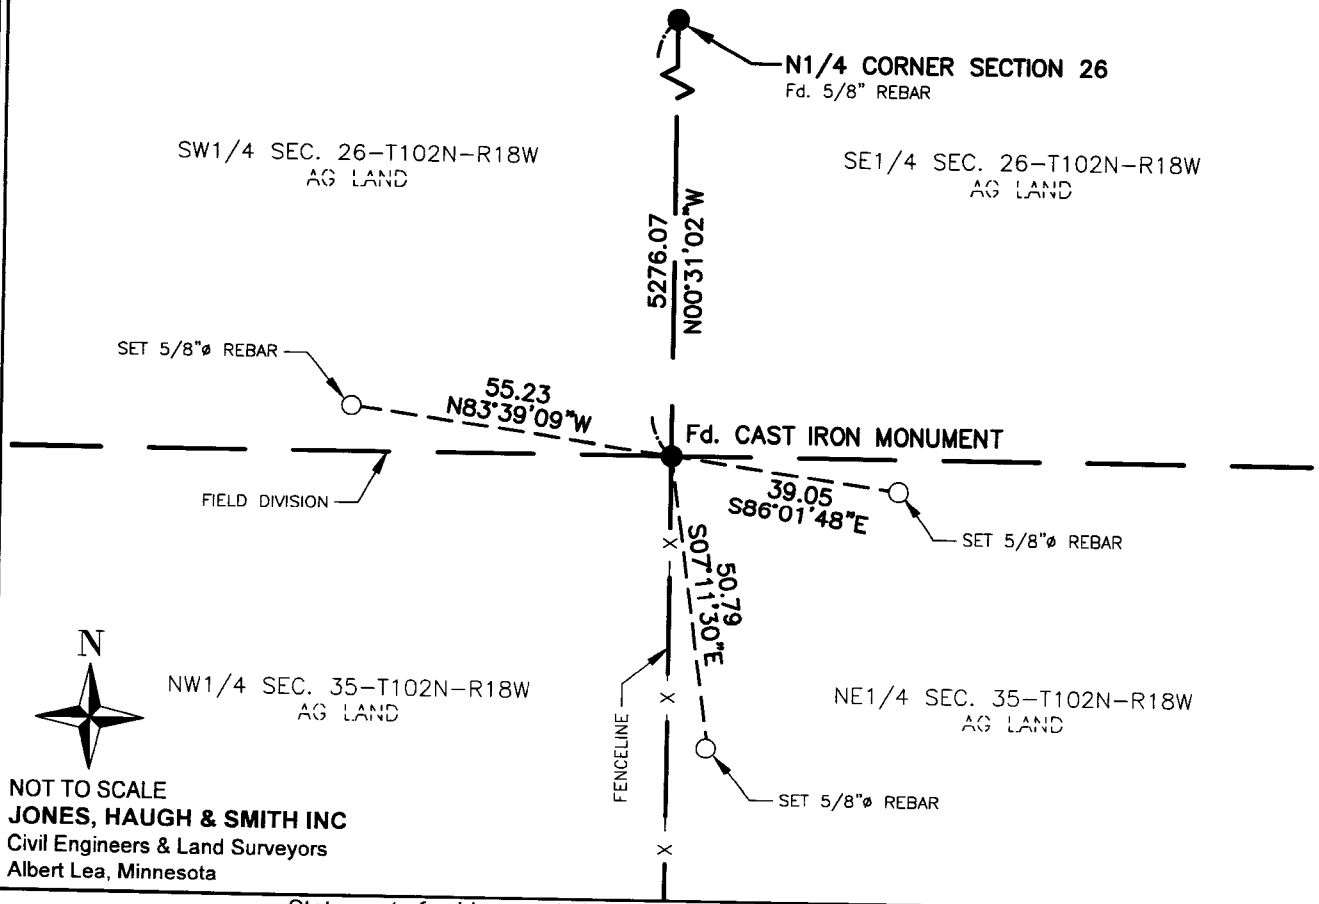

NOT TO SCALE

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

STATEMENT OF EVIDENCE

S1/4 Corner Section 26-T102N-R18W

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in July, 1854. At 2640 feet, set corner section post at average distance, 8" Burr Oak N 86.25° W 201 links (132.66 feet), 12" Burr Oak N 8° W 210 links (138.60 feet).

No previous information found in Mower County records.

6 January 1988: JHS crew retraced corner using obliterated methods. Corner position fits occupation within the section and is accepted as best evidence of the position of the original Public Land Survey corner.

April 16, 2025: Jones, Haugh, & Smith crew recovered cast iron monument. Checked existing ties and left cast iron monument in place and made ties.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.


MONUMENT


EAST


NORTH