CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 27, Township 102 N, Range 18 W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 7-2-90 found STONE 1.2 x 1.2 x 2.1 H.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 7-11-90 placed COUNTY CAP ON A 3/4" REBAR

SKETCH OF REFERENCE TIES

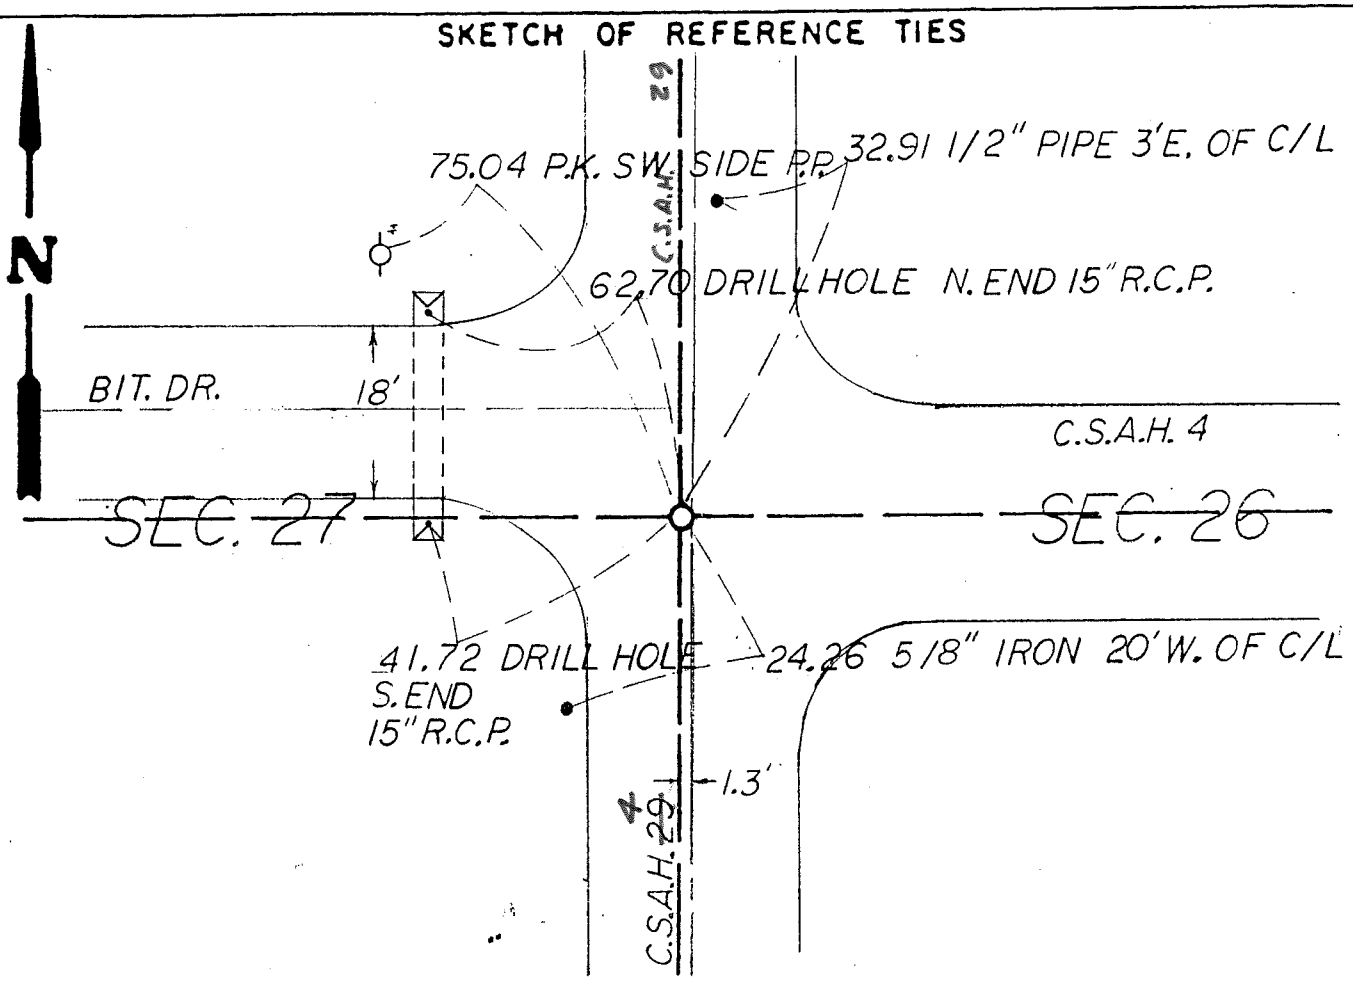

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature

7-13-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer

☐ County Surveyor ☐ County Engineer

Zenk•Read•Trygstad & ASSOCIATES, INC.

Engineers / Architects / Land Surveyors / Planners

Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

EAST QUARTER CORNER SECTION 27, TOWNSHIP 102 NORTH, RANGE 18 WEST, 5TH P.M.

July, 1854 — William Anderson, Deputy Surveyor, set a post at the corner during the original Public Land Survey.

1964 — Page 127 of the Mower County Surveyors Record shows a stone and 1" pipe inplace.

1989 — County Engineers Road Plans shows a PK nail inplace over the corner.

July 2, 1990 — Ronald J. Olson, RLS #11009, excavated with a backhoe a trench two feet North to three feet South of centerline of C.S.A.H. #4 and 2 feet East, four feet below surface, to three feet West, 4.5 feet below surface, of the centerline of C.S.A.H. 29 and found a 1.2'x1.2'x2.1' H stone 2.5 feet below surface and set in mottled soil. A 3/4 inch rebar was found two feet below surface driven into one inch pipe on North side of stone.

An analysis of the record data gives no indication of the origin of the stone. Stones of this size have been found and identified as replacements for many other corners throughout this county. The stone has been recognized as the corner by the County for the past 26 years and is accepted as marking the location of the original Public Land Survey Corner.