I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

4-16-25

Steven J. Thompson — Date

Registration No. 22705

☒ Land Surveyor, ☐ Professional Engineer
☐ County Surveyor, ☐ County Engineer

MOWER COUNTY COORDINATES
NAD 83 (96) HARN

Northing=140926.94 Latitude=N43°36'30.815469"
Easting=743855.57 Longitude=W93°01'45.709251"

A687779

Office of the County Recorder
Mower County, Minnesota

I HEREBY CERTIFY THE WITHIN INSTRUMENT WAS FILED, AND/OR RECORDED ON 5/20/2025 8:36 AM

PACKAGE: 108344 **REC FEE: $0.00**

Sara Madison, Mower County Recorder

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section **29**, Township **102N** Range **18W**, **5th** P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On **02/10/2025** (DATE) found a **FD 5/8"Ø REBAR CAP 13807**

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

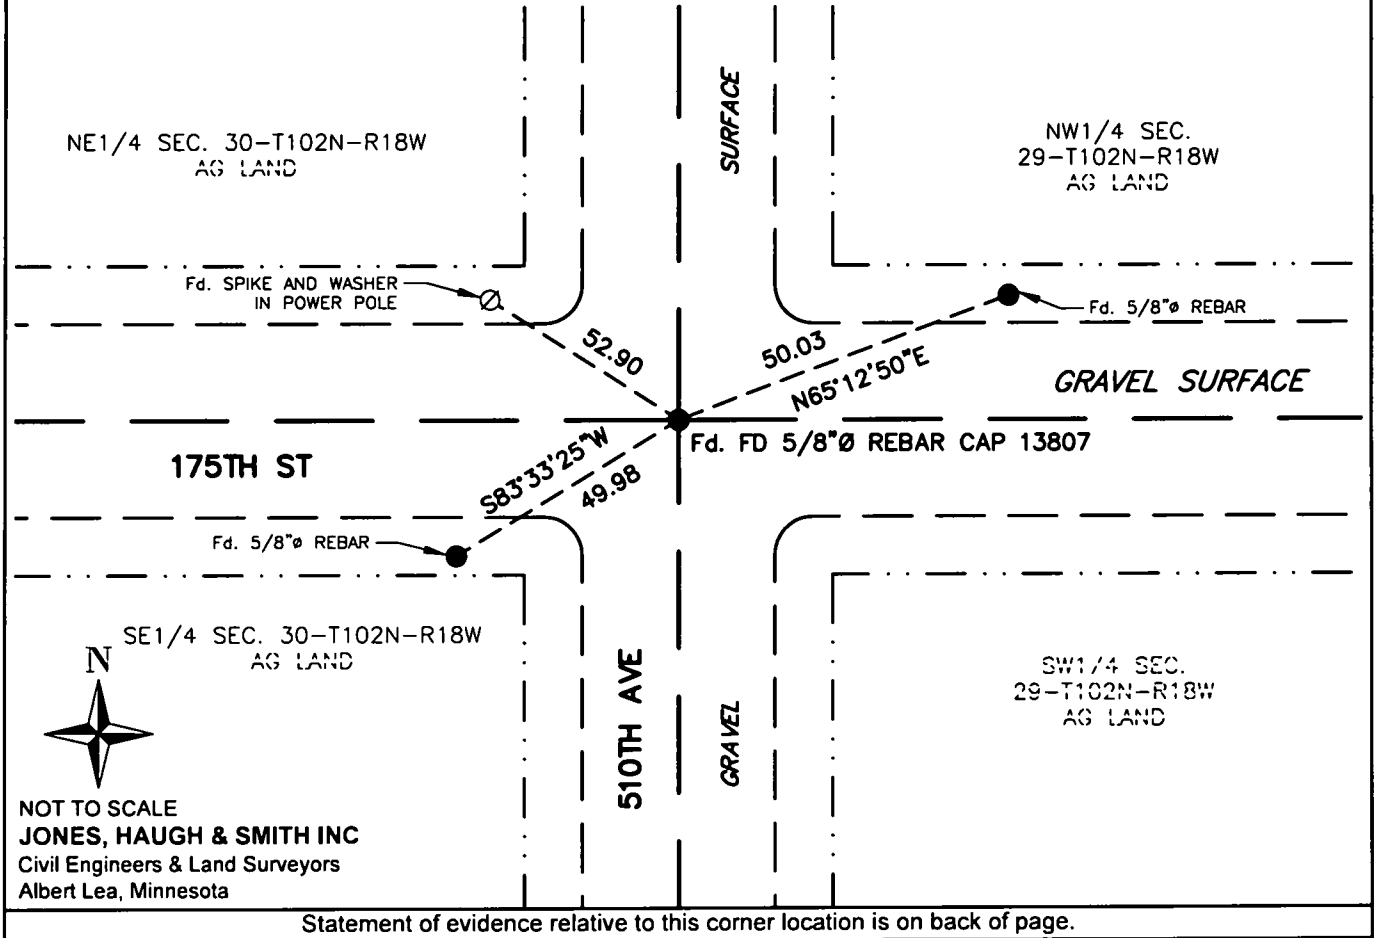

NOT TO SCALE

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

STATEMENT OF EVIDENCE

W1/4 Corner Section 29-T102N-R18W

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in July, 1854. At 2460 feet, set corner section post, deposited charcoal, raised mound of earth with trench and pits, as per instructions, planted Cherry NE Locust SW.

Claussen Field Notes show government post for E1/4 corner of section 30 in 1884.

21 April 1988: Jones, Haugh & Smith crew excavated with backhoe on the centerline of N-S and centerline of E-W highways and found nothing, dug at last position and found nothing. Set a 5/8"Ø iron at split 8' South of centerline of E-W road.

04 June 2003: Found capped 5/8"Ø iron No. 13807 on centerline of N-S road and 8'± South of E-W road centerline. No evidence of original monument was found. The corner was restored by lost methods, and is accepted as best evidence of original Public Land Survey corner Location.

February 10, 2025: Jones, Haugh & Smith crew recovered 5/8"Ø iron No. 13807 set in April 1988. Checked ties and left 5/8"Ø iron No. 13807 in place.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.


MONUMENT


EAST


NORTH