A687778

Office of the County Recorder
Mower County, Minnesota

I HEREBY CERTIFY THE WITHIN INSTRUMENT WAS FILED, AND/OR RECORDED ON 5/20/2025 8:36 AM

PACKAGE: 108344 REC FEE: $0.00

Sara Madison, Mower County Recorder

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

Steven J. Thompson 4-16-25 Date

Registration No. 22705

☒ Land Surveyor, ☐ Professional Engineer
☐ County Surveyor, ☐ County Engineer

MOWER COUNTY COORDINATES
NAD 83 (96) HARN

Northing=143574.61 Latitude=N43°36'56.964862"
Easting=743820.01 Longitude=W93°01'45.793239"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 29, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 02/10/2025 (DATE) found a CAST IRON MONUMENT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

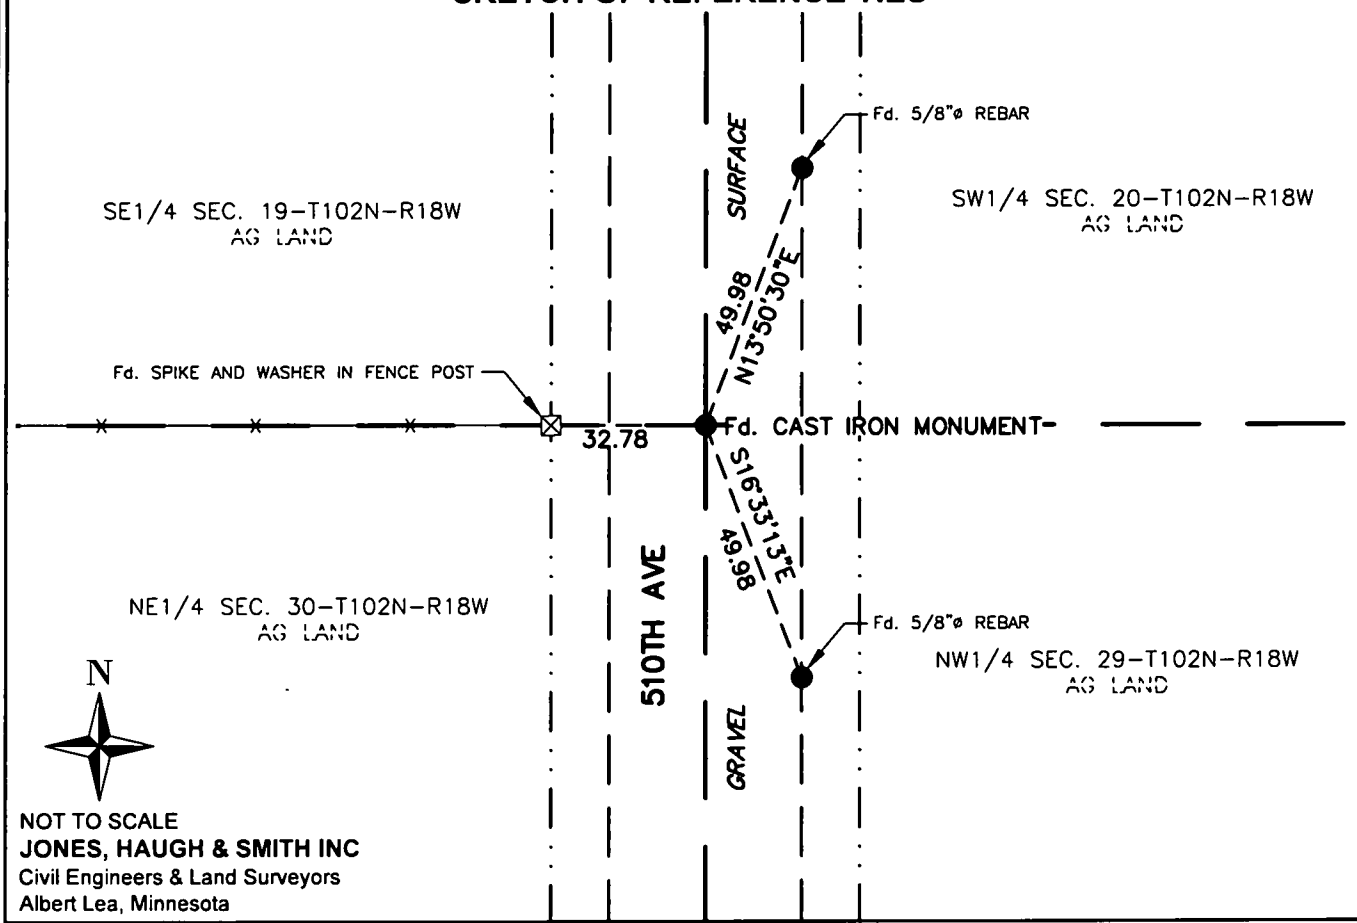

NOT TO SCALE

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

STATEMENT OF EVIDENCE

NW Corner Section 29-T102N-R18W

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in July, 1854. At 5280 feet, set corner post for sections 19, 20, 29, and 30, deposited charcoal, raised mound of earth with trench and pits, as per instructions, planted Cherry NE Locust SW.

4 June 2003: JHS crew excavated with backhoe and found 3" x3" square iron. Set cast iron monument over 3" x 3" square iron. The square iron monument is accepted as best evidence of the position of the original Public Land Survey corner.

February 10, 2025: Jones, Haugh & Smith crew recovered cast iron monument set in June 2003. Checked existing ties and left cast iron monument in place.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.


MONUMENT


EAST


NORTH