Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 31, Township 102N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10/15/1991 (DATE) found a 6" CLAY TILE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10/15/1991 (DATE) placed a 5/8"ø x 16" IN TILE WITH CAST IRON MONUMENT OVER 5/8"ø IRON

SKETCH OF REFERENCE TIES

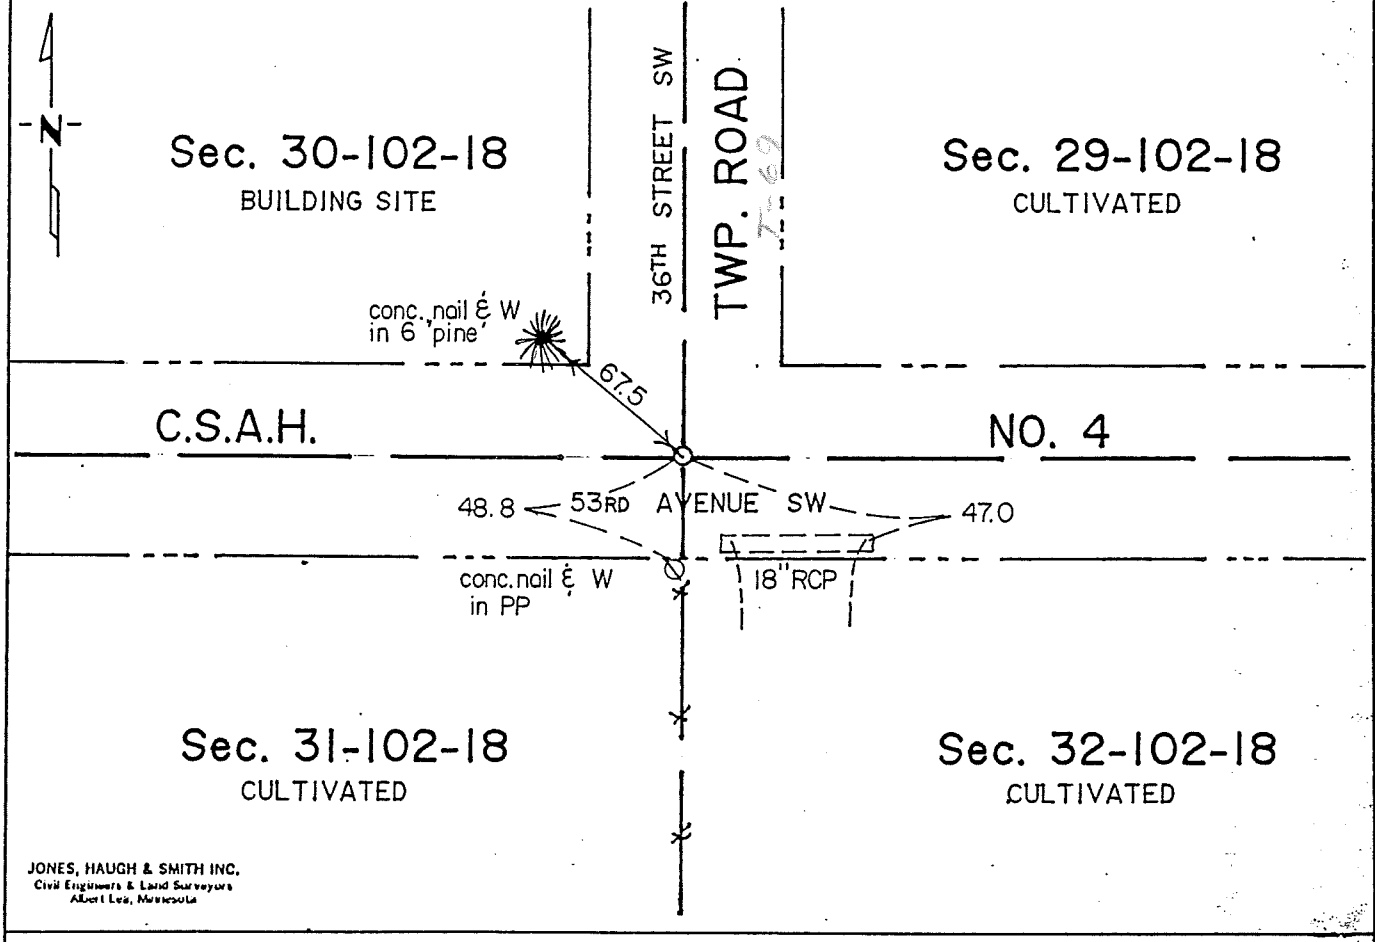

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-16-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Sec 31-102-18

This corner was originally established by Deputy Surveyor Wm. I Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1930 Mower County Grading Plans shows a monument inplace and the following ties were taken:
31.0' South the Maple Tree
32.5' NW to CFP
38.2' NE to CFP

1953 Recorded in Book "A" in the Office of the County Engineer a concrete monument is shown and the following ties were taken:
95.5' NNW to 18" blazed Spruce
58.4' NE to telephone pole
99.1' SSE to third steel fence post
50.7' SSW to power pole

1982 County Grading Plan shows a cast iron monument inplace over concrete monument.

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte IV, dug with the County backhoe on centerline centerline of north-east-west roads for bituminous overlay project and uncovered a 6" concrete monument cast in a clay tile 3 feet below road surface in virgin soil. Found no evidence of cast iron monument set by County in 1982 Grading Project. Accepted concrete monument which agrees with past records and set a cast iron monument over monument on road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.