Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 31, Township 102N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-15-91 (DATE) found a cast iron monument

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

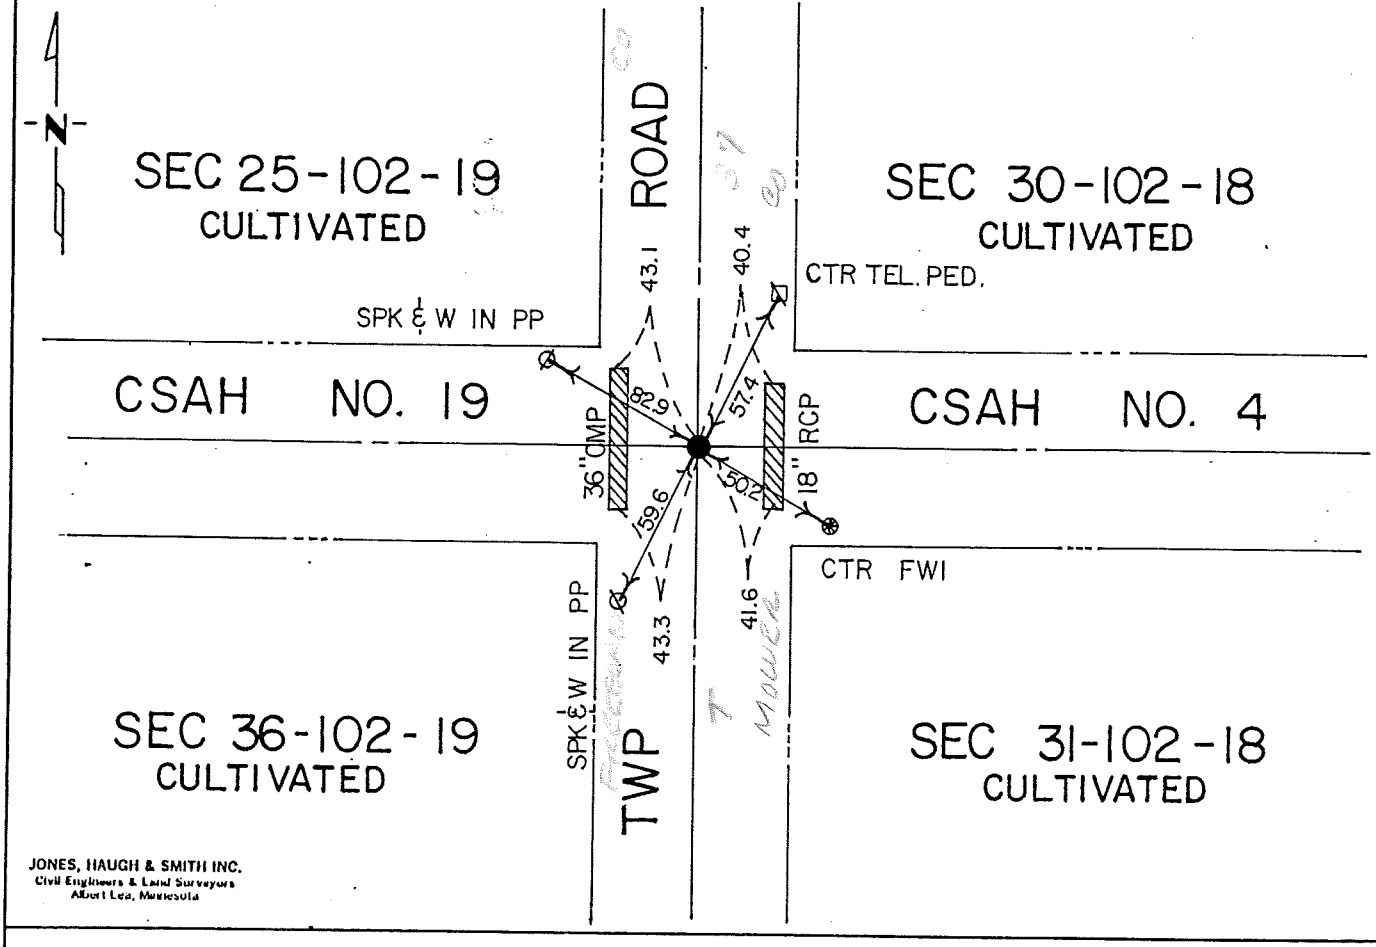

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-16-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 31-102-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1854. The government notes show corner was marked with a wood post and charred stake and a trench with a mound of earth. Cherry and locust seeds were planted northeast and southwest of corner.

The following were contacted for section corner information:
Mower County Engg Dept Freeborn County Engg Dept

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1930 Mower County Grading Plans show a monument found at Sta 0+00 and the following ties were taken:
40.0' NW to mail box post
46.0' SW to east gate post
39.3' NE to telephone post
57.7' SW to west gate post

1938 John Nielsen, the Freeborn County Survey RLS 1427, dug in center of intersection of roads, and found an oak stake in center of clay tile.

1953 Recorded in Book 'A' in the office of the Mower County Engineer a concrete monument was found over a 1/2" diameter iron pipe and the following ties were taken:
45.4' NW to a 12" CFP
56.0' SW to power pole
50.0' SW to center tile inlet
39.1' SE to center tile inlet
106.4' ESE to telephone pole

1968 Larry Nelsen, Freeborn County employee, found a wood stake at this corner. Placed a pipe over wood stake found. Took three ties.

1988 Jones, Haugh & Smith crew under the direction of John Schulte, Freeborn County Surveyor RLS 13807, dug on the centerline of north-south-east-west road intersection, and uncovered 5/8" diameter iron two feet deep, and a 1/2" diameter iron and wood stakes cast in concrete inside a clay tile 3 1/2 feet deep.

Found no further evidence of the public land survey. Accepted wood stakes in clay tile found as best evidence of a perpetuation of the original public land survey corner and set cast iron monument on road surface over wood stakes found.

1991 Jones, Haugh & Smith Inc crew uncovered cast iron monument.

For electronic survey data contact the firm of Jones, Haugh & Smith Inc.