Index No. P 49, "T"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 31, Township 102N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 12-1-92 (DATE) found a 2" x 4" CIM NEXT TO A DECAYED WOOD POST

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12-1-92 (DATE) placed a 5/8"ø x16" IRON CAPPED RLS NO. 13807

SKETCH OF REFERENCE TIES

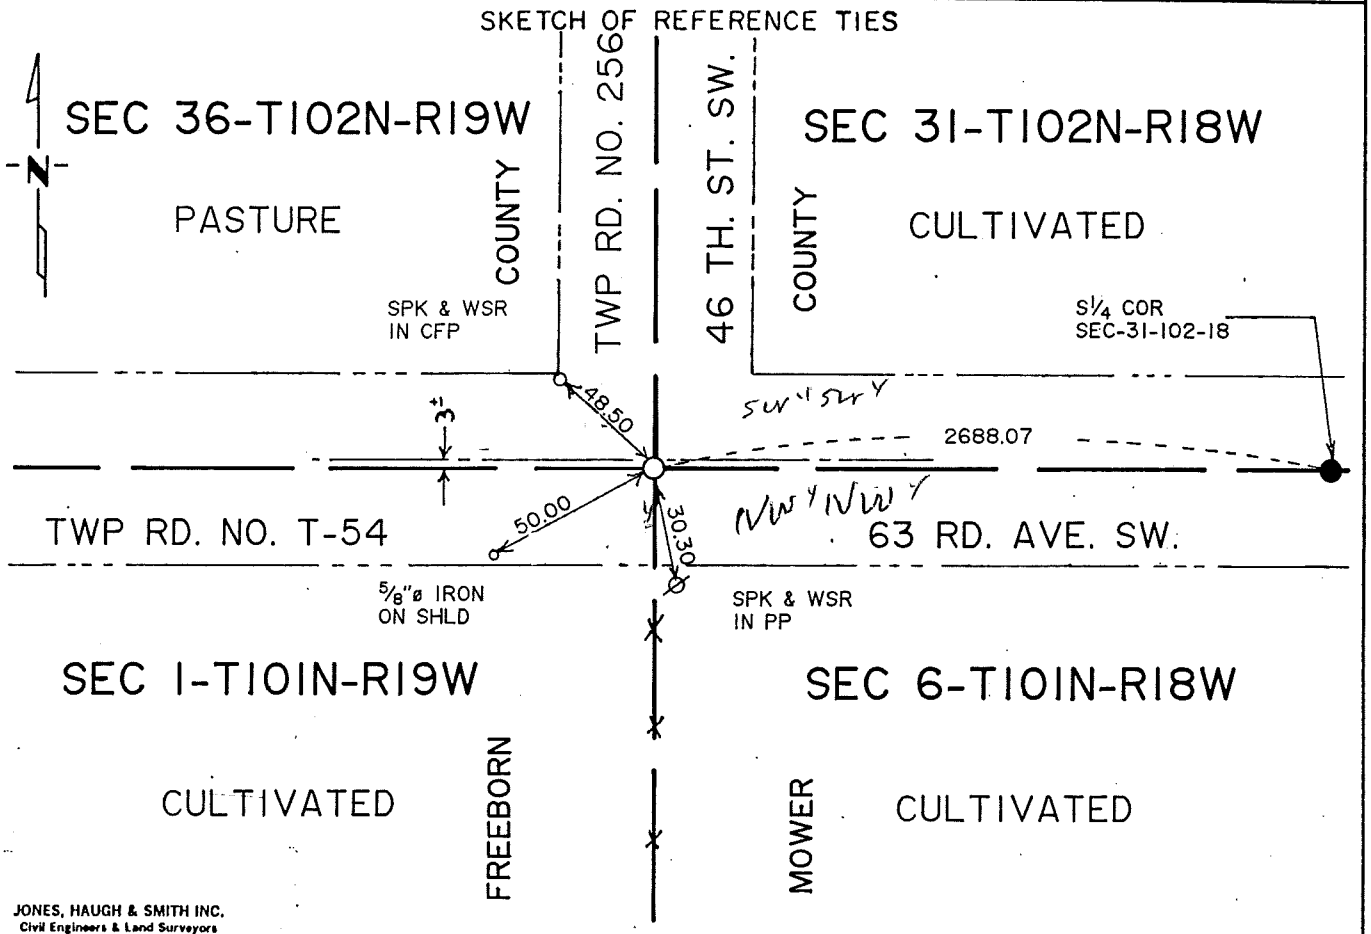

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 4-30-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 4 day of May A.D., 1993

COUNTY RECORDER Edwardo Enga

By Marlene Martin, Deputy

DOCUMENT NO. 420179

Bk 79 Mtg Pg. 324

BOOK 69 PAGE 324

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec. 31-102-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Survey Office in 1853. The government notes show charcoal was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Engineering Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

Book R indicates that F.H. Fisk, Freeborn County Surveyor, found an iron stake and popular tree at the southeast corner Section 1-101-19.

1940 Book 1 indicates that John Nielsen, Freeborn County Surveyor, dug and found a cast monument in south wheel track of east-west road and in line with fence south. The following ties were taken:
Face of power pole 29.6' S
Face of corner post 44.2' NE

1992 Jones, Haugh & Smith crew under the direction of John H. Schulte IV, RLS #13807, Freeborn County Surveyor, dug with a jackhammer at the centerline centerline intersection of township roads and found a 2"x4" cast iron monument 3.5 feet deep and at the north side of decayed wood post. Therefore we accepted 2"x4" cast iron monument as the perpetuation of the original public land survey corner and set a 5/8" diameter x 16" iron, capped RLS 13807, near road surface and above monuments found.

The monument set fits occupation and road centerlines within the section and is accepted as best evidence of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

BOOK 79 PAGE 325

Jones & Haugh