Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 32, Township 102N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 5-8-86 (DATE) found a spike and washer; no evidence of PLS corner.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 5-8-86 (DATE) placed a 5/8"ø iron on road surface at location of spike found.

SKETCH OF REFERENCE TIES

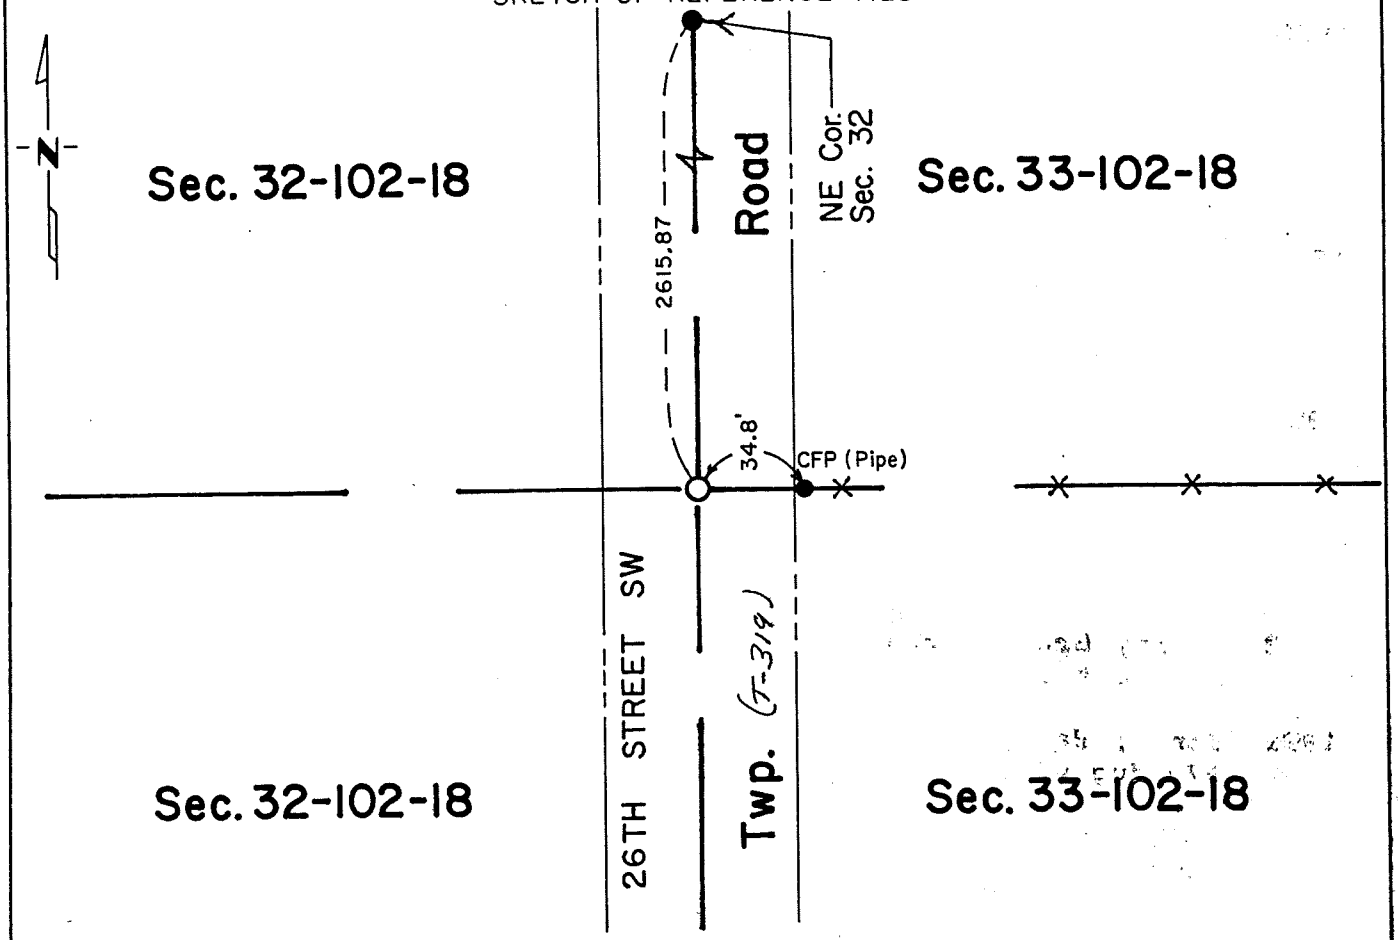

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-10-91

Registration No. 13607

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Sec 32-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a post and the following ties were taken:

10" Burr Oak	South	83 links (54.78 ft)
10" Burr Oak	S 1 1/2° E	81 links (53.46 ft)

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1981 Jones, Haugh & Smith crew under the direction of John H. Schulte IV dug in centerline road in line with fences east and west. Placed spike on W 1/4 corner of Section 33.

1986 Jones, Haugh & Smith crew found a spike and washer on centerline north-south road in line with fence east. Excavated with backhoe for original monument and found no further evidence of public land survey corner or a perpetuation thereof. Placed a 5/8" diameter iron on centerline of road surface at location of spike found.

Corner placed fits occupation and road centerline and is accepted as best evidence found of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.