I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

7-29-25

Steven J. Thompson — Date

Registration No. 22705

☒ Land Surveyor, ☐ Professional Engineer
☐ County Surveyor, ☐ County Engineer

MOWER COUNTY COORDINATES
NAD 83 (96) HARN
Northing=N135644.99 Latitude=N043°35'38.652677"
Easting=E743890.79 Longitude=W093°01'46.027214"

A689083

Office of the County Recorder
Mower County, Minnesota

I HEREBY CERTIFY THE WITHIN INSTRUMENT WAS FILED, AND/OR RECORDED ON 8/13/2025 8:11 AM

PACKAGE: 110304 **REC FEE: $0.00**

Sara Madison, Mower County Recorder

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 32, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 4/11/2025 (DATE) found **NOTHING**

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4/11/2025 (DATE) placed a **5/8" REBAR & YELLOW CAP STAMPED 22705**

SKETCH OF REFERENCE TIES

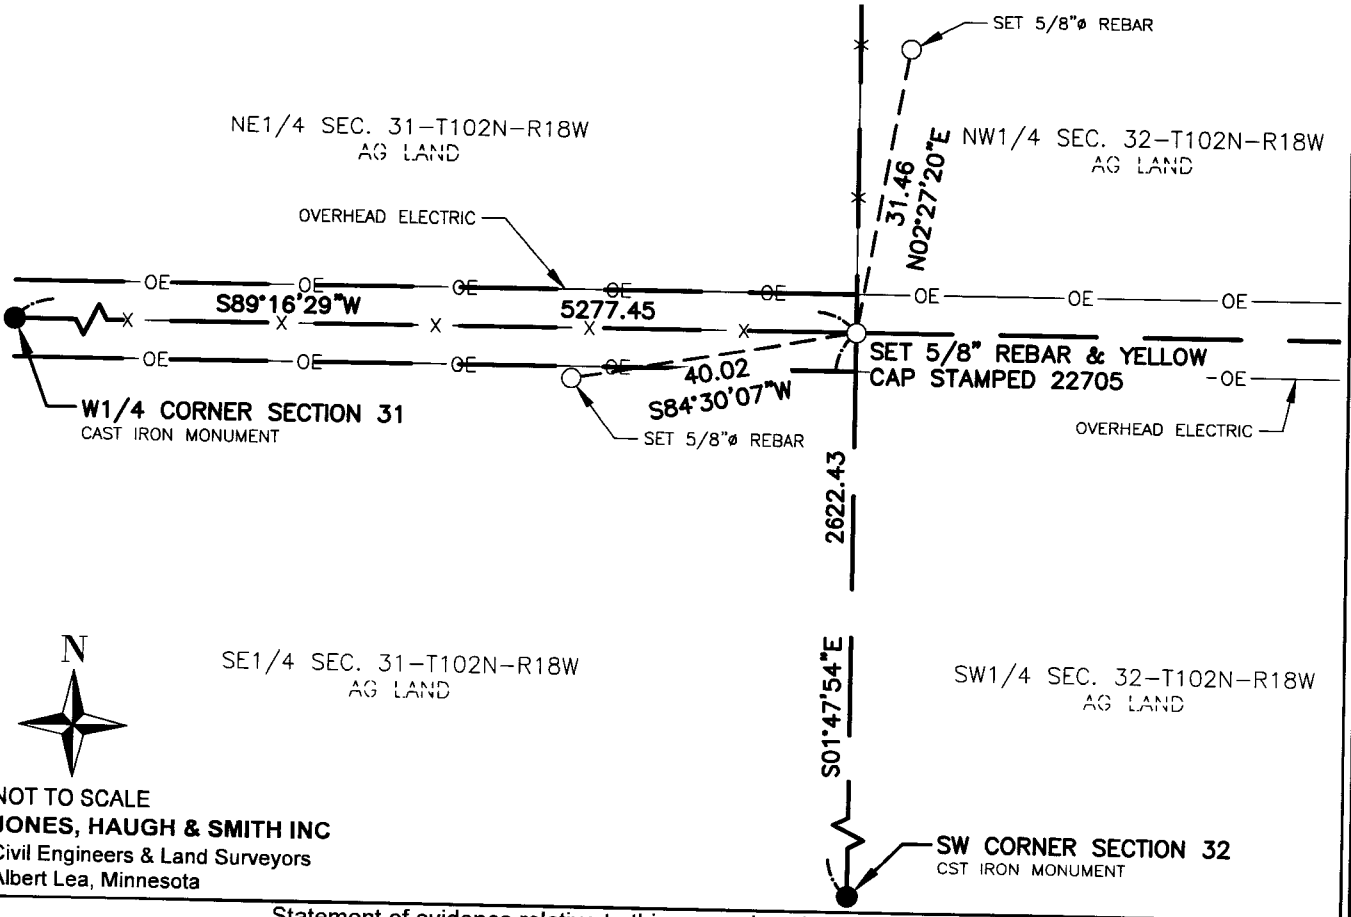

NOT TO SCALE

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

STATEMENT OF EVIDENCE

W1/4 Corner Section 32-T102N-R18W

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in July, 1854. Set quarter section post, deposited charcoal, raised mound of earth with trench and pits, as per instructions, planted Cherry NE Locust SW.

No previous information was found in Mower County Records.

25 August 2003: JHS crew used position of corner at center of fence post of fence line north and fence line west underneath power lines running E-W. The fence corner fits occupation within the section as is accepted as best evidence of position of original Public Land Survey corner.

April 11, 2025: Jones, Haugh, & Smith crew searched corner location and found nothing. Used dimensions from previous surveys to restore corner position by obliterated methods. Set 5/8" rebar & yellow cap stamped #22705 and made ties.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.


MONUMENT


EAST


NORTH