I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

1-23-26

Steven J. Thompson — Date

Registration No. 22705

☒ Land Surveyor, ☐ Professional Engineer
☐ County Surveyor, ☐ County Engineer

MOWER COUNTY COORDINATES
NAD 83 (96) HARN

Northing=159443.78 Latitude=N043°39'33.697809"
Easting = 743575.30 Longitude=W093°01'46.726245"

A692407

Office of the County Recorder
Mower County, Minnesota

I HEREBY CERTIFY THE WITHIN INSTRUMENT WAS FILED, AND/OR RECORDED ON 2/11/2026 9:55 AM

PACKAGE: 112928 **REC FEE: $0.00**

Sara Madison, Mower County Recorder

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 6, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/11/2025 (DATE) found a **ALUMINUM MONUMENT**

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

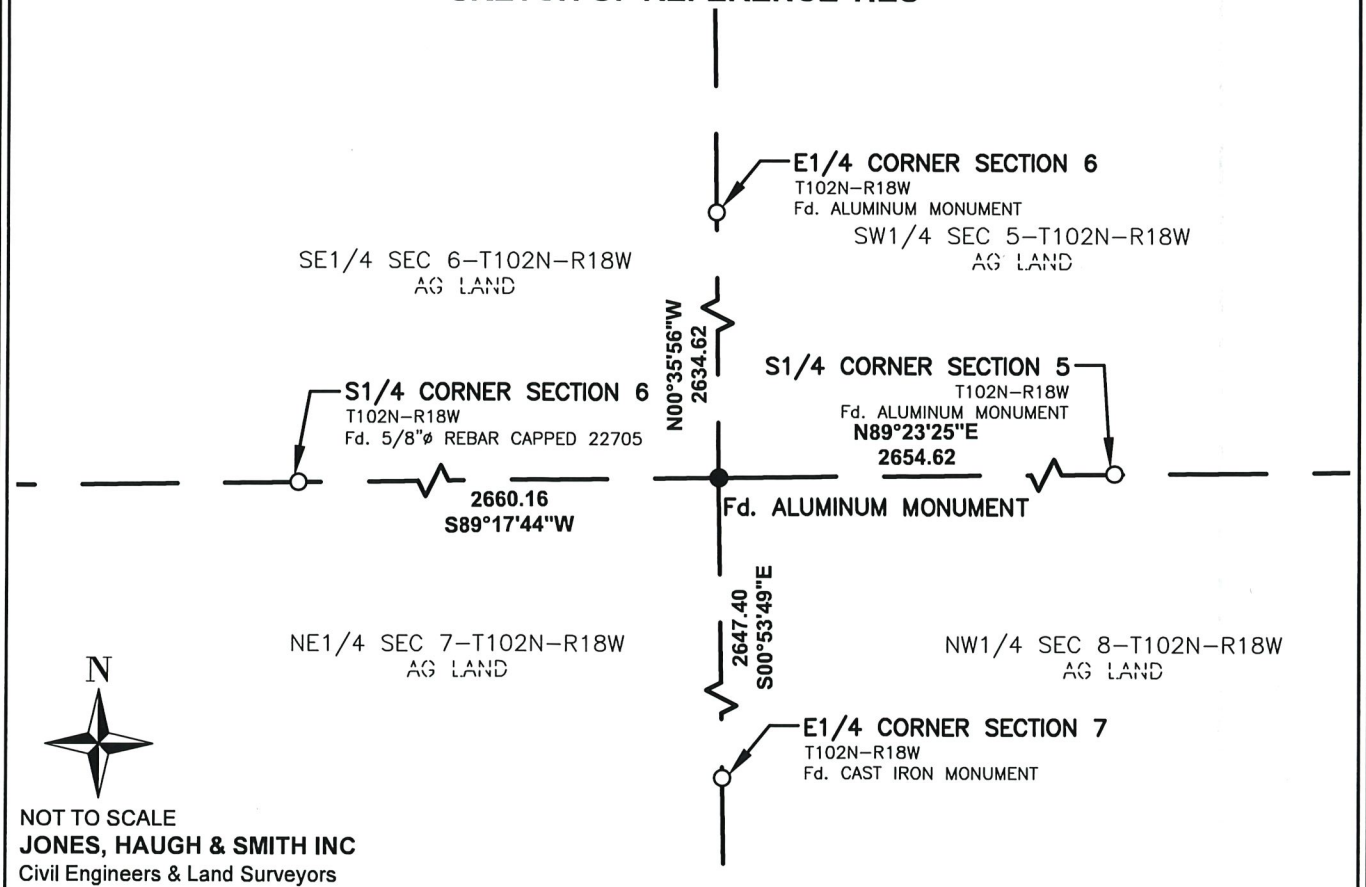

NOT TO SCALE

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

STATEMENT OF EVIDENCE

SE Corner Section 6-T102N-R18W

May-July 1854: This corner was established by Deputy Surveyor J.B. Reyman in May-July, 1854. The government notes show a wood post was set and mound with trench and pits per instructions.

1970±: Mndot right-of-way map 18-32 shows concrete monument at corner.

1970±; Jones, Haugh & Smith has used concrete monument for the corner for several surveys.

November 11, 2025: Jones, Haugh, & Smith crew recovered a aluminum monument. Left cast aluminum monument in place. The aluminum monument is accepted as the best evidence of marking the position of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.


MONUMENT


EAST


NORTH