CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 6, Township 103, Range 14, 5 P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

On 5-2-94 found 0.6 ø x 1.0 Stone in mottled soil with point up. Stone removed during excavation

☐ left monument as found, ☐ lowered monument, ☒ removed monument (explain)

On 5-2-94 placed Mower County Monument

SKETCH OF REFERENCE TIES

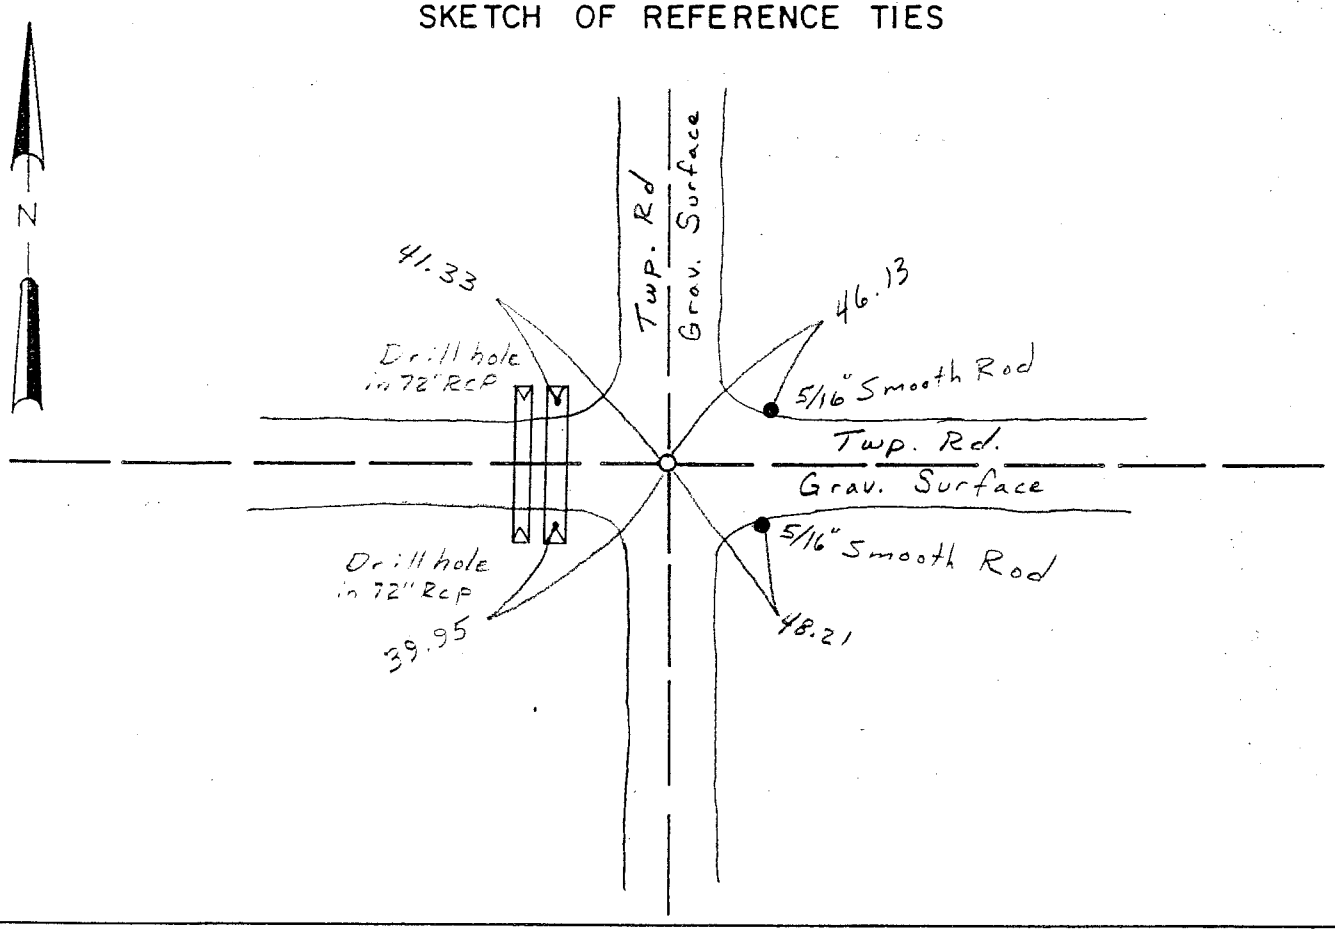

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Steven J. Hanson — 5-4-94

Signature — Date

Registration No. 22705

☒ Land Surveyor ☐ Prof. Engineer
☐ County Surveyor ☐ County Engineer

Zenk•Read•Trygstad & ASSOCIATES, INC.
Engineers/Architects/Land Surveyors/Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the _____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

North Quarter Corner of Section 6, Township 103 North, Range 14 West, 5th P.M., Mower County Minnesota.

Statement of Evidence

1853 John Ball, deputy surveyor, set a post at the corner and found:
N 87°30'W 935 links to 10" Black Oak
N 83°E 913 links to 10" Burr Oak

May 2, 1994 Steven J. Thompson, LS 22705, excavated a 5.5 foot deep trench using a backhoe and extending 4 feet north and 4 feet south by 6 feet west and 5 feet east of the Centerline intersection. A 0.6 foot diameter by 1.0 foot high stone was found with the point up 3.5 feet below the surface.

An analysis of the record gives no indication of the origin of the stone. Stones of similar size and shape have been found at other corners throughout the county. The stone is accepted as marking the location of the original public land survey corner.