Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 3, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/02/2004 (DATE) found a 3/4" IRON PIPE CAPPED 13810

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/09/2004 (DATE) placed a 5/8"X16" REBAR WITH CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

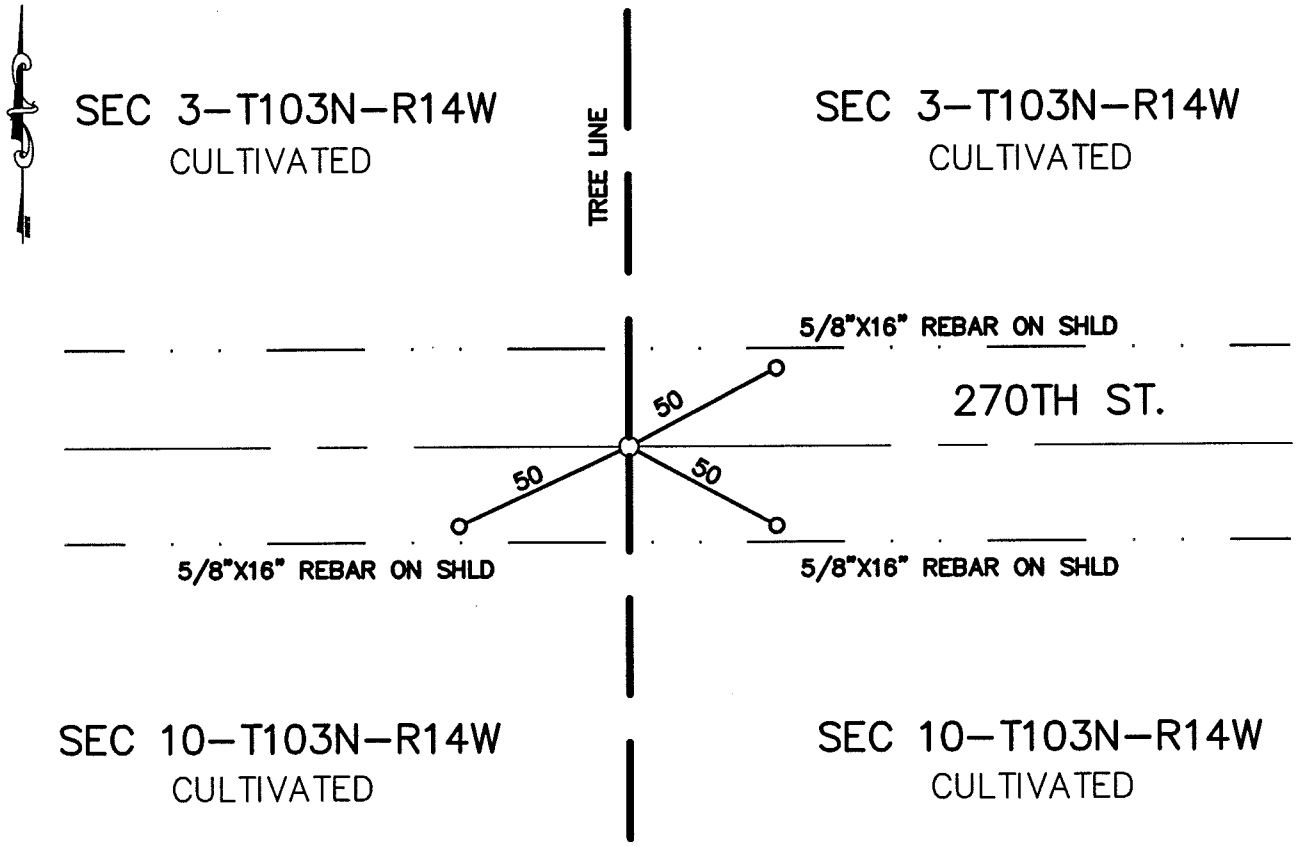

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 9-30-04 (DATE)

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

S 1/4 Corner Section 3-T103N-R14W

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand and found a ¾" iron pipe capped #13810 0.3' below road surface.

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Boe Brothers backhoe at the location of found pipe capped 13810. No other evidence of the original PLS corner was found. Reset the found pipe and placed a 5/8"x16" rebar with cast iron monument above 0.6' below road surface.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. "E" COR. BOOK " " PAGE 17

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 10, Township 103, Range 14, 5TH P.M.

STATE OF MINNESOTA, County of [redacted] MOWER.


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 5/5/89 (DATE) placed a 1/2" CAPPED IRON PIPE DOWN 0.3' IN ℄ OF E-W ROCK ROAD AND ON LINE WITH REMAINS OF OLD FENCE NORTH

SKETCH OF REFERENCE TIES

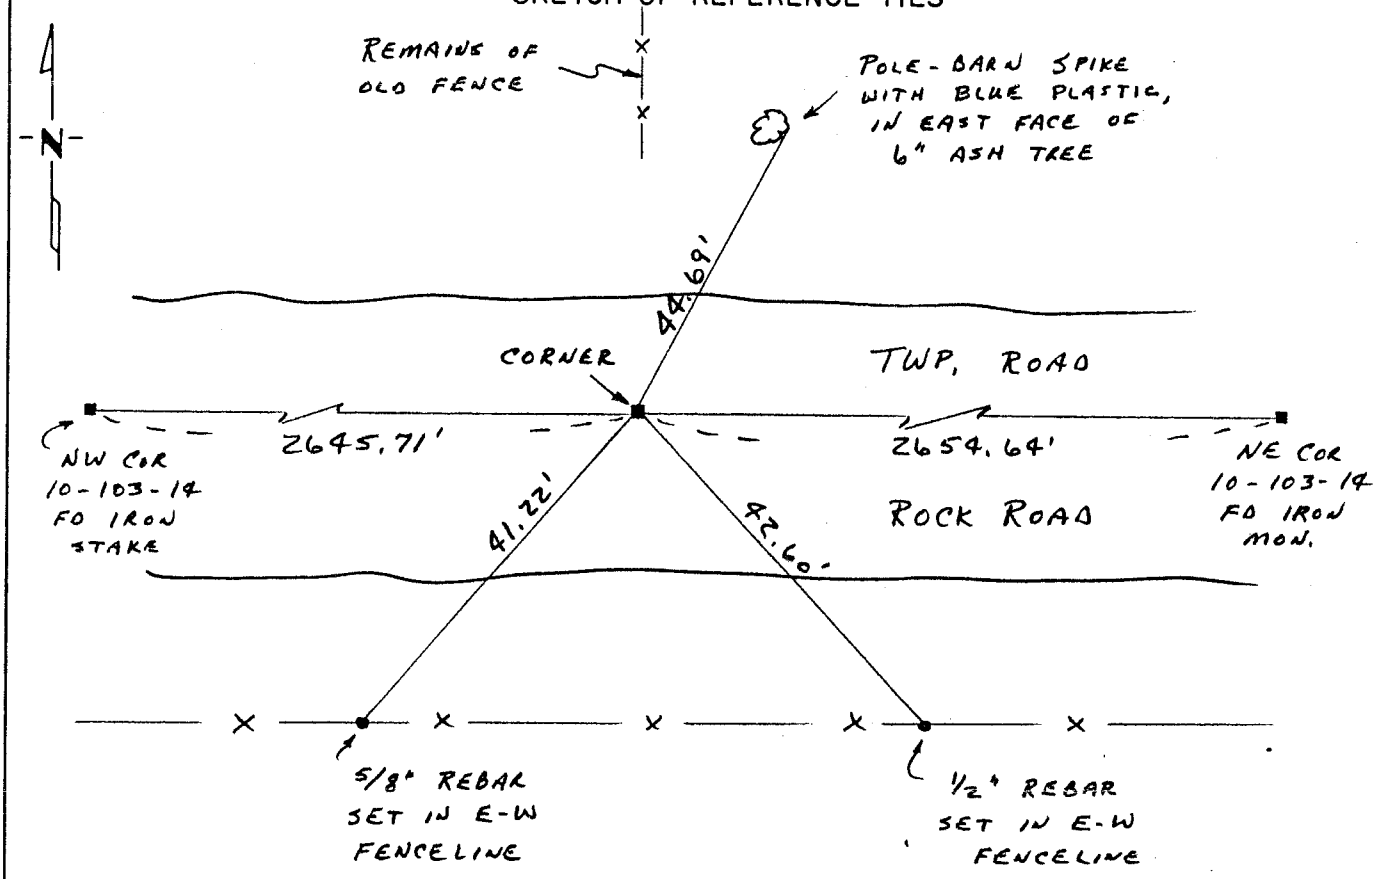

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Jerome R. Schwarz (SIGNATURE) 5/18/89 (DATE)

Registration No. 13810

☒ Land Surveyor,

☐ County Surveyor,

OFFICE OF THE COUNTY RECORDER
County of Fillmore

I hereby certify that this document was filed in the Recorder's office at _____ .M. on the ____ day of _____ A.D., 19 ___

Co. Recorder _____

By _____, Deputy

DOCUMENT NO. _____