Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 11, Township 103N, Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 8-29-91 (DATE) found a 3/4" ø x 12" iron

☐ left monument as found, ☐ lowered monument, ☒ removed monument (explain)

☒ On 8-29-91 (DATE) placed a Cast iron monument at location of 3/4" ø iron

SKETCH OF REFERENCE TIES

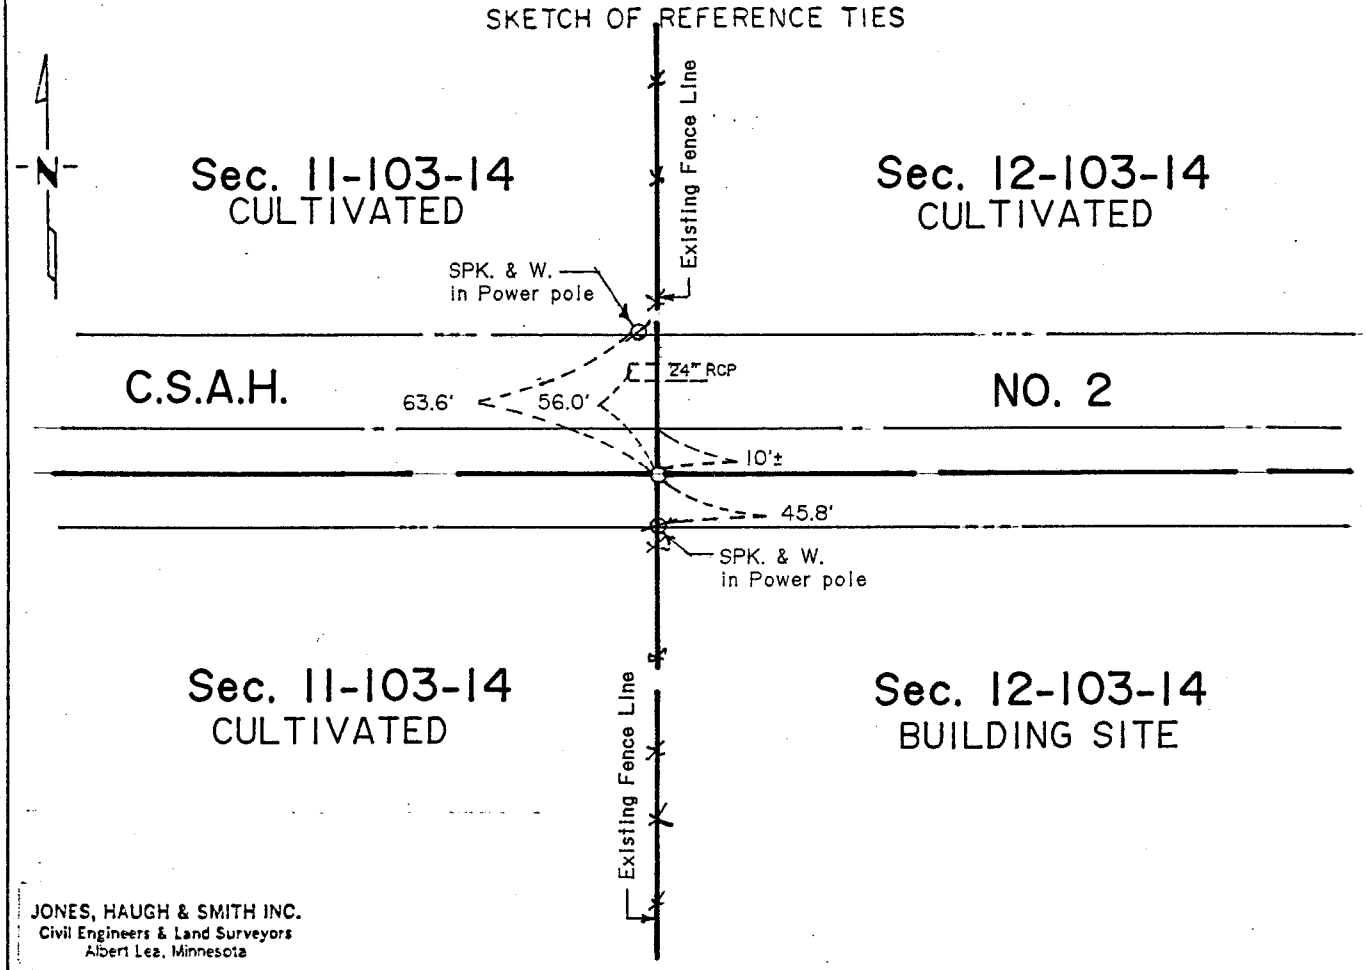

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-11-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Section 11-103-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

6" Burr Oak	N 17 1/4° E	90 links (59.40 ft)
6" Burr Oak	S 13 1/4° W	528 links (348.48 ft)

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

1989 County grading plan shows 1/4 corner 10.0 feet south of centerline PI in line with fence north and south. The following ties were taken:
39.8' N to CFP
35.6' S to 3" steel CFP
30.8' S face of PP
33.9' N face of PP

Also noted on grading plan was a 3 foot core cut made at this location which would have destroyed the original public land survey corner of any perpetuation thereof.

1991 Jones, Haugh & Smith Inc crew using information from 1989 grading plan dug with County backhoe 10.0 feet south of centerline PI and uncovered a 3/4" diameter x 12" iron one foot below road surface. Continued digging and found no further evidence of public land survey corner or a perpetuation thereof. Therefore established position of corner using location of 3/4" x 12" iron as best evidence. Set a cast iron monument at this location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.