Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 13, Township 103N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 5-24-91 (DATE) found a harrison cast iron monument 0.5' below surface

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

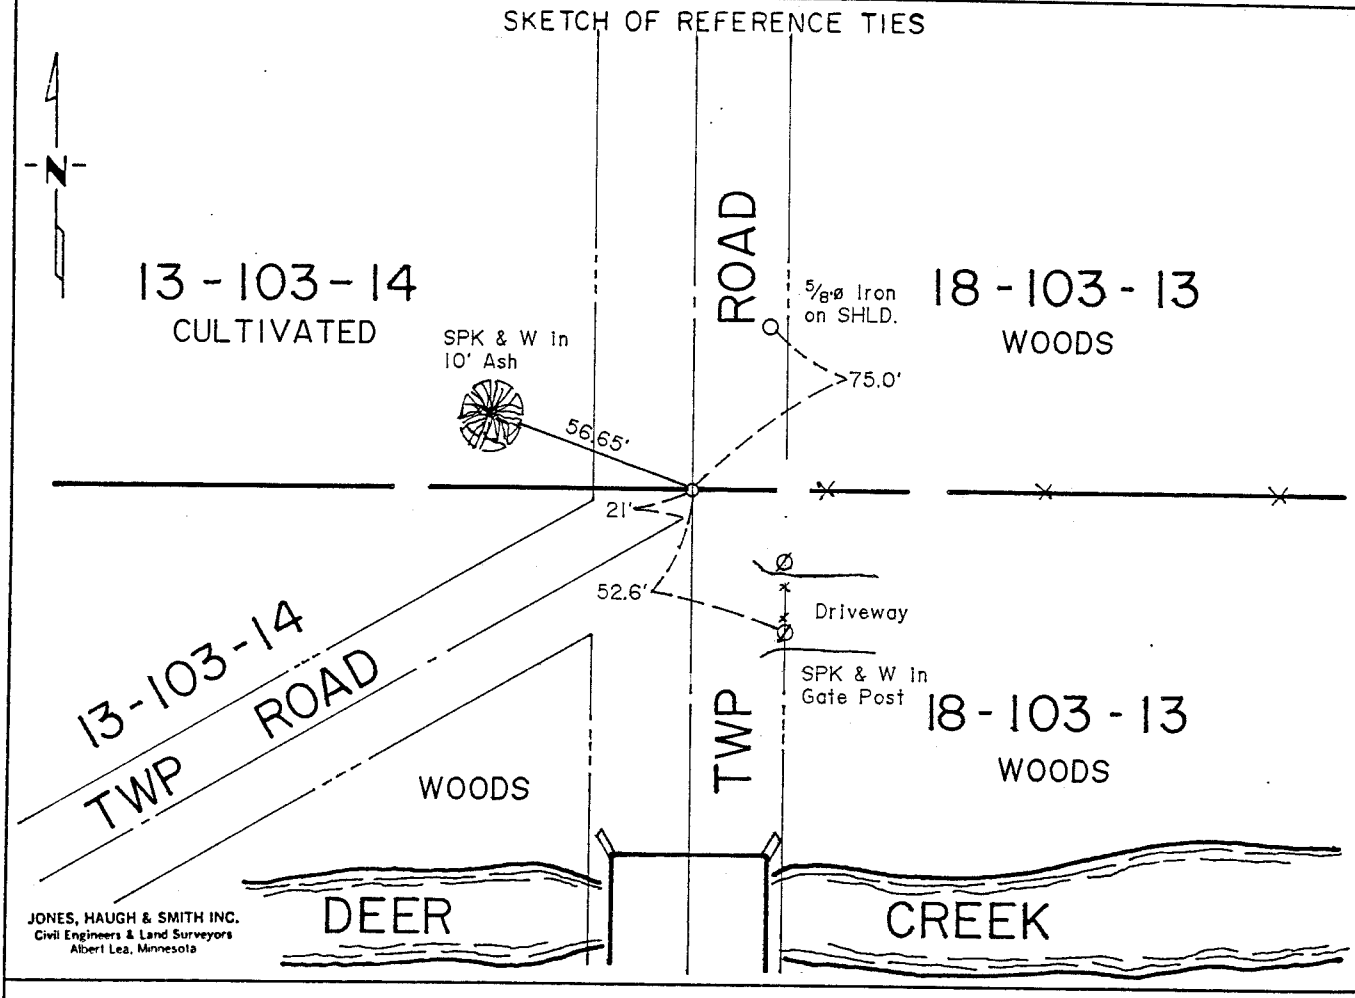

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ SIGNATURE 5-30-91 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Section 13-103-14

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying
Filmore County Surveyor
Minnesota Dept. of Transportation

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1888 Clausen, Mower County Surveyor from 1880-1892, uncovered the Government post during a survey of the NE 1/4 of Section 3.

1981 Filmore County Surveyor David J. Knutson, RLS 10937, found no evidence of Government post or a perpetuation of. Therefore established position of 1/4 corner using occupation and road centerline and set a cast iron monument.

1991 Jones, Haugh & Smith Inc crew uncovered a cast iron monument set by Filmore County Survey in 1981 during a bridge survey L4952 over Deer Creek. Left the monument as found and new ties were taken.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.