Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 12, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/08/1993 (DATE) found a AXLE SHAFT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/08/1993 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

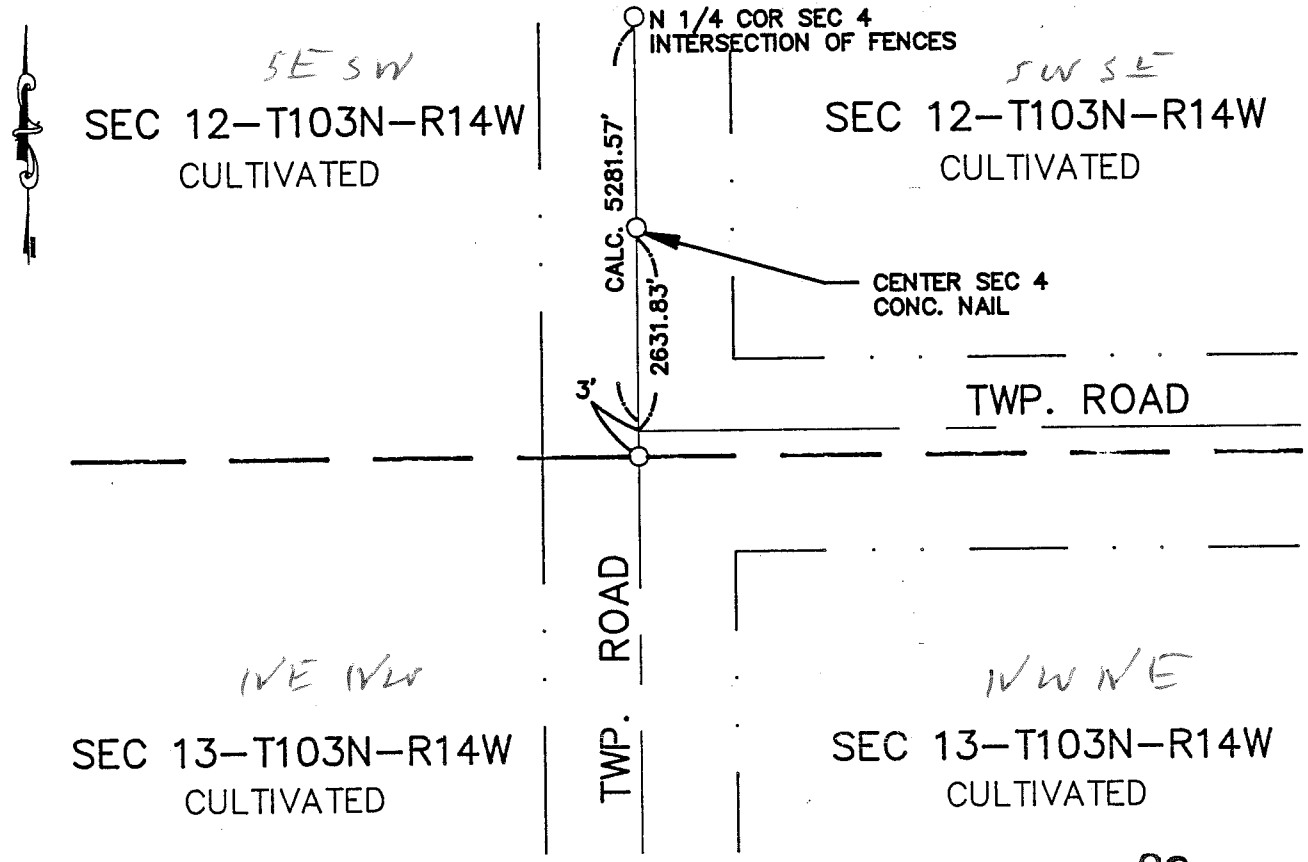

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 42

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-18-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 29 day of July A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Lowe, Deputy

DOCUMENT NO. 454994

M.H.D. FORM NO. 2105

Book 96 Misc Page 42

S 1/4 Cor SEC 12-103-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1993 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe on centerline-centerline of N-S and east township roads, found a 1" axle shaft at a depth of 4.5' and on centerline of N-S road and 3' south of centerline of east road. Shaft was in virgin soil and extended into clay. Accepted shaft as the perpetuation of the original PLS corner and set a cast iron monument near road surface above shaft found.

1994 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located cast iron monument and used it for a survey in the SE 1/4 SW 1/4 section 12-103-14.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.