Index No. P 110 "M."

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 32, Township 103N Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 4-23-92 (DATE) found a 1"ø BOLT ON SOUTH SIDE OF 8"x15" FIELD STONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-23-92 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

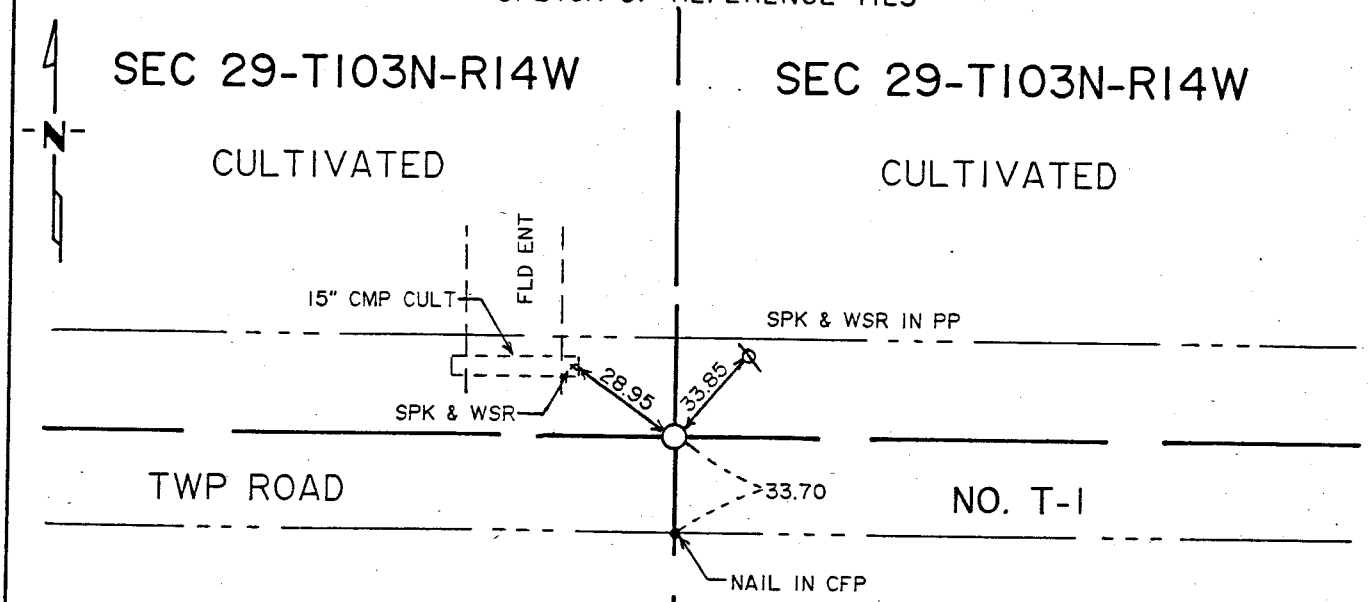

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-15-92 DATE

Registration No. 13907

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Sec 32-103-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following evidence was obtained to support a perpetuation of the original public land survey corner.

1987 Book A in the Office of Mower County Highway Department shows a 1/2" diameter iron pipe capped RLS 13810 (Jerome Schwarz) placed. The following ties were taken:
34.37' N to nail and ribbon in east face of PP
50.74' NE to rail and ribbon in top wooden fence post
33.08' S to nail and ribbon in west face of corner post
Corner is SE of short fence line and on line with most of fence running south

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug with County backhoe on centerline of Township Road T-1 and fence going south. Uncovered a 1" bolt on south side of 8"x15" field stone. Left monument as found and placed public land survey cast iron monument over stone on road surface. Found no evidence of 1/2" diameter capped pipe recorded in Book A.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. P110 "M"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

(N¼) NORTH QUARTER Corner of Section 32, Township 103, Range 19, 5TH P.M.

STATE OF MINNESOTA, County of [redacted] MOWER.


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 6/2/87 (DATE) placed a ½" CAPPED IRON PIPE AT CORNER

SKETCH OF REFERENCE TIES

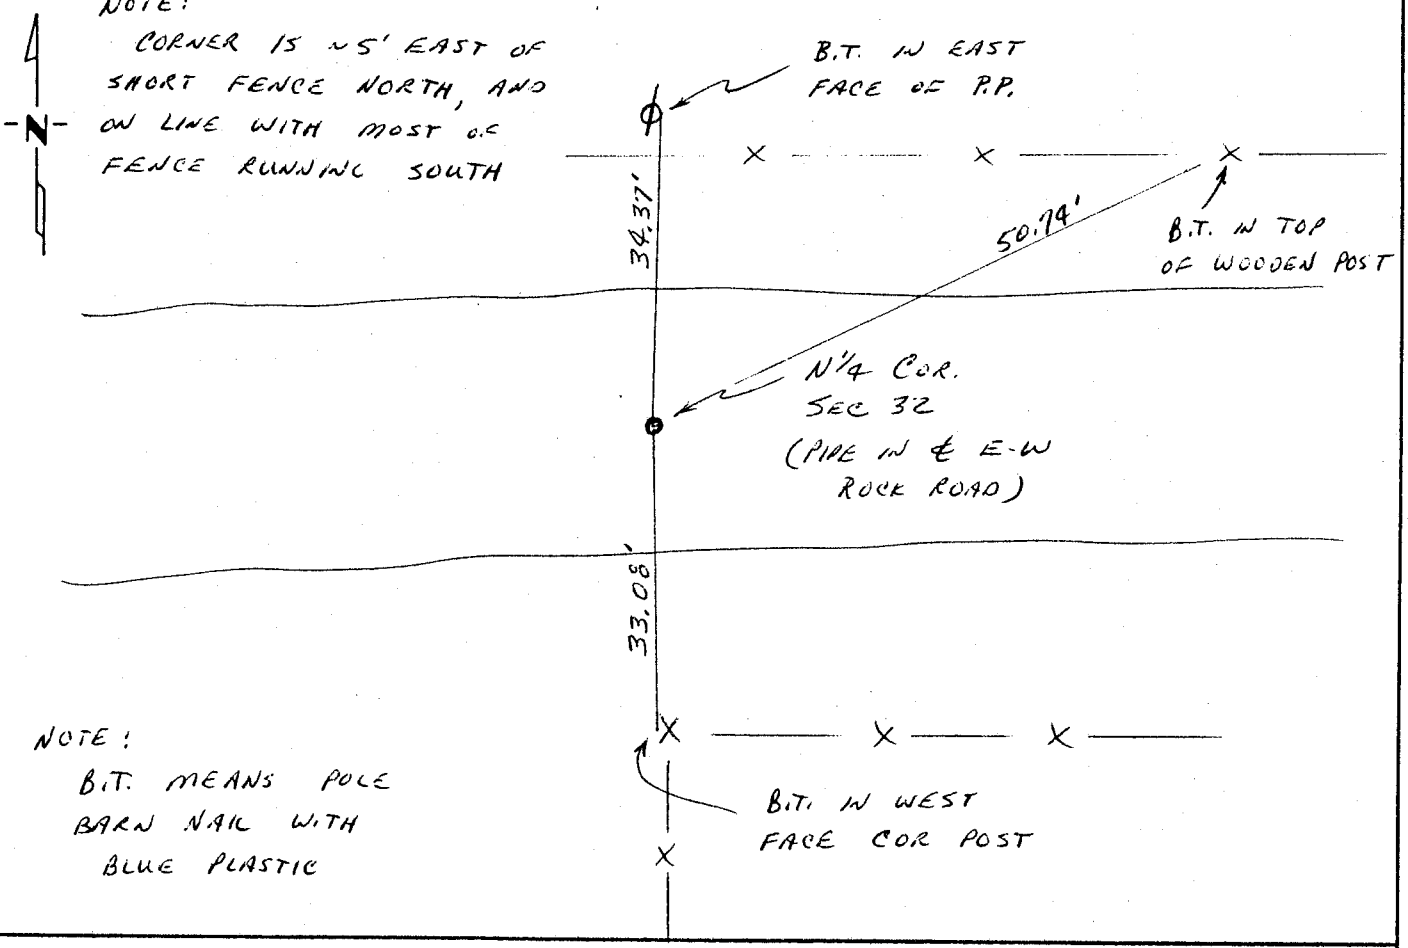

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Jerome R. Schwarz (SIGNATURE) 6/23/87 (DATE)

Registration No. 13810

☒ Land Surveyor,

☐ County Surveyor,

OFFICE OF THE COUNTY RECORDER
County of Fillmore

I hereby certify that this document was filed in the Recorder's office at _____ .M. on the _____ day of _____ A.D., 19___

Co. Recorder _____

By _____, Deputy

DOCUMENT NO. _____