Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 34, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/01/1997 (DATE) found a 1/2" IRON CEMENTED IN 6" TILE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/01/1997 (DATE) placed a CAPPED 5/8" IRON

SKETCH OF REFERENCE TIES

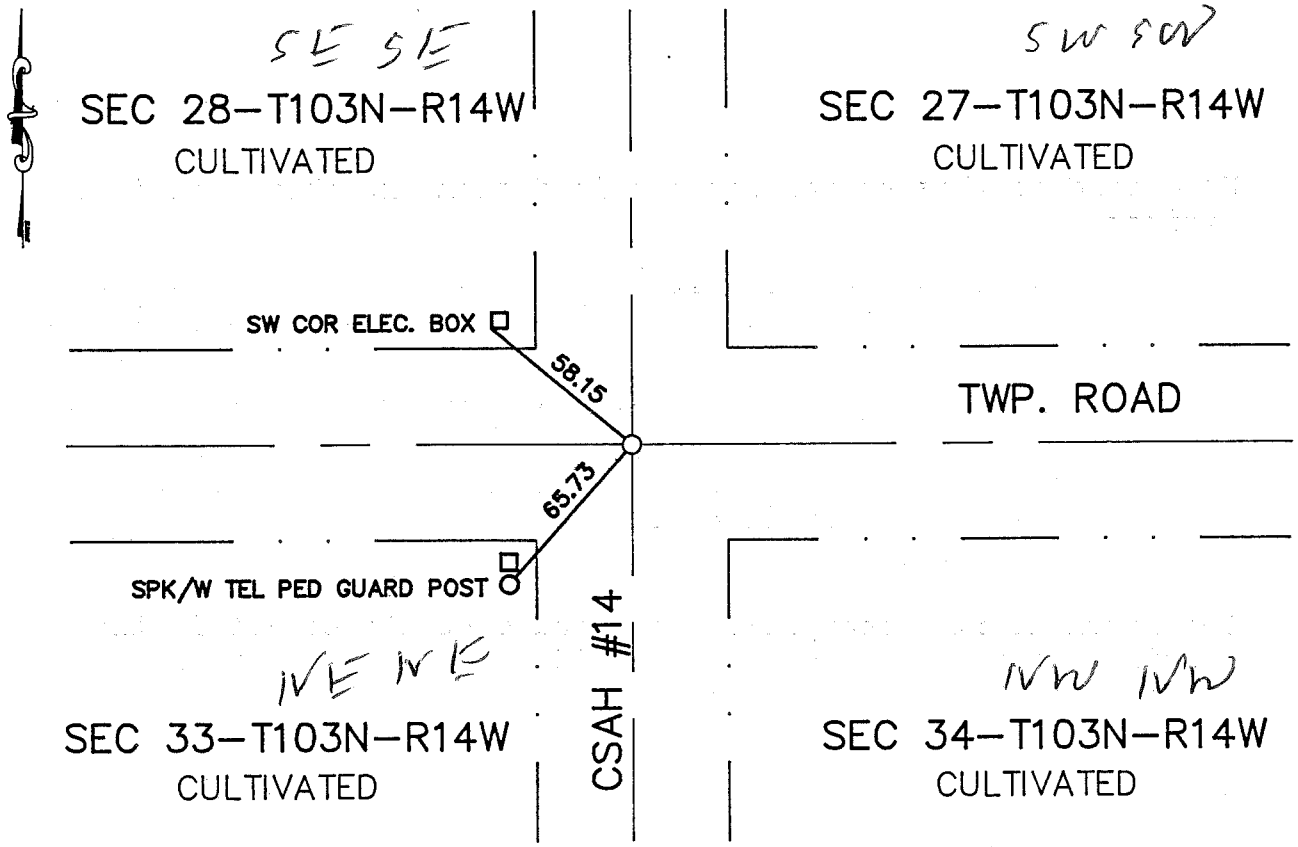

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-9-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 14th day of Oct A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Lauer, Deputy

DOCUMENT NO. 456838

M.H.D. FORM NO. 2105

ECCUK 96 PAGE 482

Book 96 Misc Page 482 HS

NW Cor SEC 34-103-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the county backhoe at the intersection of township road E-W and CSAH No. 14. Uncovered a 6" tile with a 1/2" iron cemented in tile. Also found wood stakes on the north and south side of tile sitting over stone. Placed a 5/8" iron capped 13807 on the north side of tile monument. Placed a 5/8" iron capped 13807 over tile monument found 0.4' below road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.