Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 1, Township 103N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 3-11-91 (DATE) found a ½"ø iron in 6"ø concrete monument 1.0' below road surface.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3-11-91 (DATE) placed a CAST IRON MONUMENT AT ROAD SURFACE OVER CONCRETE MONUMENT FOUND.

SKETCH OF REFERENCE TIES

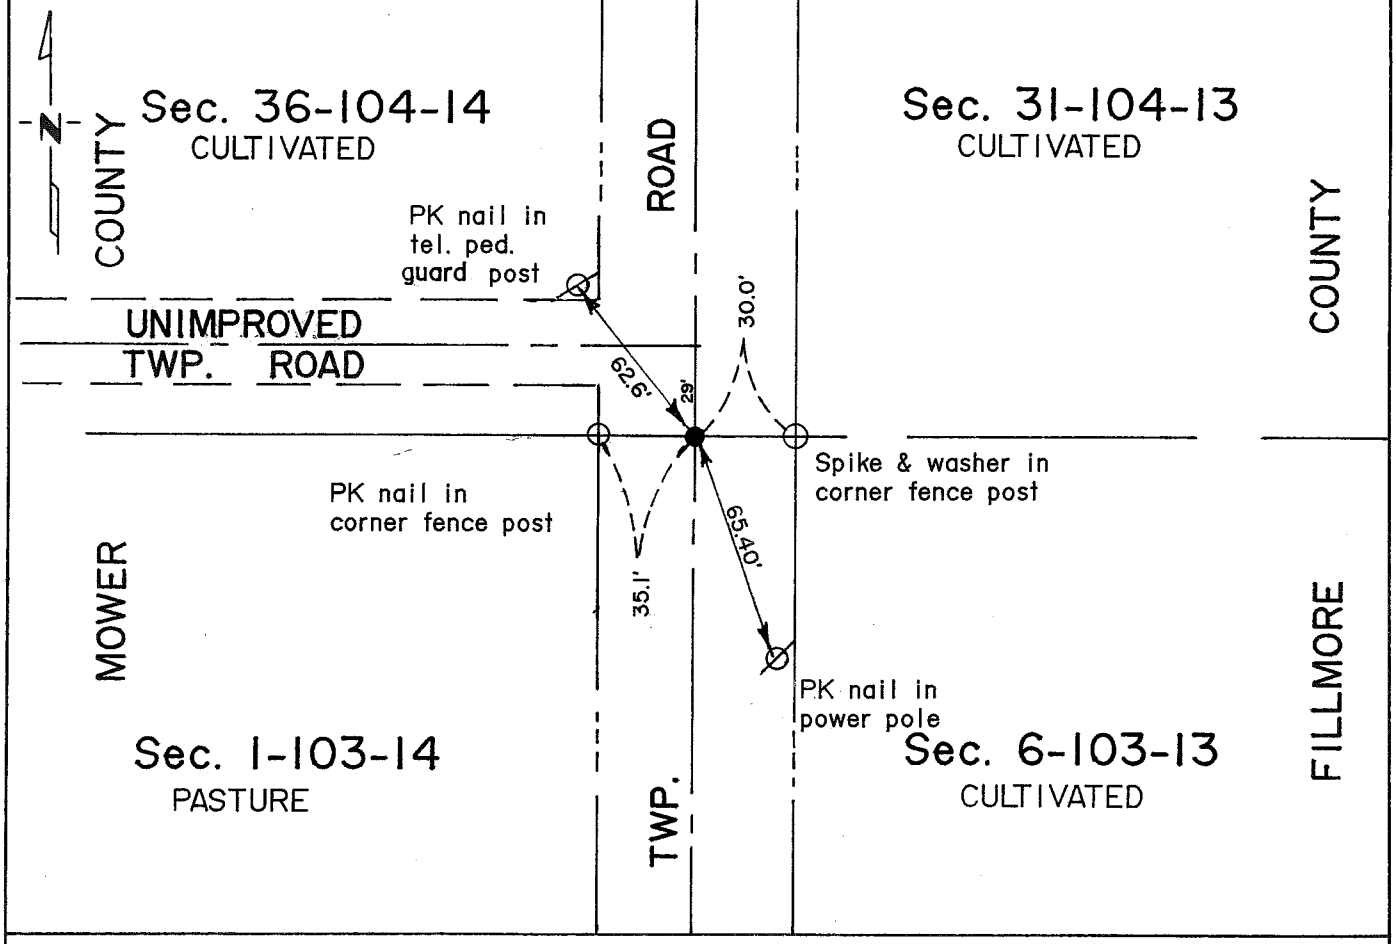


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] (SIGNATURE) 4-3-91 (DATE)

Registration No. 13907

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE cor Sec 1-103-14

1853 John Ball, Deputy Surveyor set a post for corner during the original public land survey.

1910 Irving Bacon set a concrete monument with an iron rod in the center.

1955 Mower County Highway Department uncovered concrete monument and ties were taken and recorded in 'Book A' in the Office of the Mower County Engineer.

1974 Fillmore County Surveyor found a rotted wooden stake from an 1"x2" hub above a concrete monument with an iron rod in the center and accepted it as the perpetuation of the original government corner.

1991 Jones, Haugh & Smith Inc personnel uncovered a 1/2" diameter iron in a 6" diameter concrete monument 1.0 feet below the road surface. Left the monument as found.

The monument found fits occupation and road centerlines and is accepted as best evidence of a perpetuation of the original public land survey corner. Placed a cast iron monument at road surface over concrete monument found.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 2, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/13/1995 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/13/1995 (DATE) placed a 1/2" IRON PIPE

SKETCH OF REFERENCE TIES

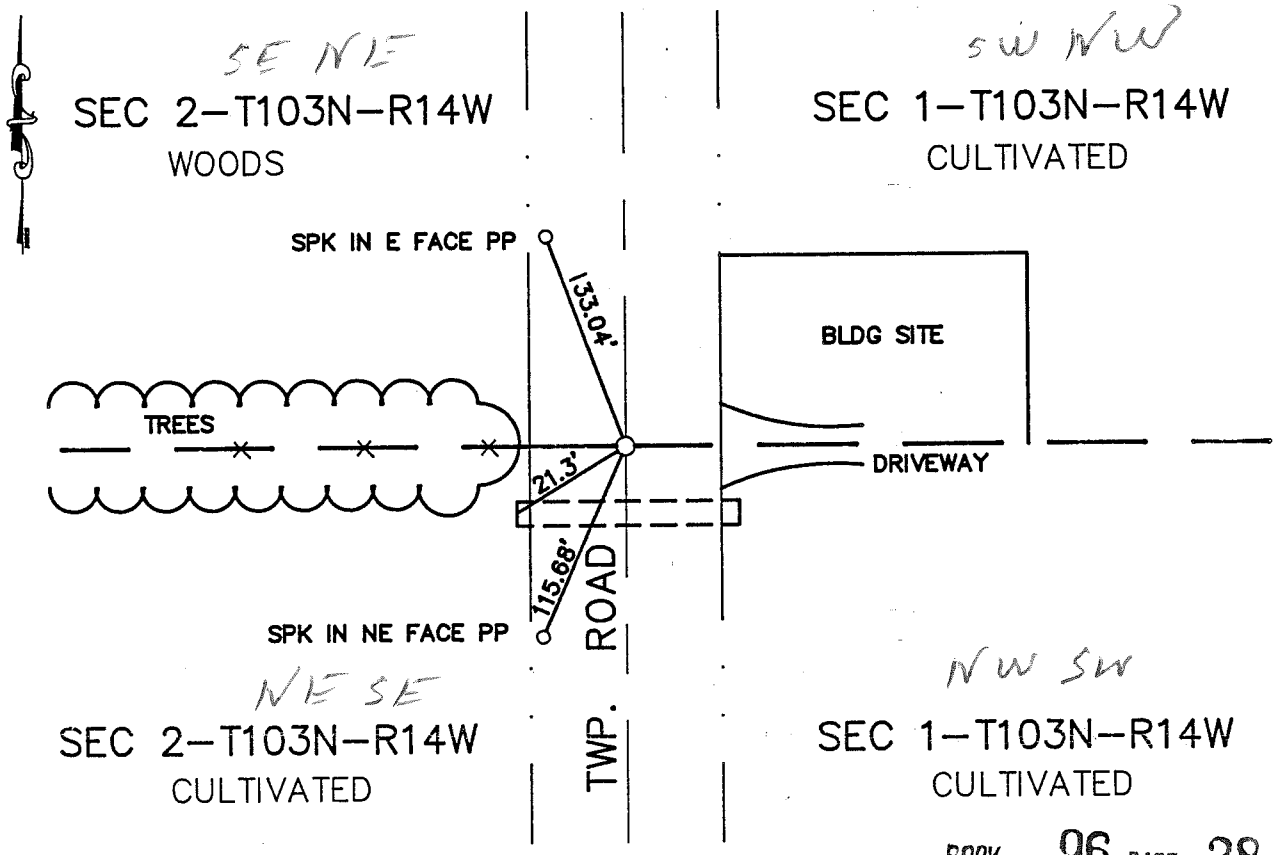


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 38

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] 7-18-97
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2p .M. on the 29 day of July A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 454992

M.H.D. FORM NO. 2105

Book 96 Misc Page 38

E 1/4 Cor SEC 2-103-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe on centerline of road and in line with fence west. Dug an 8'x8'x2.5' hole and found all rock, and could not dig deeper with backhoe. Found no evidence of PLS corner at this point.

1995 Jerome Schwarz set 1/2" iron pipe down 0.25' below road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 3, Township 103 Range 14, 5th P.M.


STATE OF MINNESOTA, County of MOWER

At the corner location shown on the sketch

☐ On – (DATE) found a – left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/02/04 placed a COMPUTED POSITION

SKETCH OF REFERENCE TIES

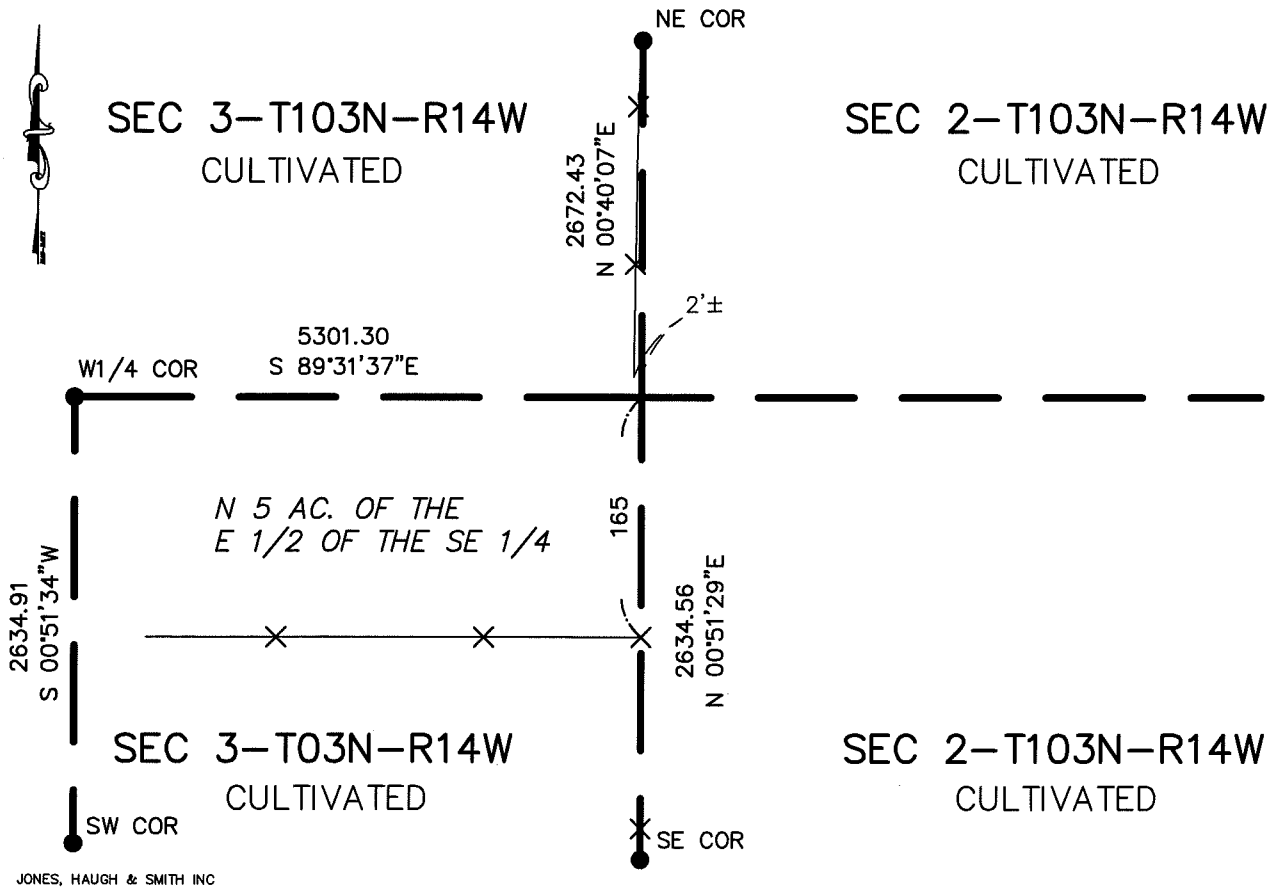


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-12-05

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

E 1/4 Corner Section 3-T103N-R14W

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853 . The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, traversed around section locating occupation and other section information. This information was used to compute a location for this quarter corner. Using the computed location and existing occupation near the subject corner a search was done and no evidence of the corner was found. Computed location which is in agreement with the relevant section information and occupation lines.

The monument set is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 3, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/02/2004 (DATE) found a 1/2" IRON AND FIELD STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/09/2004 (DATE) placed a 5/8"X16" REBAR WITH CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

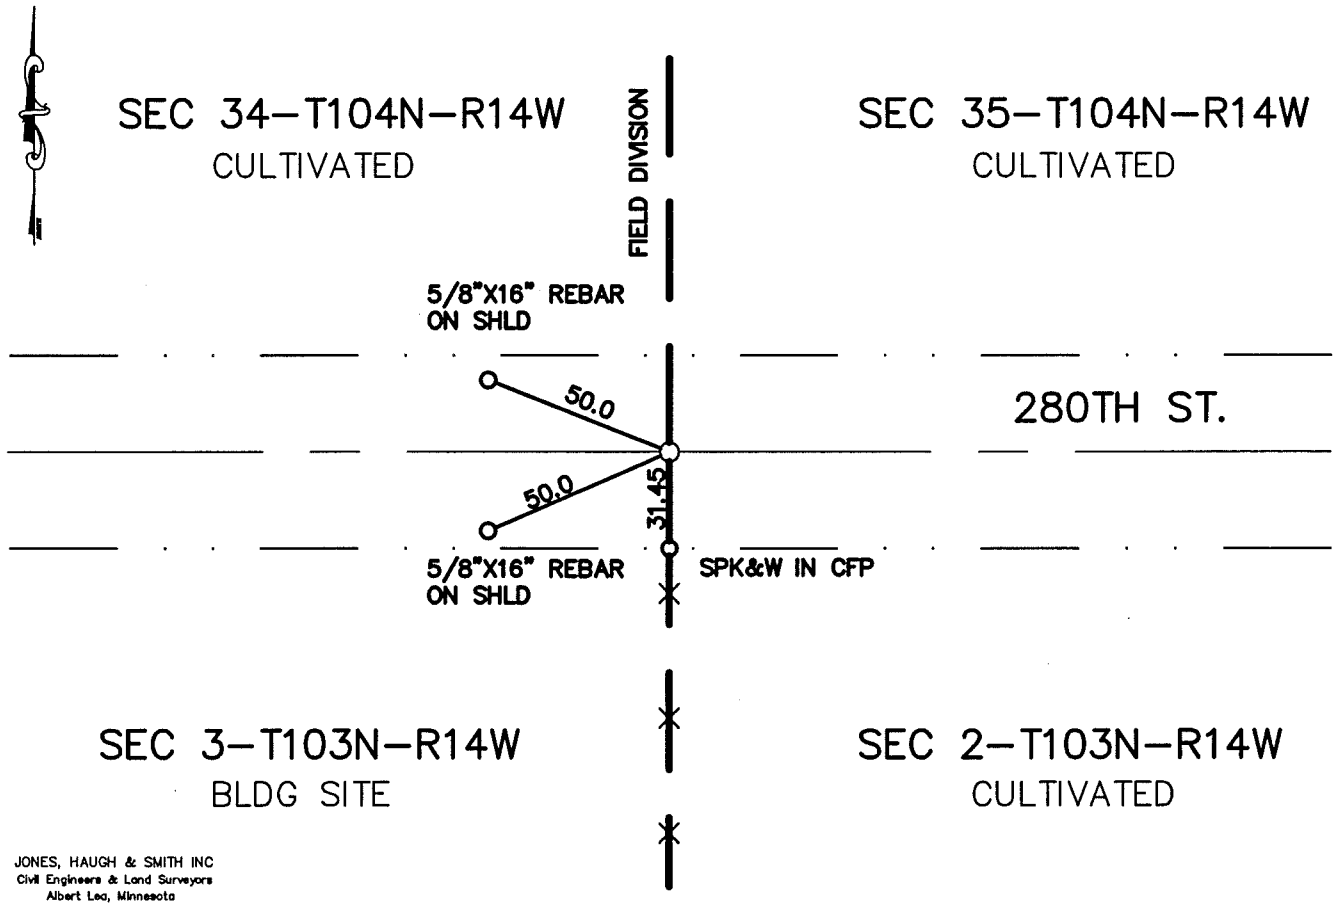


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 8-30-04
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NE Corner Section 3-T103N-R14W

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand and found a 1/2" iron pipe with a scarred cap 0.3' below road surface.

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Boe Brothers backhoe at the location of pipe and found a field stone. Left monument as found and placed a 5/8"x16" rebar with cast iron monument above 0.6' below road surface.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 3, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/02/2004 (DATE) found a 3/4" IRON PIPE CAPPED 13810

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/09/2004 (DATE) placed a 5/8"X16" REBAR WITH CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

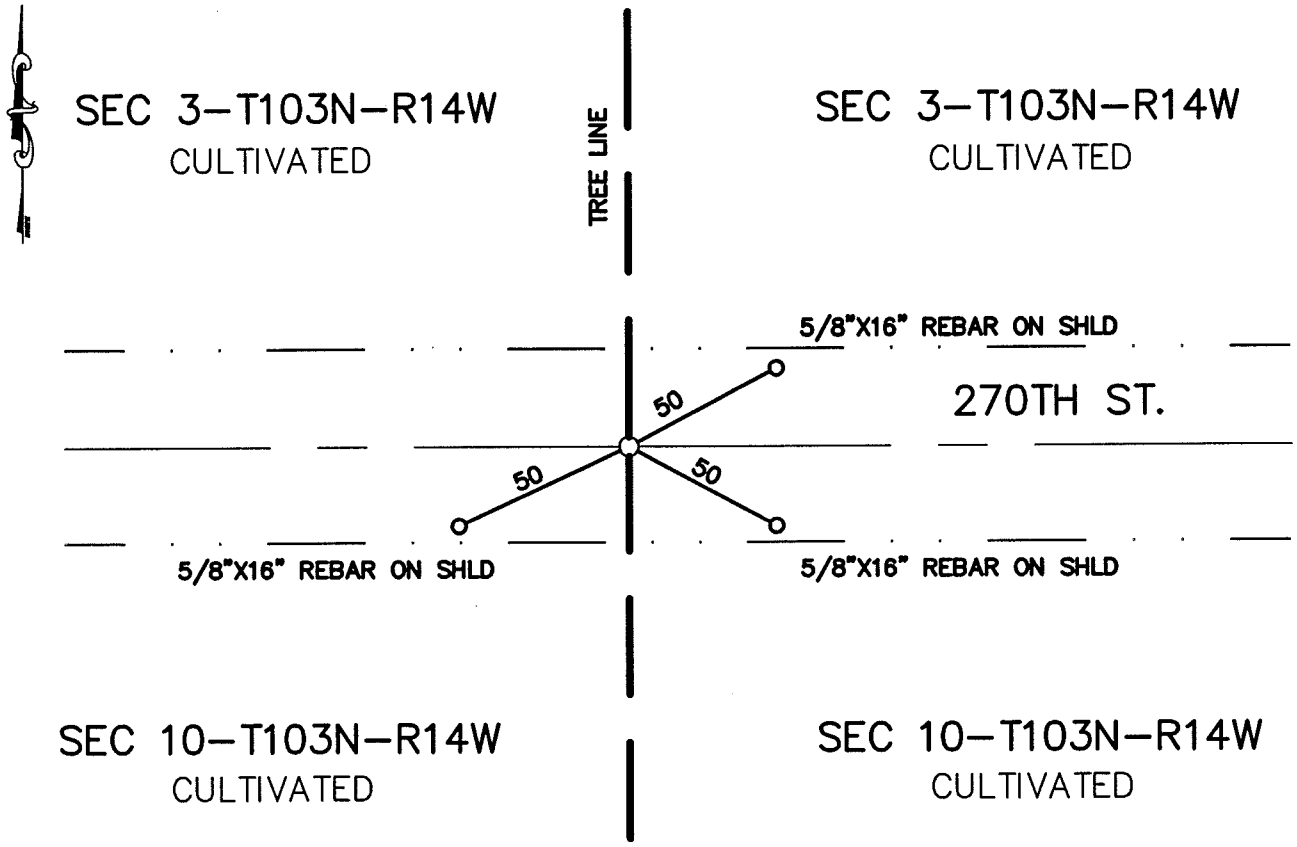


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 9-30-04 (DATE)

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

S 1/4 Corner Section 3-T103N-R14W

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand and found a ¾" iron pipe capped #13810 0.3' below road surface.

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Boe Brothers backhoe at the location of found pipe capped 13810. No other evidence of the original PLS corner was found. Reset the found pipe and placed a 5/8"x16" rebar with cast iron monument above 0.6' below road surface.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 3, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 01/16/2003 (DATE) found a 3/4"X8" PIPE WITH CAP (SCARRED)

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/09/2004 (DATE) placed a 5/8"X16" REBAR WITH CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

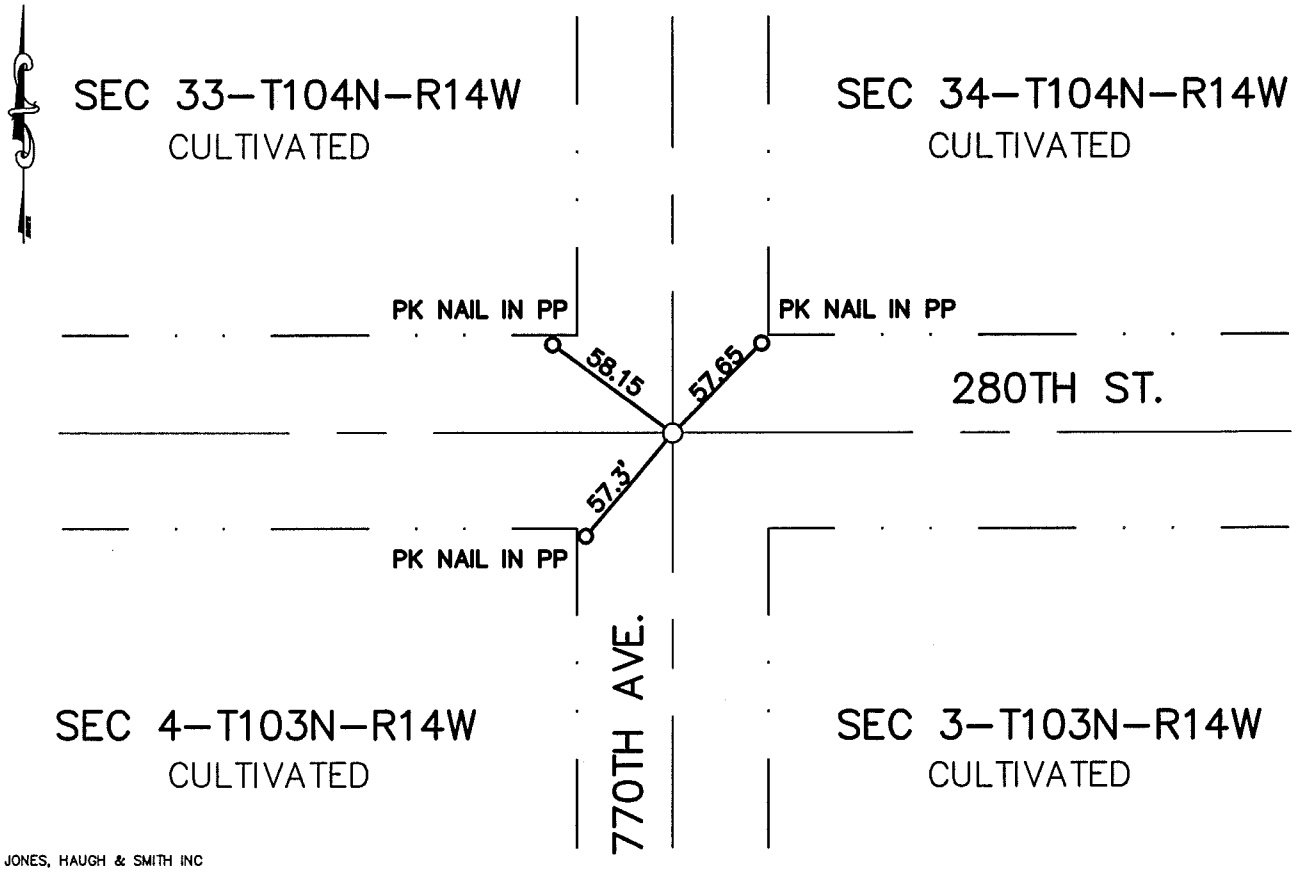


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 9-30-04 (DATE)

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NW Corner Section 3-T103N-R14W

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853 . The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand and found a ¾" iron pipe with a scarred cap.

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Boe Brothers backhoe next to found pipe and found no other evidence of the original PLS corner. Replaced the pipe and set a 5/8"x16" rebar with cast iron monument above pipes found 0.6' below road surface.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 3, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/02/2004 (DATE) found a 3/4" IRON PIPE WITH A SCARRED CAP

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/09/2004 (DATE) placed a 5/8"X16" REBAR WITH CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

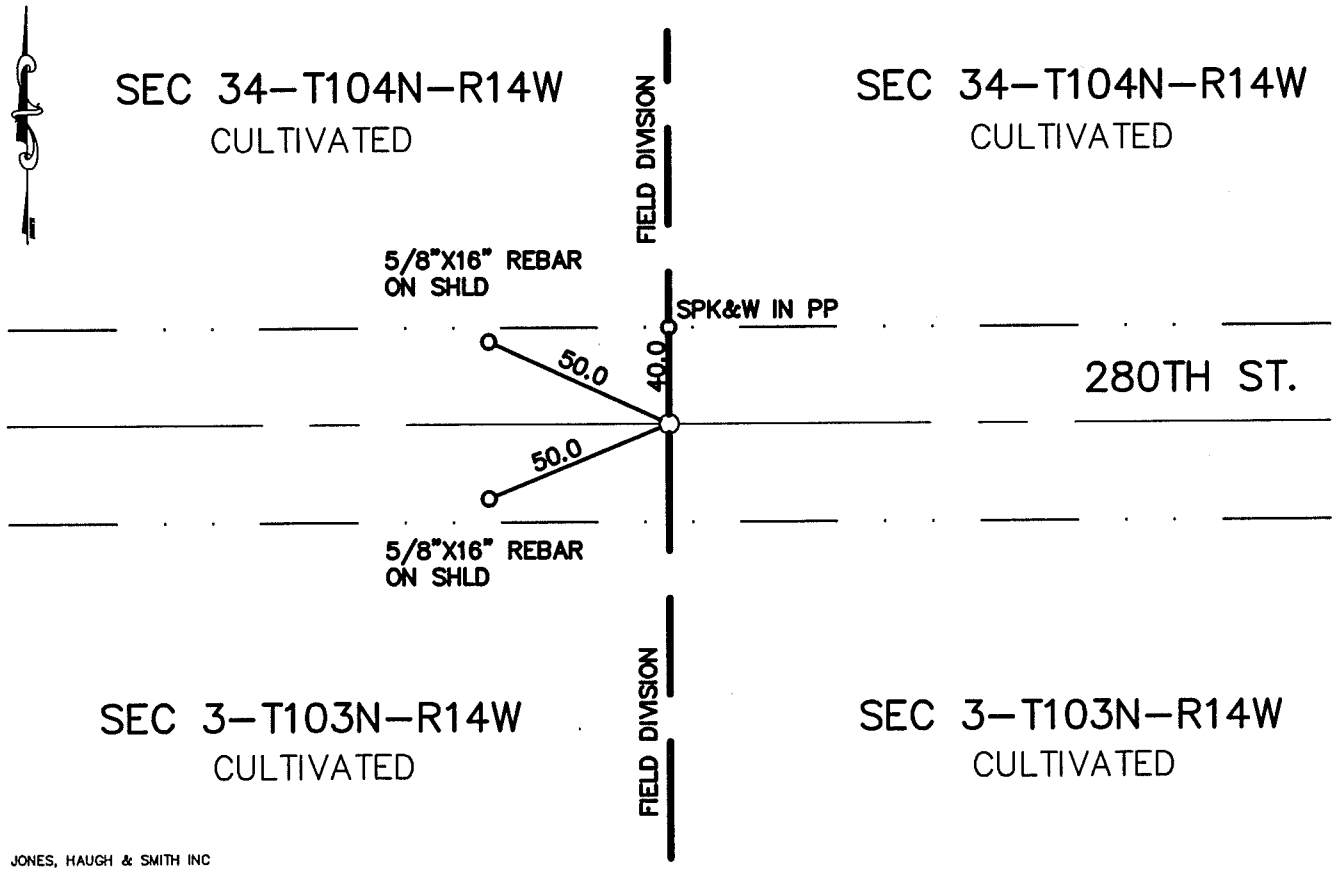


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 9-30-04 (DATE)

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

N 1/4 Corner Section 3-T103N-R14W

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand and found a ¾" iron pipe with a scarred cap 0.3' below road surface.

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Boe Brothers backhoe at the location of ¾" pipe found no other evidence of the original PLS corner. Reset the found pipe 2.5' below road surface and placed a 5/8"x16" rebar with cast iron monument above 0.6' below road surface.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 3, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/02/2004 (DATE) found a 3/4" PIPE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/09/2004 (DATE) placed a 5/8"X16" REBAR WITH CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

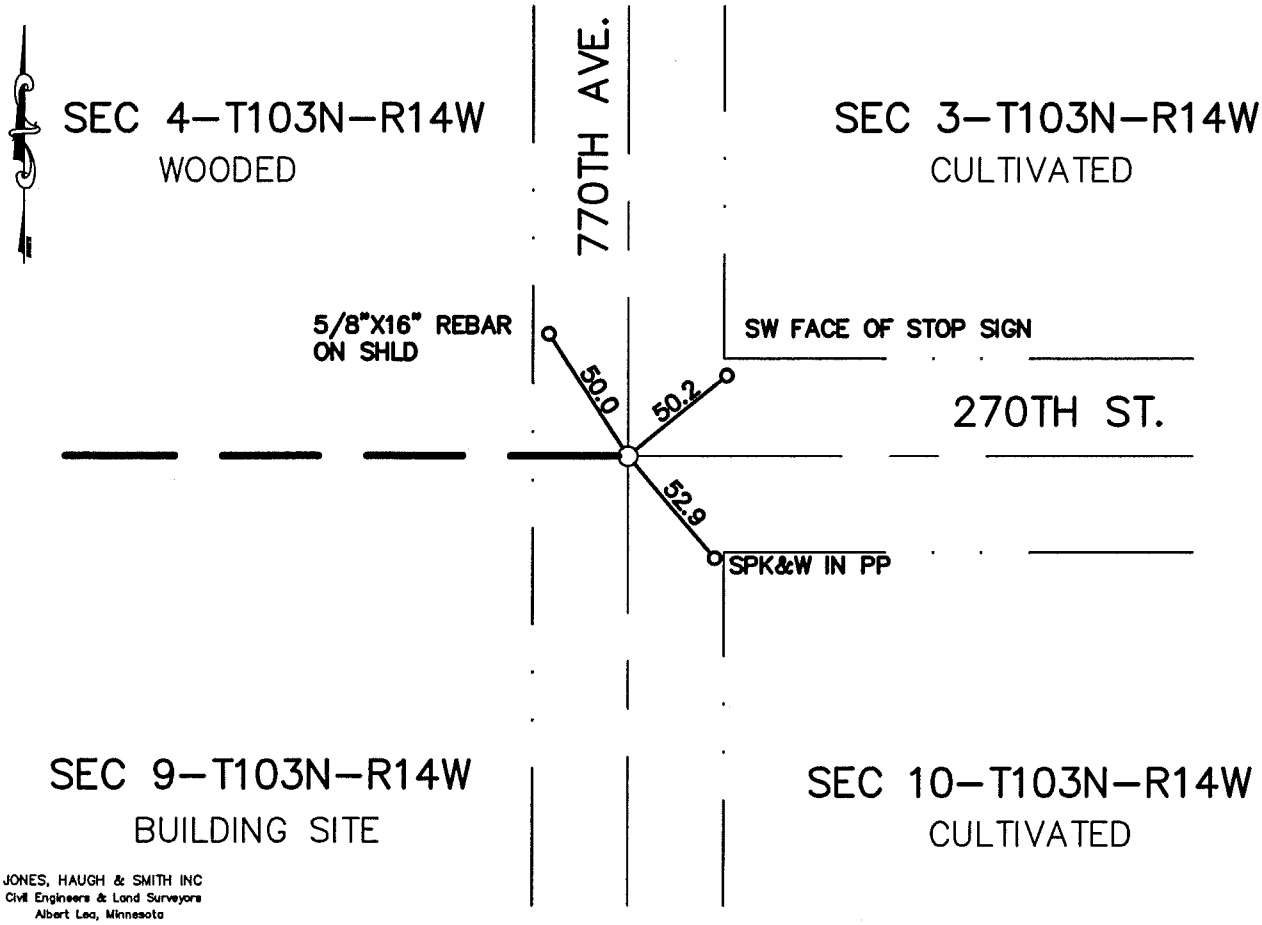


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 6-30-04 (DATE)

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SW Corner Section 3-T103N-R14W

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand and found a ¾" rebar 0.3' below road surface.

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Boe Brothers backhoe at the location of ¾" rebar of found no other evidence of the original PLS corner. Reset the found ¾" rebar 2.5' below road surface and placed a 5/8"x16" rebar with cast iron monument above 0.6' below road surface.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 4, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 01/16/2003 (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/09/2004 (DATE) placed a 5/8"X16" REBAR WITH CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

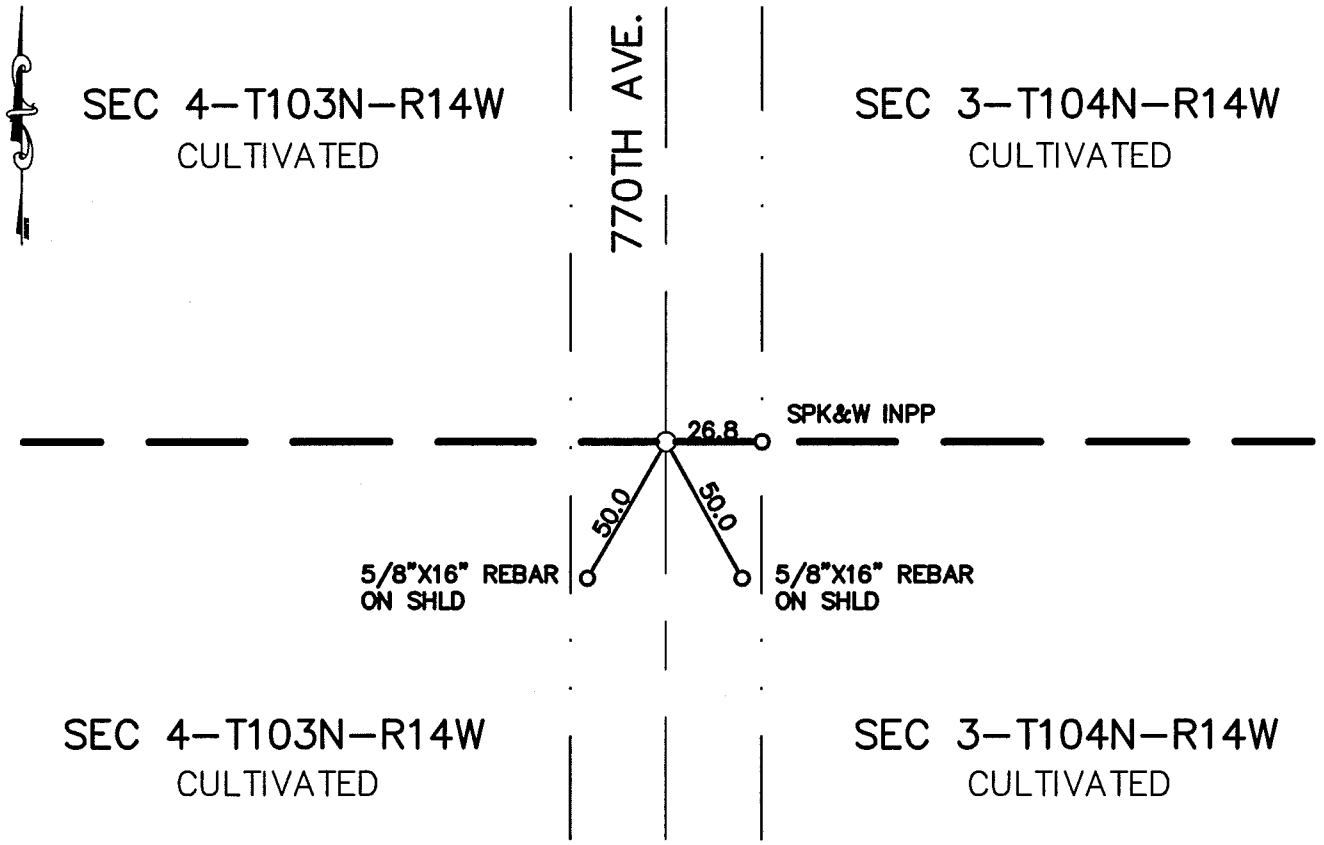


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 9-30-04 (DATE)

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

E 1/4 Corner Section 4-T103N-R14W

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand and found a ¾" rebar 0.3' below road surface.

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Boe Brothers backhoe at the location of pipe and found no other evidence of the original PLS corner. Reset the found pipe 2.5' below road surface and placed a 5/8"x16" rebar with cast iron monument above 0.6' below road surface.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. "I" P.17

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 4, Township 103, Range 19, 5TH P.M.

STATE OF MINNESOTA, County of [redacted]. MOWER.


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3/4/88 (DATE) placed a 1/2" IRON PIPE, WITH REG. NO. 13810 ON CAP, AS THE CORNER

## SKETCH OF REFERENCE TIES

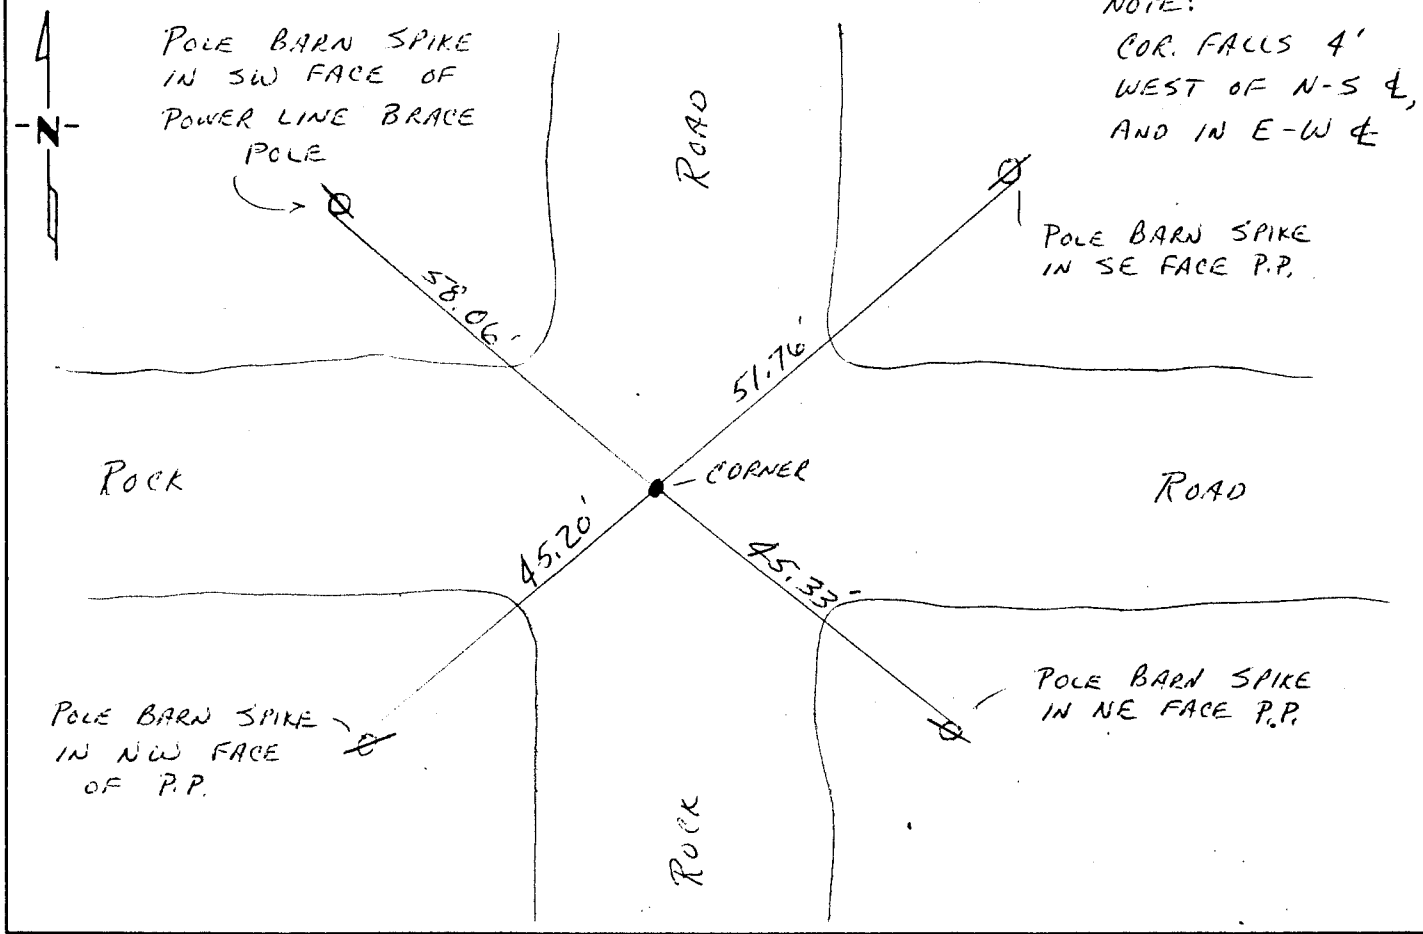


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William R. Schwartz (SIGNATURE) 3/8/88 (DATE)

Registration No. 13810

☒ Land Surveyor,

☐ County Surveyor,

OFFICE OF THE COUNTY RECORDER
County of Fillmore

I hereby certify that this document was filed in the Recorder's office at _____ .M. on the _____ day of _____ A.D., 19__

Co. Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Index No. "K" P17

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 4, Township 103, Range 19, 5TH P.M.

STATE OF MINNESOTA, County of [redacted]. MOWER.


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3/9/88 (DATE) placed a 1/2" IRON PIPE, WITH REG. NO. 13810 ON CAP, AS THE CORNER

## SKETCH OF REFERENCE TIES

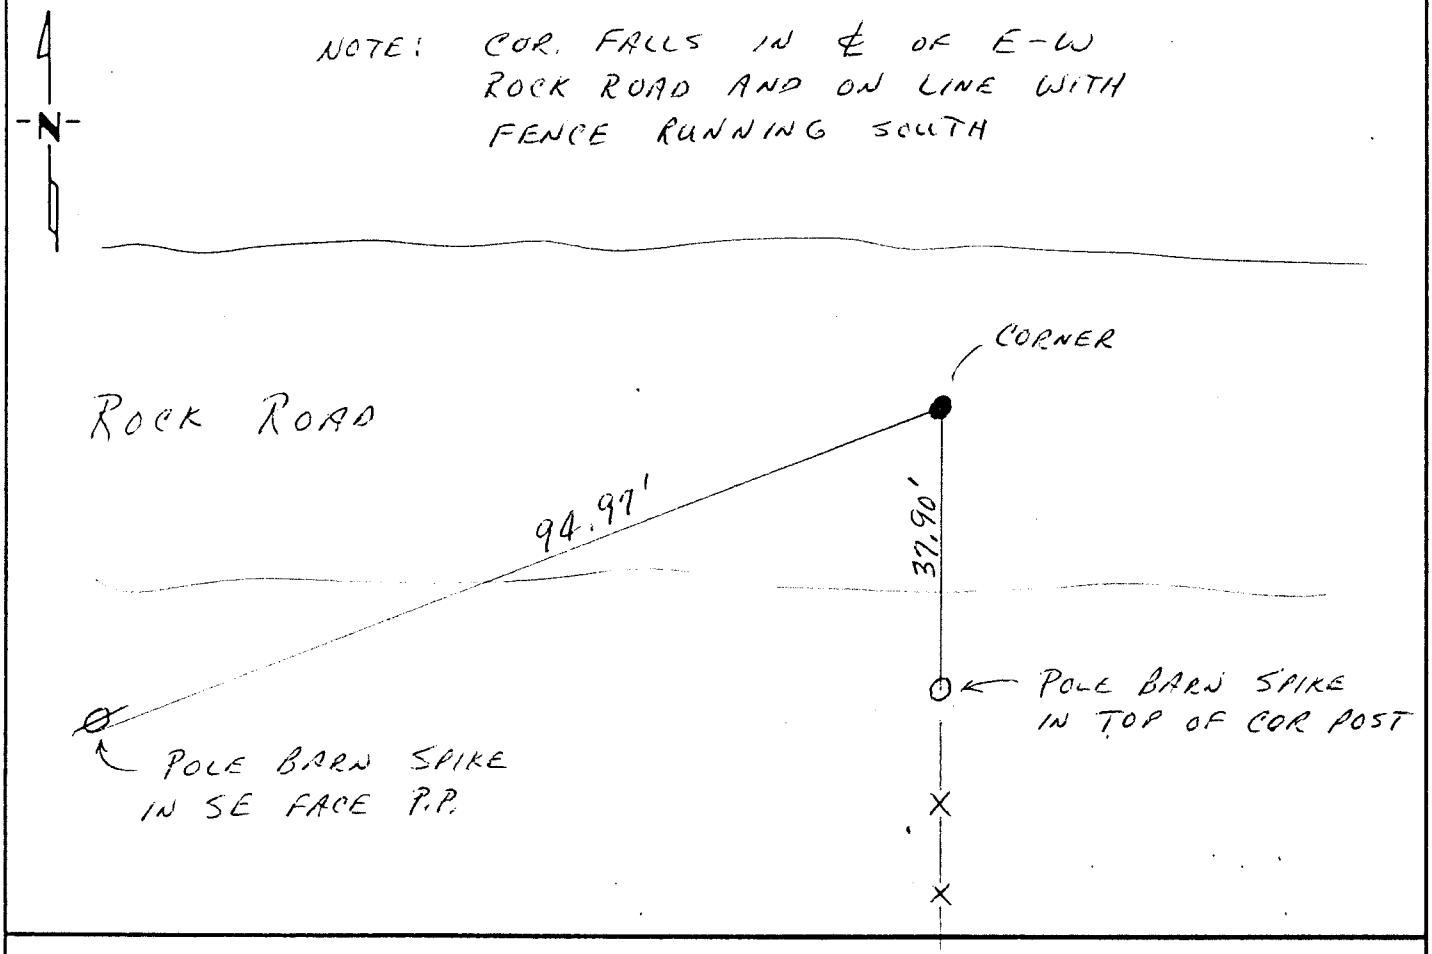


**Statement of evidence relative to this corner location is on back of page.**

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Jerome R. Schwarz (SIGNATURE) 3/8/88 (DATE)

Registration No. 13810

☒ Land Surveyor,

☐ County Surveyor,

OFFICE OF THE COUNTY RECORDER
County of Fillmore

I hereby certify that this document was filed in the Recorder's office at _____ .M. on the _____ day of _____ A.D., 19__

Co. Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Index No. "P" P 17

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 4, Township 103, Range 19, 5TH P.M.

STATE OF MINNESOTA, County of [redacted] MOWER.


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3/9-/88 (DATE) placed a 1/2" IRON PIPE, WITH REG. NO. 13810 ON CAP, AS THE CORNER

## SKETCH OF REFERENCE TIES

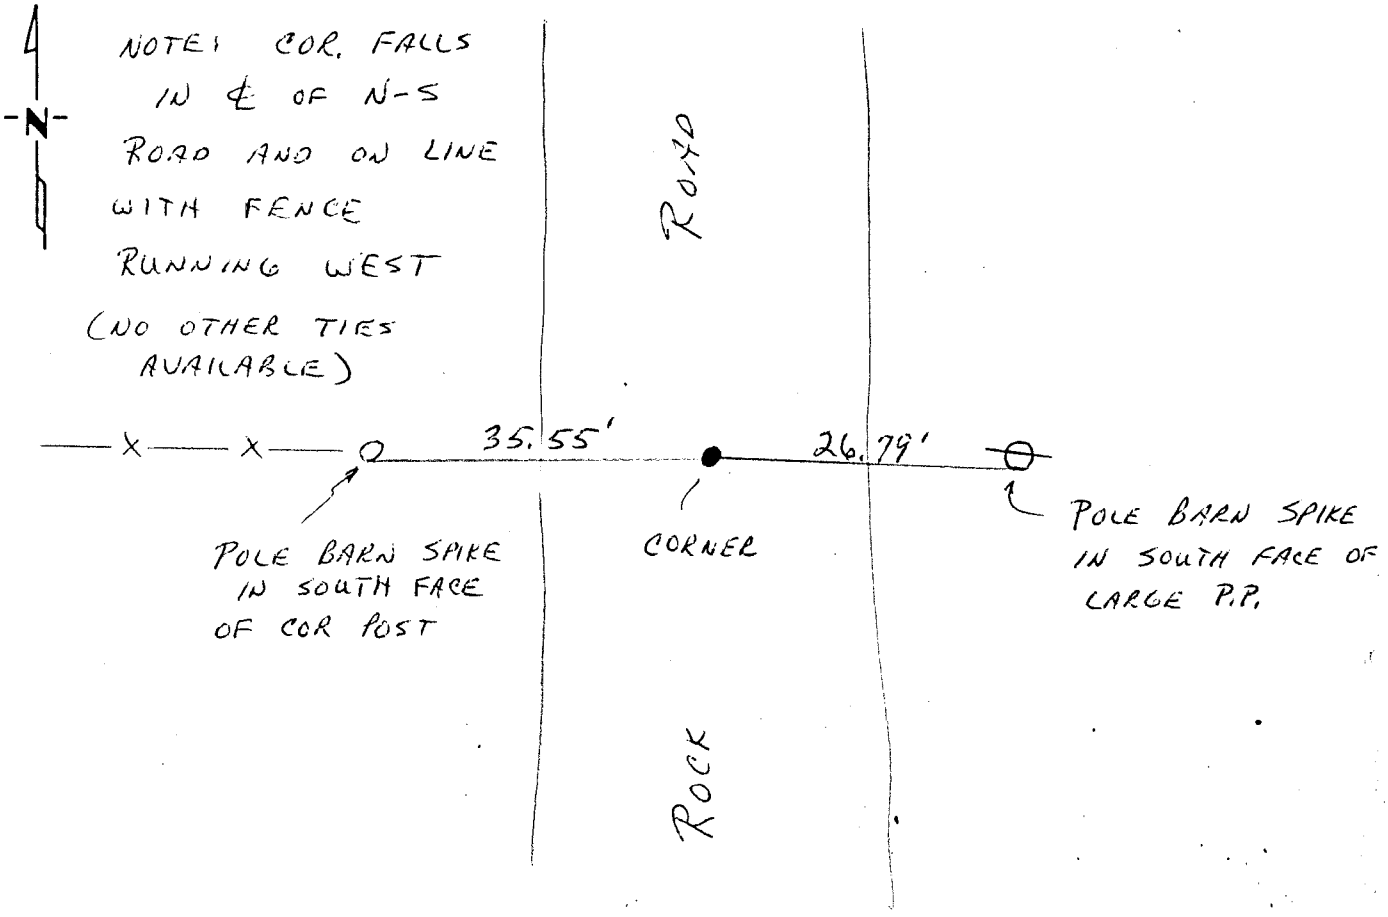


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Jerome R. Schwartz (SIGNATURE) 3/8/88 (DATE)

Registration No. 13810

☒ Land Surveyor,

☐ County Surveyor,

OFFICE OF THE COUNTY RECORDER
County of Fillmore

I hereby certify that this document was filed in the Recorder's office at _____ .M. on the _____ day of _____ A.D., 19___

Co. Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Index No. "L" P.17

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 5, Township 103, Range 14, 5TH P.M.

STATE OF MINNESOTA, County of [redacted]. MOWER.


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3/4/88 (DATE) placed a 1/2" IRON PIPE, WITH REG. NO. 13810 ON CAP, AS THE CORNER

## SKETCH OF REFERENCE TIES

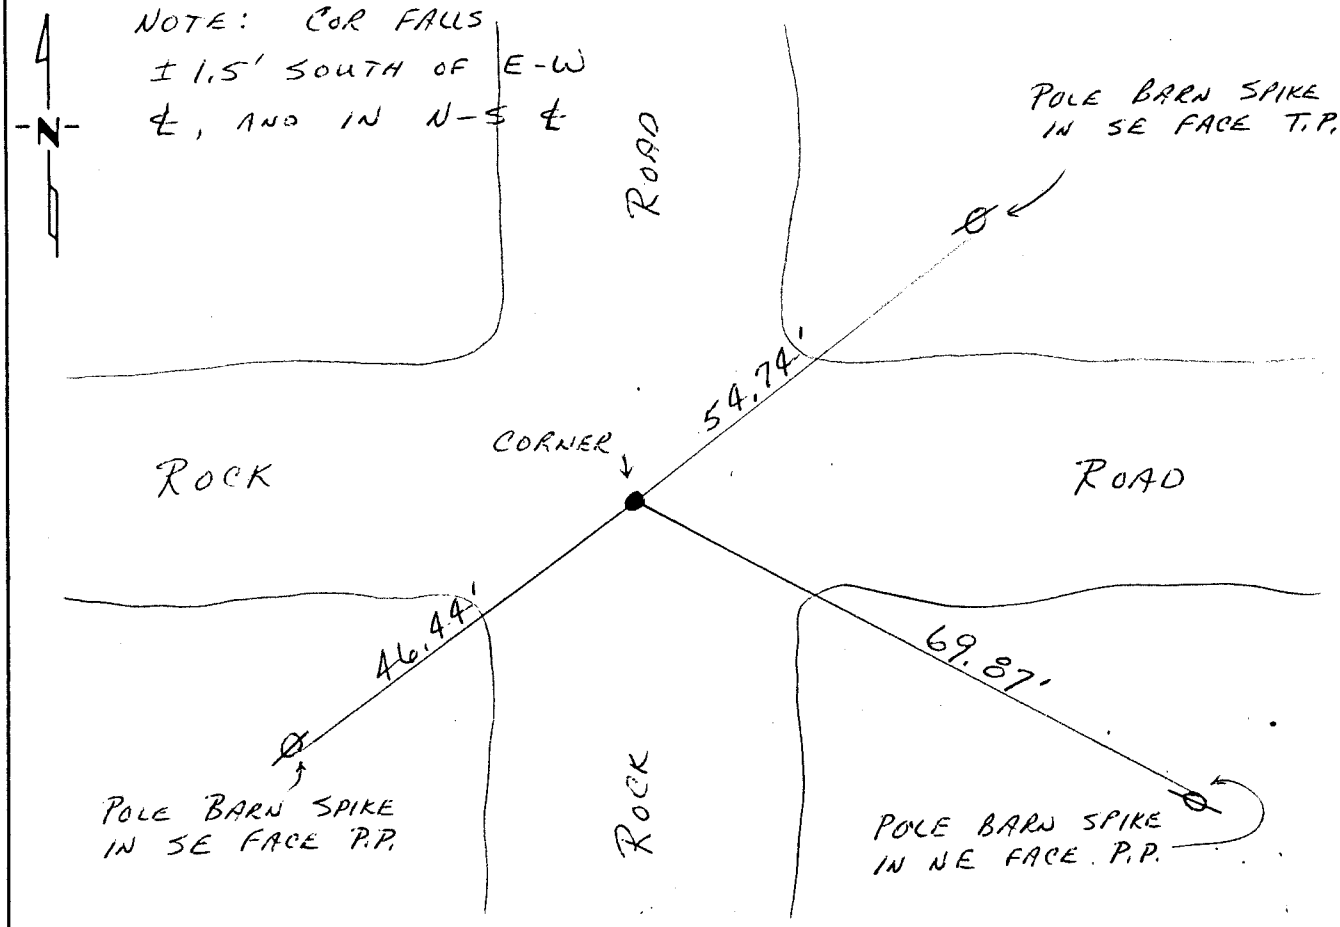


**Statement of evidence relative to this corner location is on back of page.**

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Jerome R. Schwarz (SIGNATURE) 3/8/88 (DATE)

Registration No. 13810

☒ Land Surveyor,

☐ County Surveyor,

OFFICE OF THE COUNTY RECORDER
County of Fillmore

I hereby certify that this document was filed in the Recorder's office at _____ .M. on the _____ day of _____ A.D., 19__

Co. Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Index No. "M" p17

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 5, Township 103, Range 14, 5TH P.M.

STATE OF MINNESOTA, County of ~~FILLMORE~~ MOWER.


At the corner location shown on the sketch:

☒ On 3/1/88 (DATE) found a 1/2" IRON PIPE WITH REG. NO. 15229 AND ACCEPTED AS THE CORNER

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

## SKETCH OF REFERENCE TIES

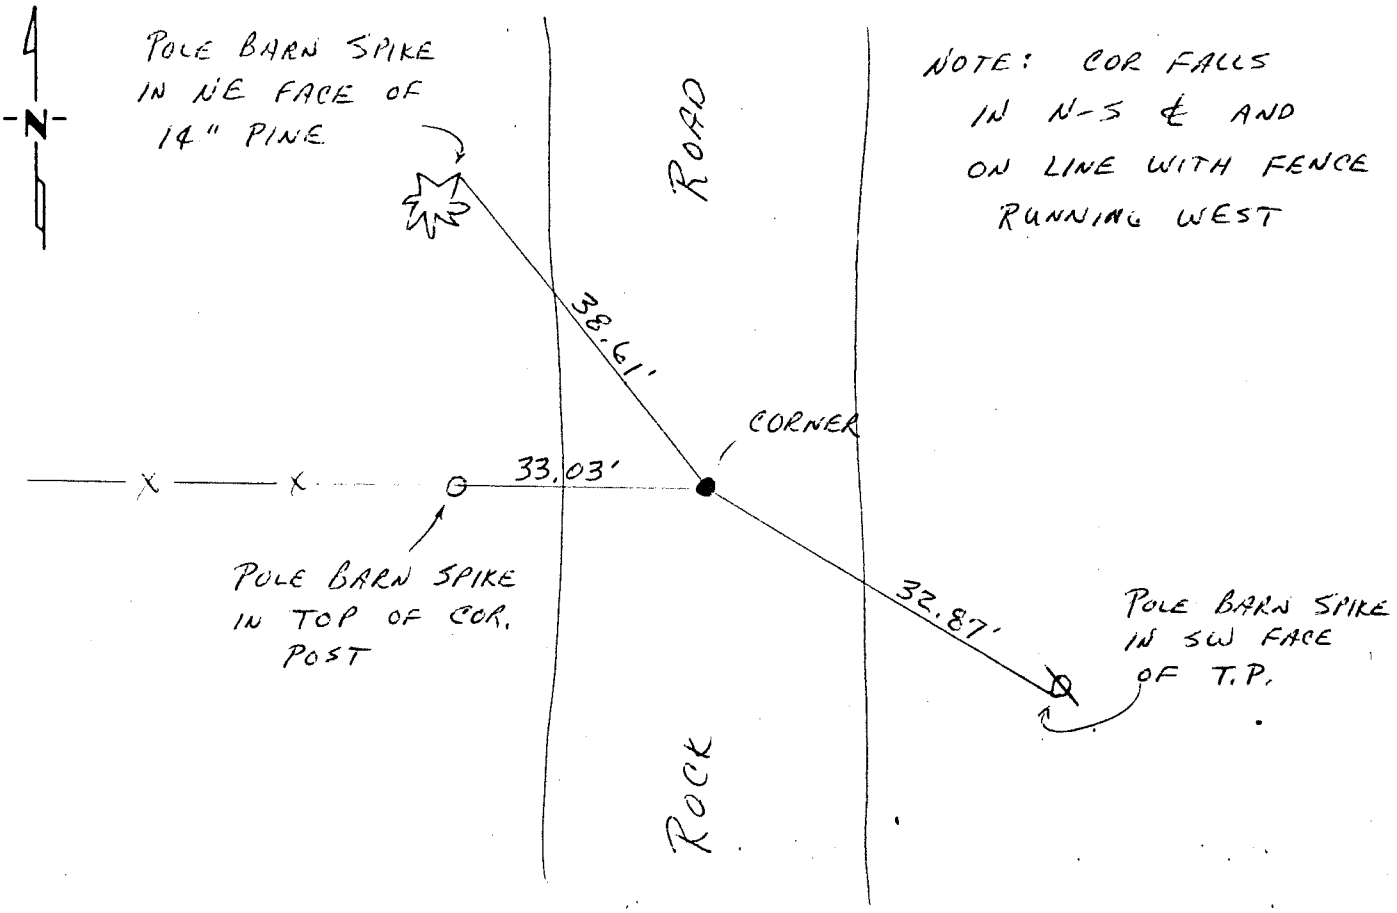


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Jerome R. Schwartz (SIGNATURE) 3/8/88 (DATE)

Registration No. 13810

☒ Land Surveyor,

☐ County Surveyor,

OFFICE OF THE COUNTY RECORDER
County of Fillmore

I hereby certify that this document was filed in the Recorder's office at _____ .M. on the _____ day of _____ A.D., 19__

Co. Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 6, Township 103 Range 14, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/04/04 placed a COMPUTED POSITION

SKETCH OF REFERENCE TIES

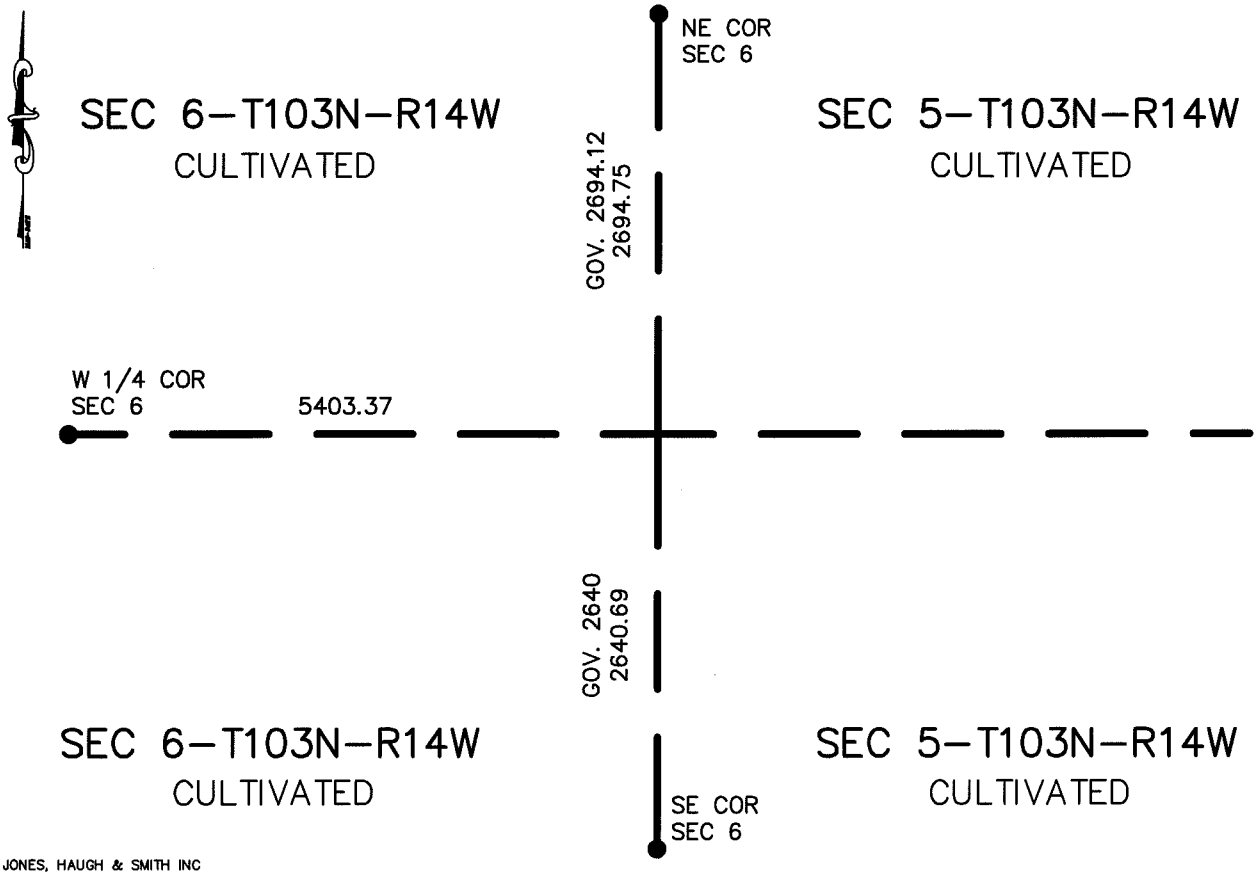


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 1-12-05
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

E 1/4 Corner Section 6-T103N-R14W

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853 . The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying
Massey Land Surveying

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, the corner is located in a plowed field. Information was used from Massey Land Surveying and occupation location from JHS to compute a location for this corner. The North-South location of the corner is in the lost position and the East-West location is from the information from Massey Land Surveying.

The monument set is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 6, Township 103, Range 14, 5 P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

On 5-2-94 found 0.8 Ø x 1.3 Stone in mottled soil with point up

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 5-2-94 placed Mower County Monument

## SKETCH OF REFERENCE TIES

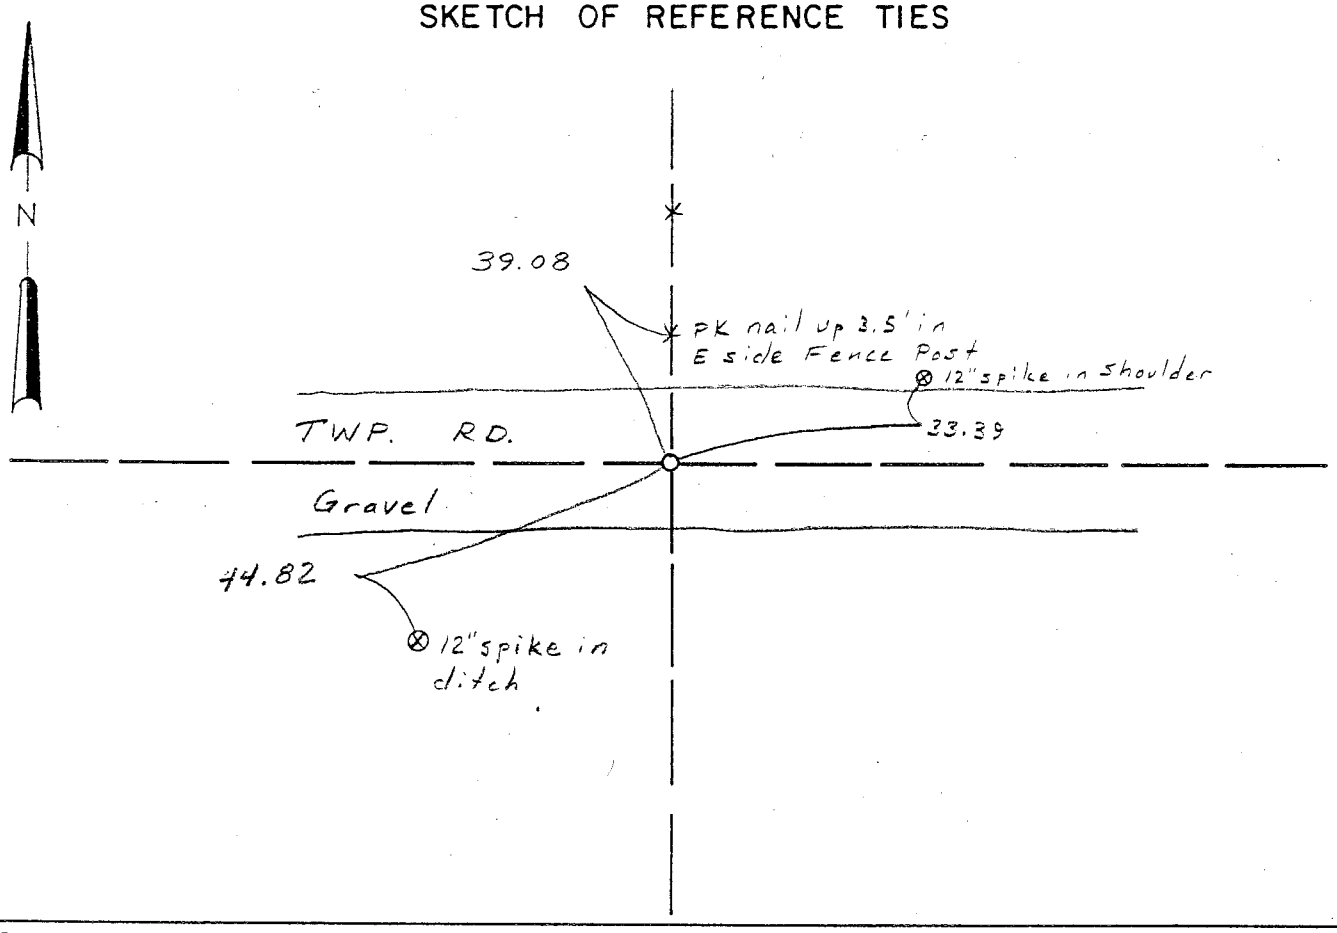


Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Steven J. Thompson — Signature

5-4-94 — Date

Registration No. 22705

☒ Land Surveyor ☐ Prof. Engineer
☐ County Surveyor ☐ County Engineer


Zenk•Read•Trygstad & ASSOCIATES, INC.
Engineers/Architects/Land Surveyors/Planners
Box 689, Albert Lea, MN 56007 507/373-0689


OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the _____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Northeast Corner of Section 6, Township 103 North, Range 14 West, 5th P.M., Mower County Minnesota.

Statement of Evidence

1853 John Ball, deputy surveyor, set a post at the corner and found:
N 87°30'E 1643 links to 6" Burr Oak
N 90°W 485 links to 14" Burr Oak
S 50°E 480 links to 14" Burr Oak

May 2, 1994 Steven J. Thompson, LS 22705, excavated a 4 foot deep trench using a backhoe and extending 4 feet north and 4 feet south of the township road centerline and 6 feet west by 7 feet east of the North-South fence line. A 0.8 foot diameter by 1.3 feet high stone was found with the point up 2.0 feet below the surface.

An analysis of the record gives no indication of the origin of the stone. Stones of similar size and shape have been found at other corners throughout the county. The stone is accepted as marking the location of the original public land survey corner.

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 6, Township 103, Range 14, 5 P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

On 5-2-94 found 0.6 ø x 1.0 Stone in mottled soil with point up. Stone removed during excavation

☐ left monument as found, ☐ lowered monument, ☒ removed monument (explain)

On 5-2-94 placed Mower County Monument

## SKETCH OF REFERENCE TIES

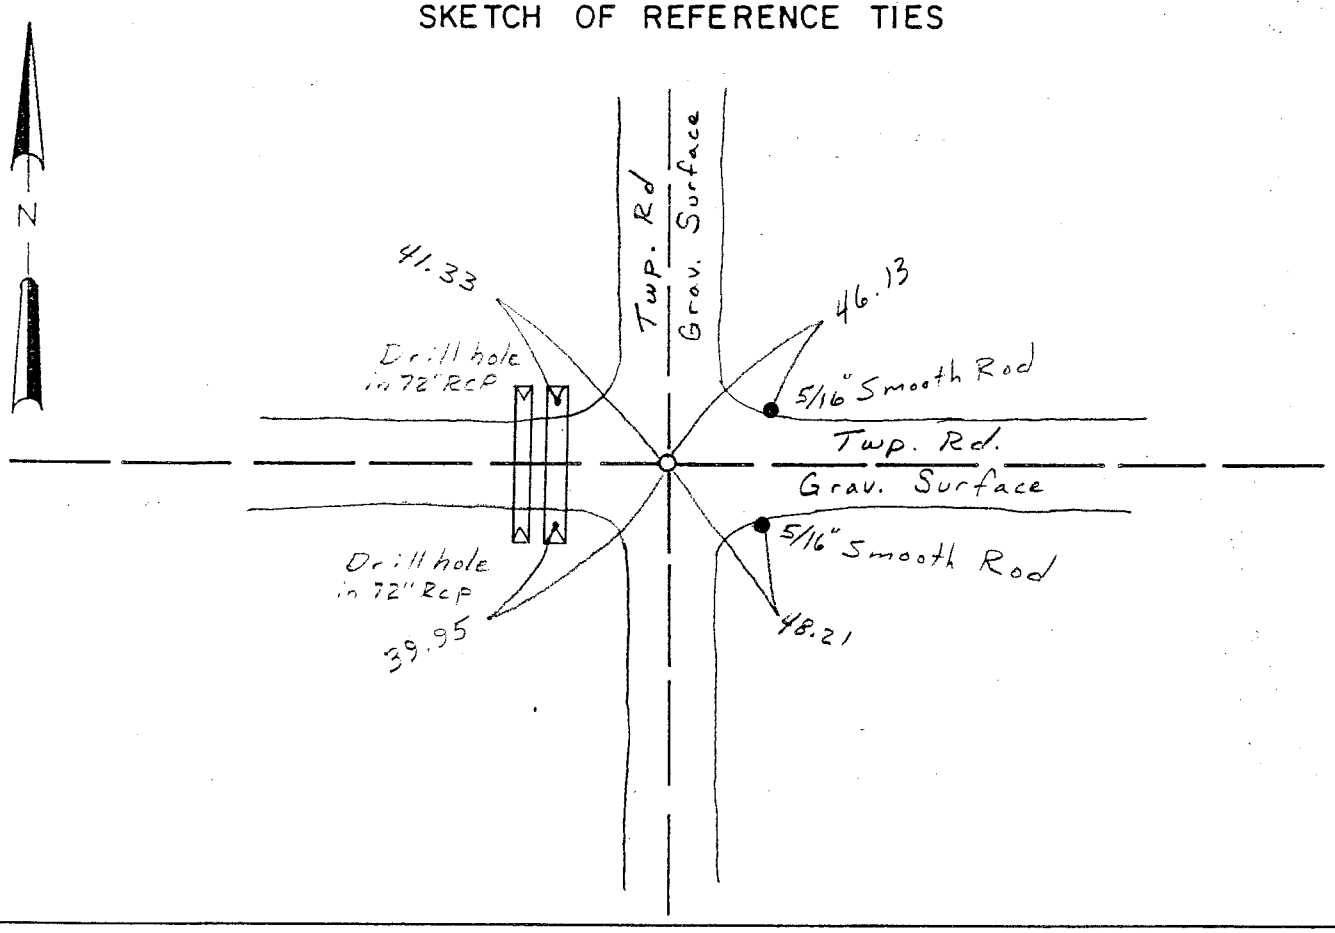


Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Steven J. Hanson — 5-4-94

Signature — Date

Registration No. 22705

☒ Land Surveyor ☐ Prof. Engineer
☐ County Surveyor ☐ County Engineer


Zenk•Read•Trygstad & ASSOCIATES, INC.
Engineers/Architects/Land Surveyors/Planners
Box 689, Albert Lea, MN 56007 507/373-0689


OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the _____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

North Quarter Corner of Section 6, Township 103 North, Range 14 West, 5th P.M., Mower County Minnesota.

Statement of Evidence

1853 John Ball, deputy surveyor, set a post at the corner and found:
N 87°30'W 935 links to 10" Black Oak
N 83°E 913 links to 10" Burr Oak

May 2, 1994 Steven J. Thompson, LS 22705, excavated a 5.5 foot deep trench using a backhoe and extending 4 feet north and 4 feet south by 6 feet west and 5 feet east of the Centerline intersection. A 0.6 foot diameter by 1.0 foot high stone was found with the point up 3.5 feet below the surface.

An analysis of the record gives no indication of the origin of the stone. Stones of similar size and shape have been found at other corners throughout the county. The stone is accepted as marking the location of the original public land survey corner.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 7, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11/18/1999 (DATE) placed a 1/2" X 30" REBAR

SKETCH OF REFERENCE TIES

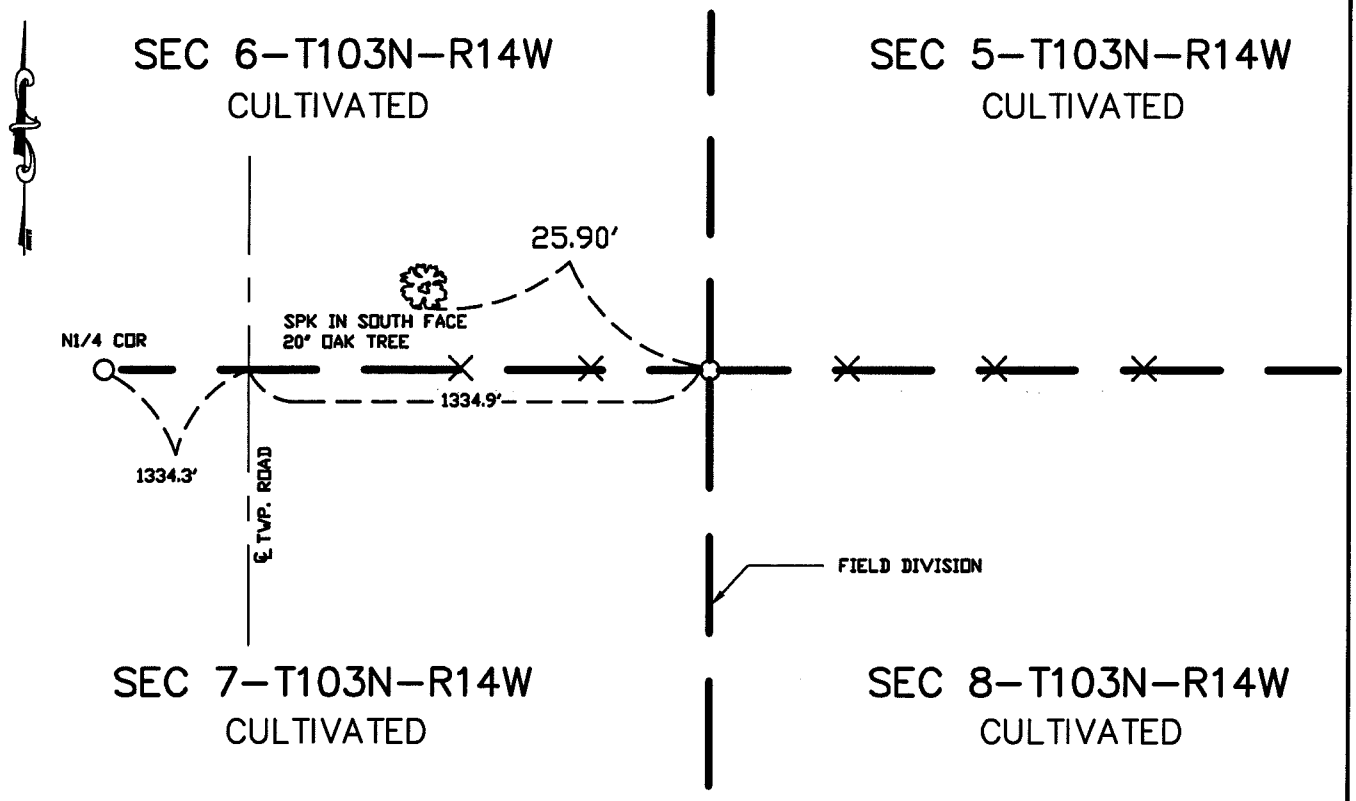


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 3-1400 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NE Cor Sec 7-103-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1999 Corner set by Jerome Schwarz, RLS #13810.
He searched area and dug with a shovel in area of occupation lines, and found nothing.
Set a ½" rebar for corner- On intersection of East-West fence line and fence line ridge to the south. Took ties.

The monument fits occupation centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 7, Township 103N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-5-85 (DATE) found a PK nail on road surface over a spike over a ½" dia. iron cast in center of 5" dia. concrete monument

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-5-85 (DATE) placed a RR spike over concrete monument

SKETCH OF REFERENCE TIES

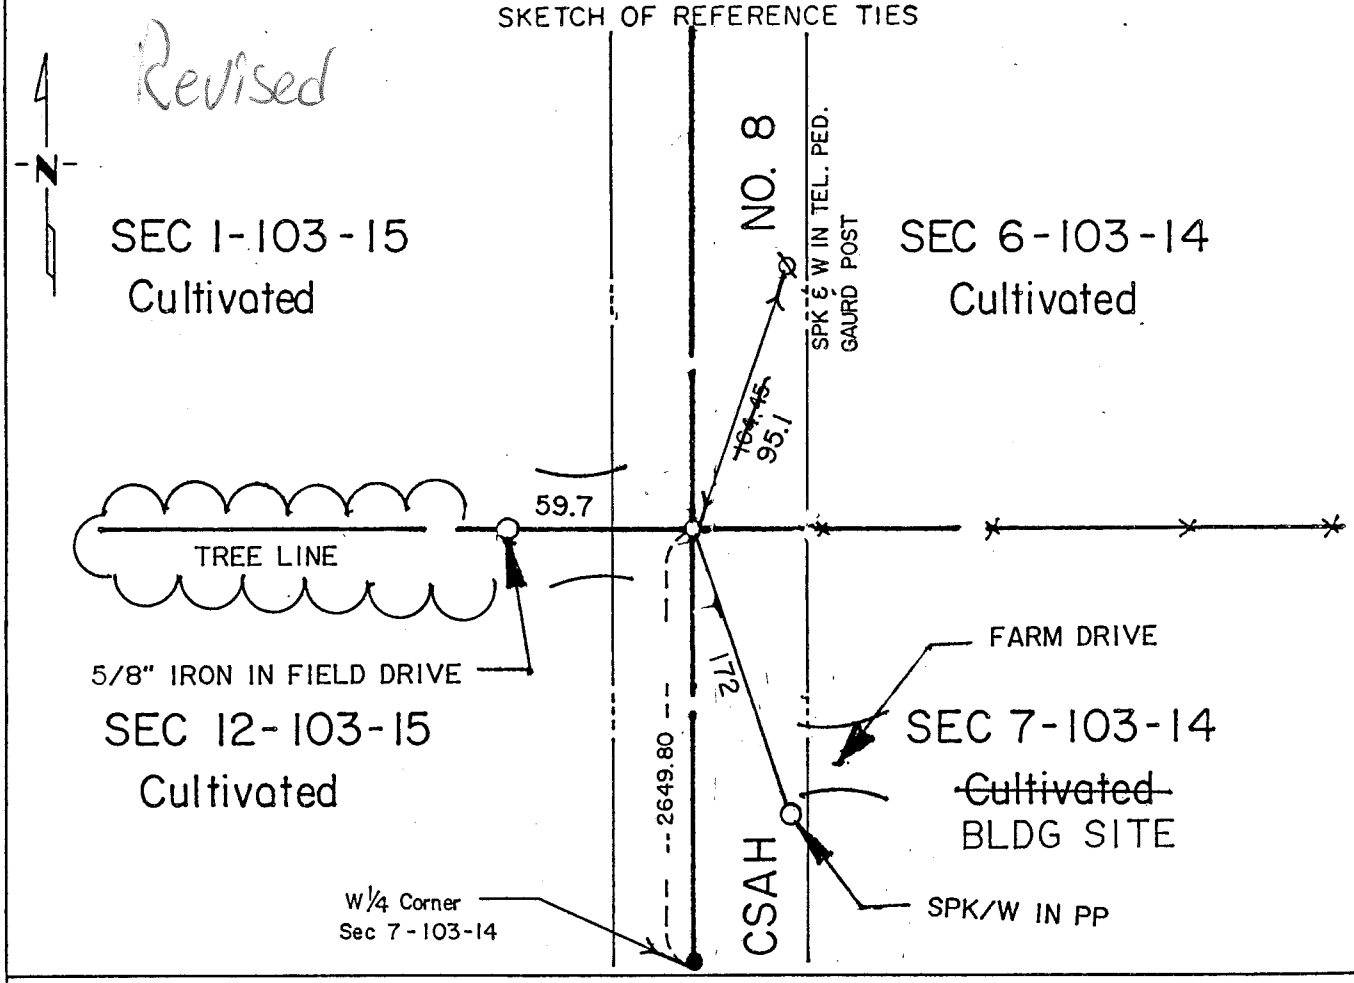


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-1-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Sec 7-103-14

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a post and a trench with a mound of earth. Ties were taken:

10" Black Oak S 23 1/2° W 290 links (191.40 ft)

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1940 Book 'A' in the County Engineer's Office shows a concrete monument inplace. Ties were taken and recorded.

1985 Jones, Haugh & Smith crew dug and found a PK nail over a spike over a 1/2 diameter iron, cast in a square concrete monument 1.8 feet deep in line with fence east-west, 1.5 feet west of the centerline of County State Aid Highway No. 8.

Corner found fits occupation, road centerlines, past records and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 7, Township 103N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-5-85 (DATE) found a PK nail on road surface over a spike over a ½" dia. iron cast in center of 5" dia. concrete monument

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-5-85 (DATE) placed a RR spike over concrete monument

SKETCH OF REFERENCE TIES

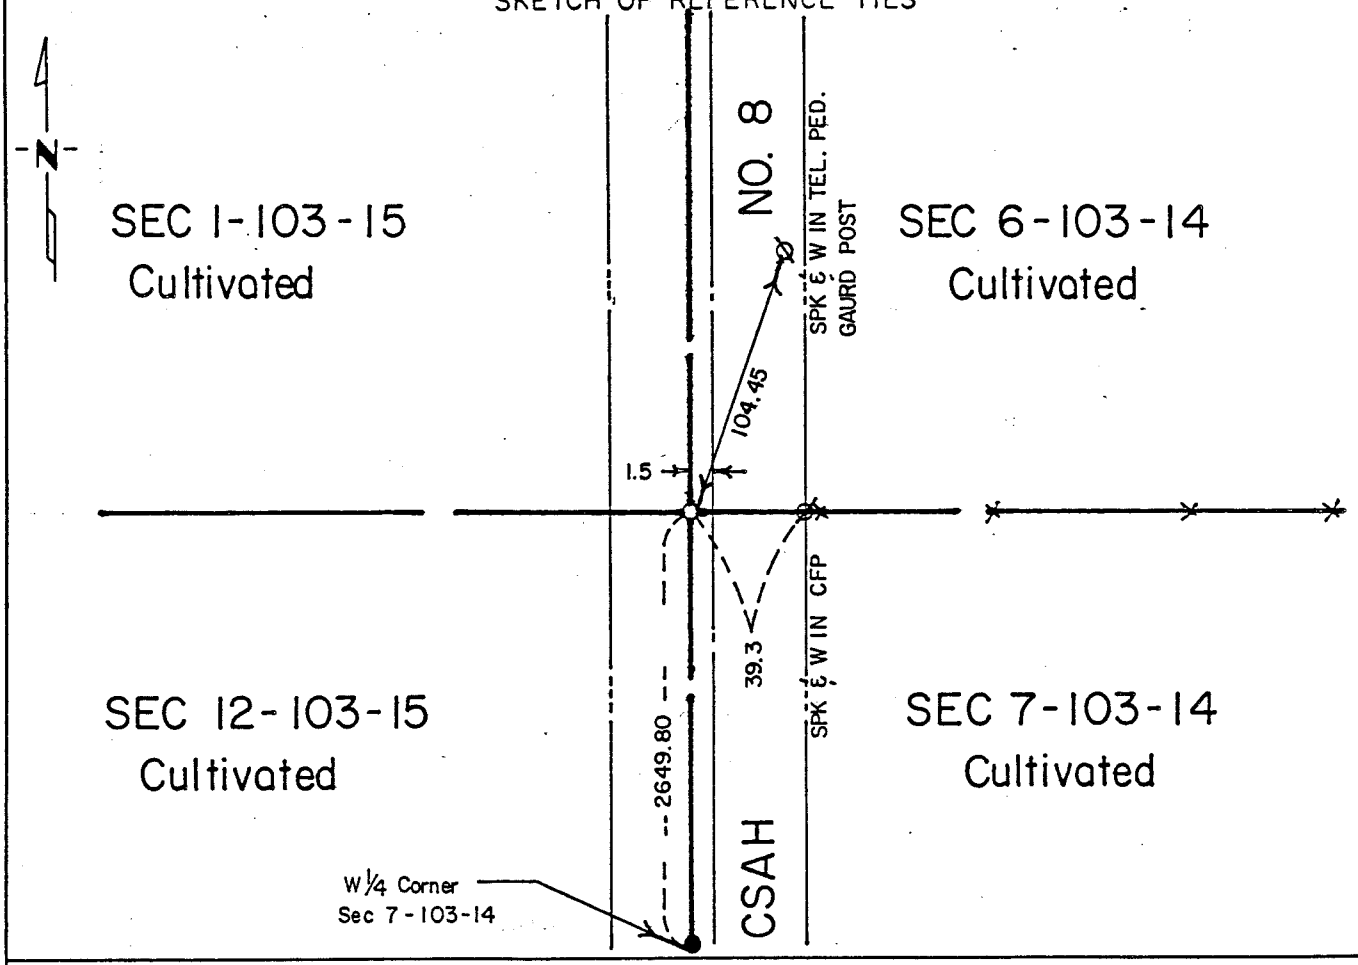


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ 11-1-91
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Sec 7-103-14

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a post and a trench with a mound of earth. Ties were taken:

10" Black Oak S 23 1/2° W 290 links (191.40 ft)

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1940 Book 'A' in the County Engineer's Office shows a concrete monument inplace. Ties were taken and recorded.

1985 Jones, Haugh & Smith crew dug and found a PK nail over a spike over a 1/2 diameter iron, cast in a square concrete monument 1.8 feet deep in line with fence east-west, 1.5 feet west of the centerline of County State Aid Highway No. 8.

Corner found fits occupation, road centerlines, past records and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 8, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a _____

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/16/2002 (DATE) placed a 5/8" X 16" IRON

SKETCH OF REFERENCE TIES

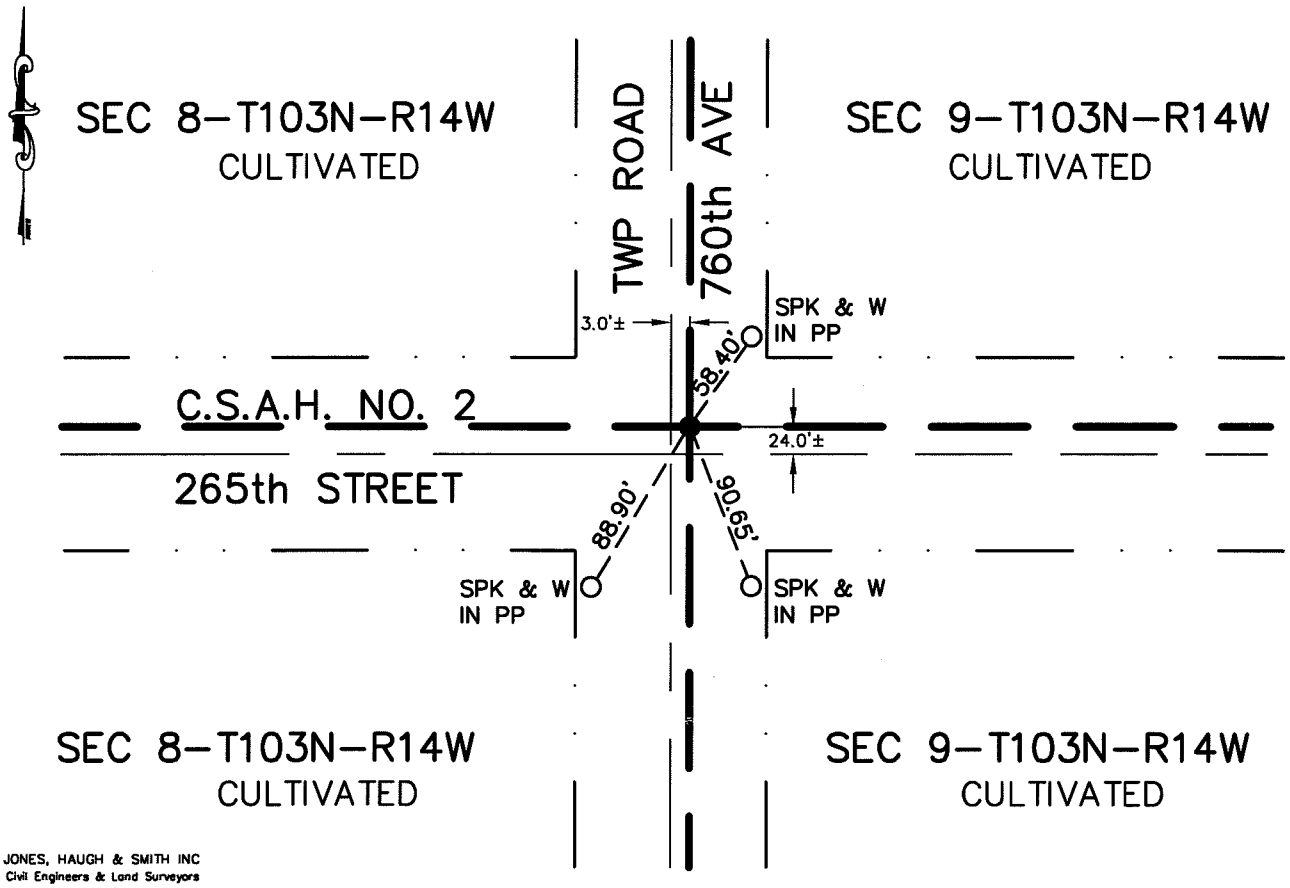


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 11-5-02 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

E1/4 Cor Sec 8-103-14

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1973 C.S.A.H. No. 2 County Road Plan shows a stone and wood stake at this location.

2002 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the location determined from data on C.S.A.H. No. 2 road plan. No evidence of the stone on wood stake was found. Jones Haugh and Smith crew then reset the corner using information from C.S.A.H. No. 2 road plan.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 8, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a _____

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/10/2002 (DATE) placed a 5/8" X 16" IRON CAP

SKETCH OF REFERENCE TIES

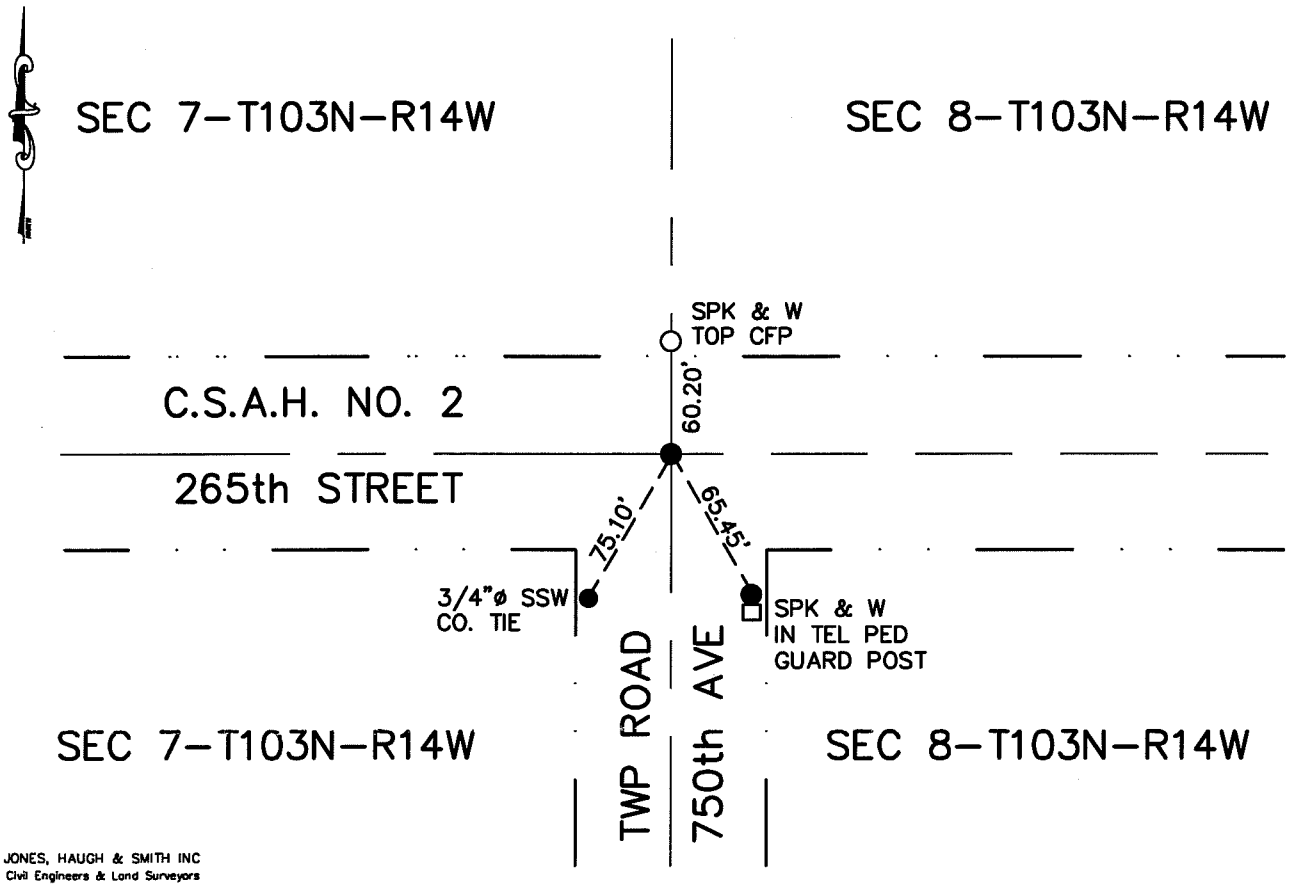


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 11-5-02 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

W1/4 Cor Sec 8-103-14

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1973 Mower County Highway records and Road Plan shows a stone at this location with ties.

2002 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the location and did not find any evidence of the stone or stake. We then reset the corner using information from C.S.A.H. No. 2 road plan. After the corner was reset we again checked for original ties and found the ¾" iron which had been set 75.00 feet southwest of the corner.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. "N" P. 17

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 8, Township 103, Range 14, 5TH P.M.

STATE OF MINNESOTA, County of [redacted] MOWER.


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3/9/88 (DATE) placed a 1/2" IRON PIPE, WITH REG. NO. 13810 ON CAP, AS THE CORNER

## SKETCH OF REFERENCE TIES

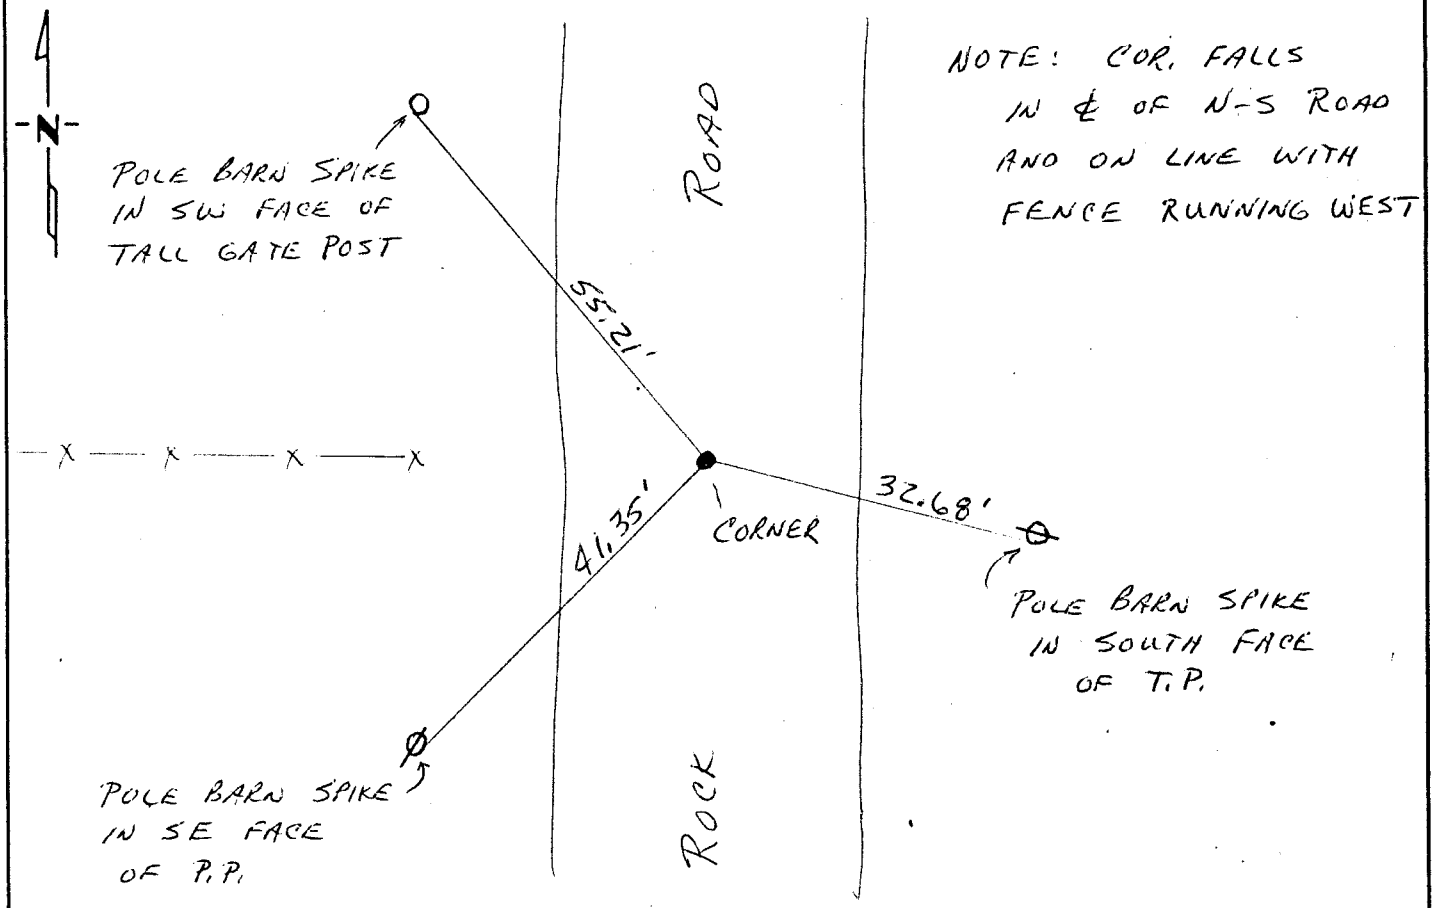


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Jerome R. Schwarz (SIGNATURE) 3/18/88 (DATE)

Registration No. 13810

☒ Land Surveyor,

☐ County Surveyor,

OFFICE OF THE COUNTY RECORDER
County of Fillmore

I hereby certify that this document was filed in the Recorder's office at _____ .M. on the _____ day of _____ A.D., 19__

Co. Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Index No. "O" p17

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 9, Township 103, Range 14, 5TH P.M.

STATE OF MINNESOTA, County of [redacted] MOWER.


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3/4/88 (DATE) placed a 1/2" IRON PIPE, WITH REG. NO. 13810 ON CAP, AS THE CORNER

## SKETCH OF REFERENCE TIES

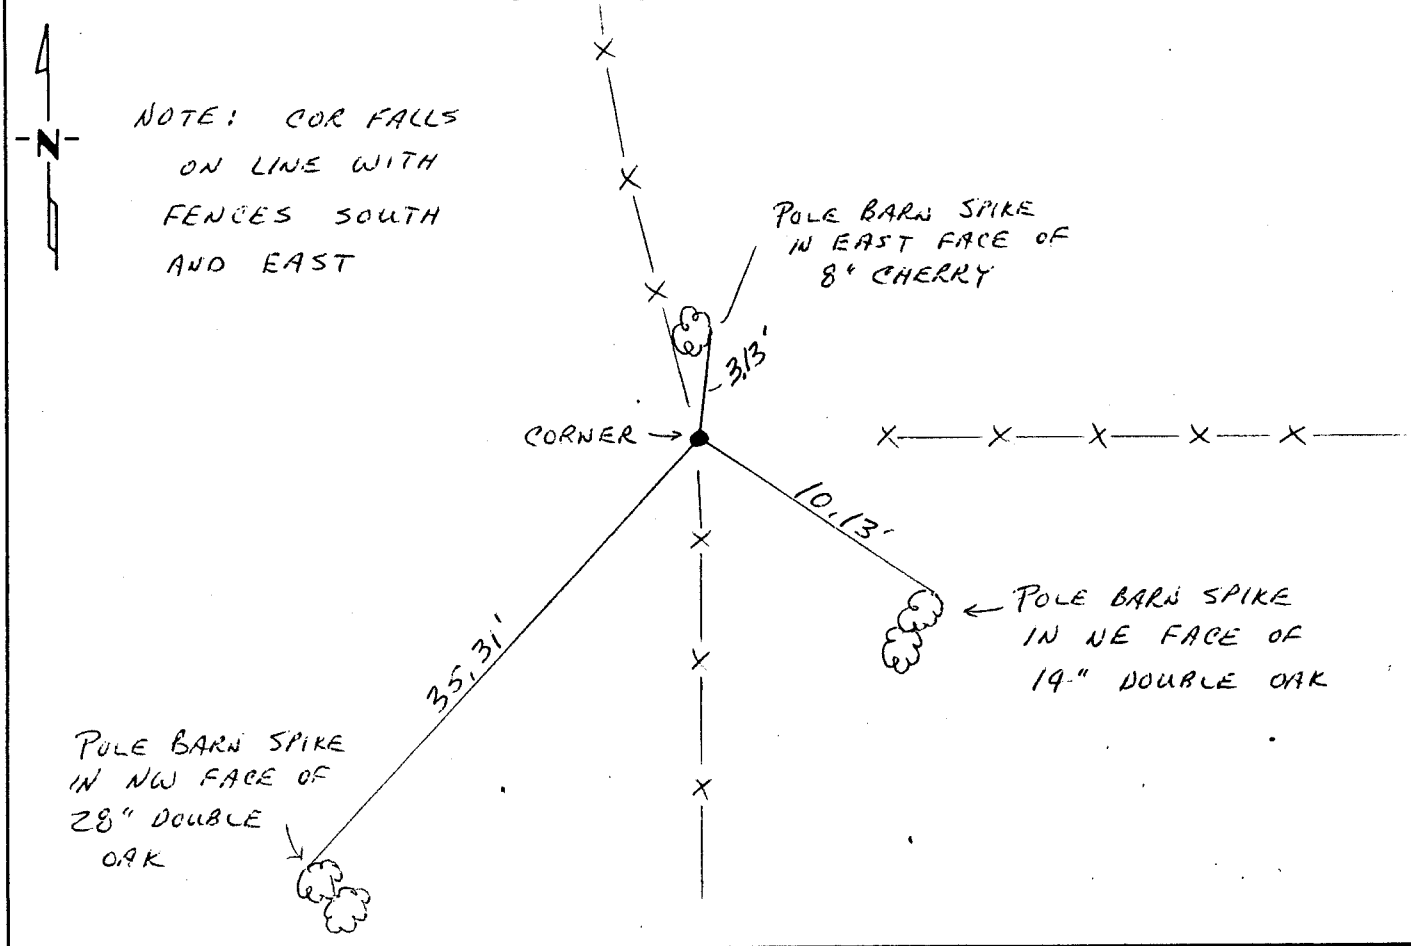


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John R. Schwarz (SIGNATURE) 3/8/88 (DATE)

Registration No. 13810

☒ Land Surveyor,

☐ County Surveyor,

OFFICE OF THE COUNTY RECORDER
County of Fillmore

I hereby certify that this document was filed in the Recorder's office at _____ .M. on the _____ day of _____ A.D., 19___

Co. Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Index No. "E" COR. BOOK " " PAGE 17

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 10, Township 103, Range 14, 5TH P.M.

STATE OF MINNESOTA, County of [redacted] MOWER.


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 5/5/89 (DATE) placed a 1/2" CAPPED IRON PIPE DOWN 0.3' IN ℄ OF E-W ROCK ROAD AND ON LINE WITH REMAINS OF OLD FENCE NORTH

SKETCH OF REFERENCE TIES

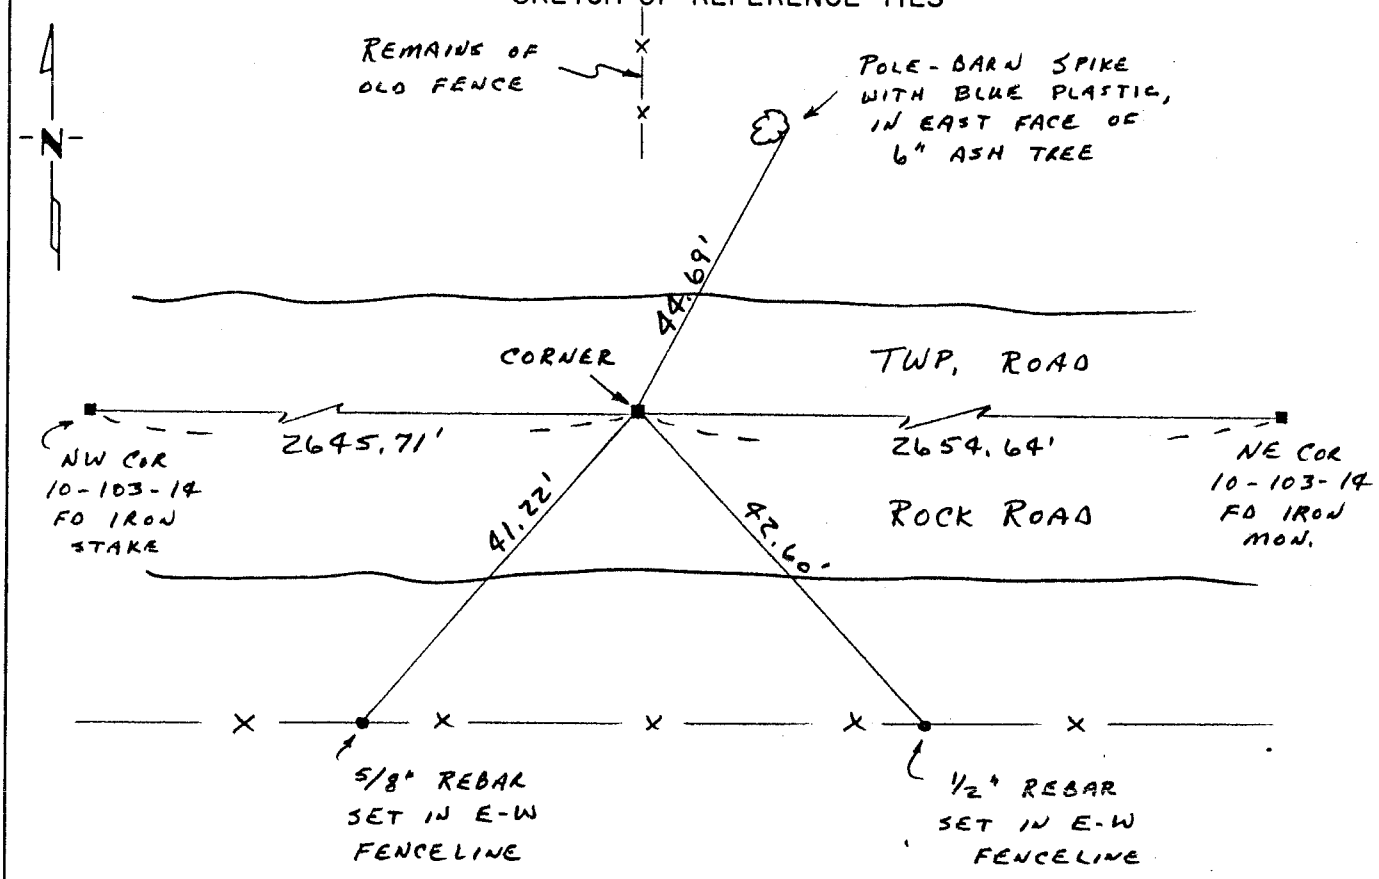


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Jerome R. Schwarz (SIGNATURE) 5/18/89 (DATE)

Registration No. 13810

☒ Land Surveyor,

☐ County Surveyor,

OFFICE OF THE COUNTY RECORDER
County of Fillmore

I hereby certify that this document was filed in the Recorder's office at _____ .M. on the ____ day of _____ A.D., 19 ___

Co. Recorder _____

By _____, Deputy

DOCUMENT NO. _____

"E" TIE BOOK p16

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner to Section 11 Township 103N Range 14W No. 11


STATE OF MINNESOTA,

County of Mower S.S.


I hereby certify that on the 29th day of November, 19 66, that I, Leonard Sankstone, a Registered Land Surveyor, found the Northwest corner of Section 11, T103N, R14W, which was evidenced by 12"x15"x15" stone monument over a 12" dia x 12" stone monument over a 2" nail 36" below grade, and I further certify that to perpetuate the location of such corner I did, at the exact location thereof, place a permanent marker consisting of 3"x20" cast iron ferro magnetic monument, 4" below grade.

I further certify that I established 4 references or witness monuments consisting of 2 trees, 1 telephone pole, 1 fence post, which reference or witness monuments are located in the manner following.

N 31.03 ft. Cor. Fence Post(N&B cap)
NE 50.74 ft. Telephone Pole (N&B cap)
SE 54.54 ft. 18" J. Pine (N&B cap)
SSW 49.48 ft. 24" W. Pine (N&B cap)

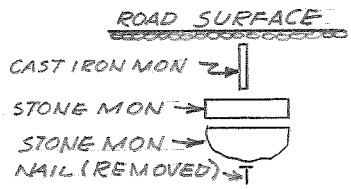


SECTION

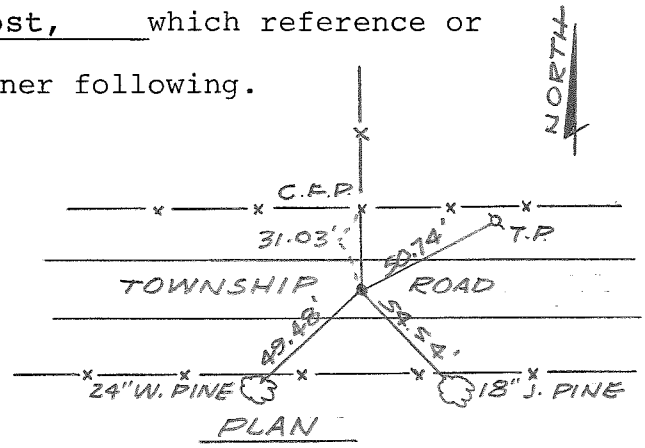


PLAN

Dated at Rochester, Minnesota, this 1st day of December, 19 66.

Distance to N1/4 Sec. 11 = 2641.70

Leonard Sankstone

Leonard Sankstone

Registered Land Surveyor No. 5325

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that the within instrument was filed in this office for record on the _____ day of _____ A.D., 19____.

280012

_____

Register of Deeds

_____

BOOK 25 PAGE 141

BOOK 25 PAGE 142 "E" TIE BOOK p 16

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NE Corner to Section 11 Township 103N Range 14W No. 12


STATE OF MINNESOTA,

County of Mower S.S.

I hereby certify that on the 29th day of November, 1966, that I, Leonard Sankstone, a Registered Land Surveyor, found the Northeast corner of Section 11, T103N, R14W, which was evidenced by 18"x18"x18" stone monument witnessed by a 1/2"x12" bolt on north edge, 72" below grade, and I further certify that to perpetuate the location of such corner I did, at the exact location thereof, place a permanent marker consisting of 1" iron pipe & set bolt inside pipe, 8" below grade. I further certify that I established 3 references or witness monuments consisting of 2 fence posts, 1 power pole, which reference or witness monuments are located in the manner following.

N 29.83 ft. Power Pole (N&B cap)
SE 42.26 ft. Corner Fence Post (N&B cap)
S 56.75 ft. Corner Fence Post (N&B cap)



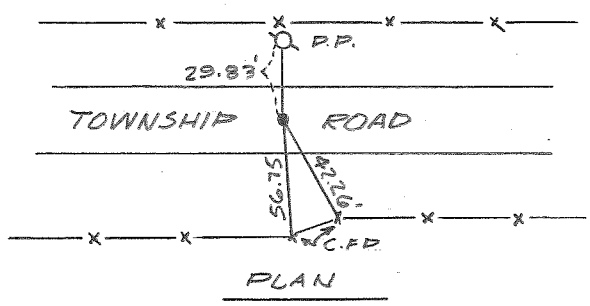
Dated at Rochester, Minnesota, this 1st day of December, 1966.

Distance to N1/4 Sec. 11 - 2656.73

Leonard Sankstone

Leonard Sankstone

Registered Land Surveyor No. 5325

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that the within instrument was filed in this office for record on the _____ day of _____ A.D., 19____.

28001.3

8 Dec 66
11 misc 25
142

_____

Register of Deeds

_____

"G" TIE BOOK P16

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


N 1/4 Corner to Section 11 Township 103N Range 14W No. 13

STATE OF MINNESOTA,


County of Mower S.S.

I hereby certify that on the 29th day of November, 1966, that I, Leonard Sankstone, a Registered Land Surveyor, found the North quarter corner of Section 11, T103N, R14W, which was evidenced by a 4"x6"x18" limestone monument with chiseled "X", 72" below grade, and I further certify that to perpetuate the location of such corner I did, at the exact location thereof, place a permanent marker consisting of 3"x20" cast iron Ferro magnetic monument. I further certify that I established 4 references or witness monuments consisting of 2 corner fence posts, 1 telephone pole, 1 power pole, which reference or witness monuments are located in the manner following.

NW 68.62 ft. Corner Fence Post (N&B cap)
NE 57.48 ft. Telephone Pole (N&B cap)
SE 49.32 ft. Corner Fence Post (N&B cap)
SW 72.18 ft. Power Pole (N&B cap)
(5.50 E of centerline U.S. Hwy.63) Approx. Location




SECTION

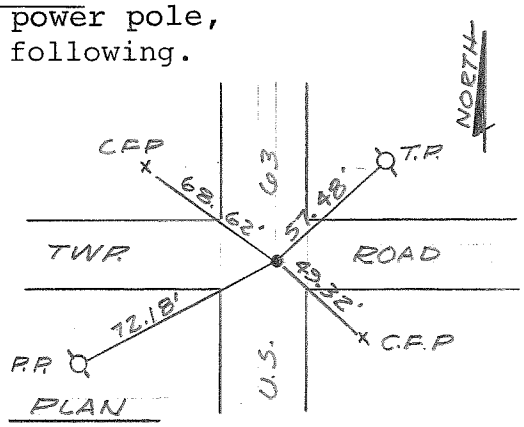


Dated at Rochester, Minnesota, this 1st day of December, 1966.

Distance to NW corner Sec. 11 = 2641.70
Distance to NE corner Sec. 11 = 2656.73

Leonard Sankstone

Leonard Sankstone
Registered Land Surveyor No. 5325

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that the within instrument was filed in this office for record on the _____ day of _____ A.D., 19____.

280014

8 Dec 66
11 misc a 143

_____
Register of Deeds

BOOK 25 PAGE 143

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 11, Township 103N, Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 8-29-91 (DATE) found a 3/4" ø x 12" iron

☐ left monument as found, ☐ lowered monument, ☒ removed monument (explain)

☒ On 8-29-91 (DATE) placed a Cast iron monument at location of 3/4" ø iron

SKETCH OF REFERENCE TIES

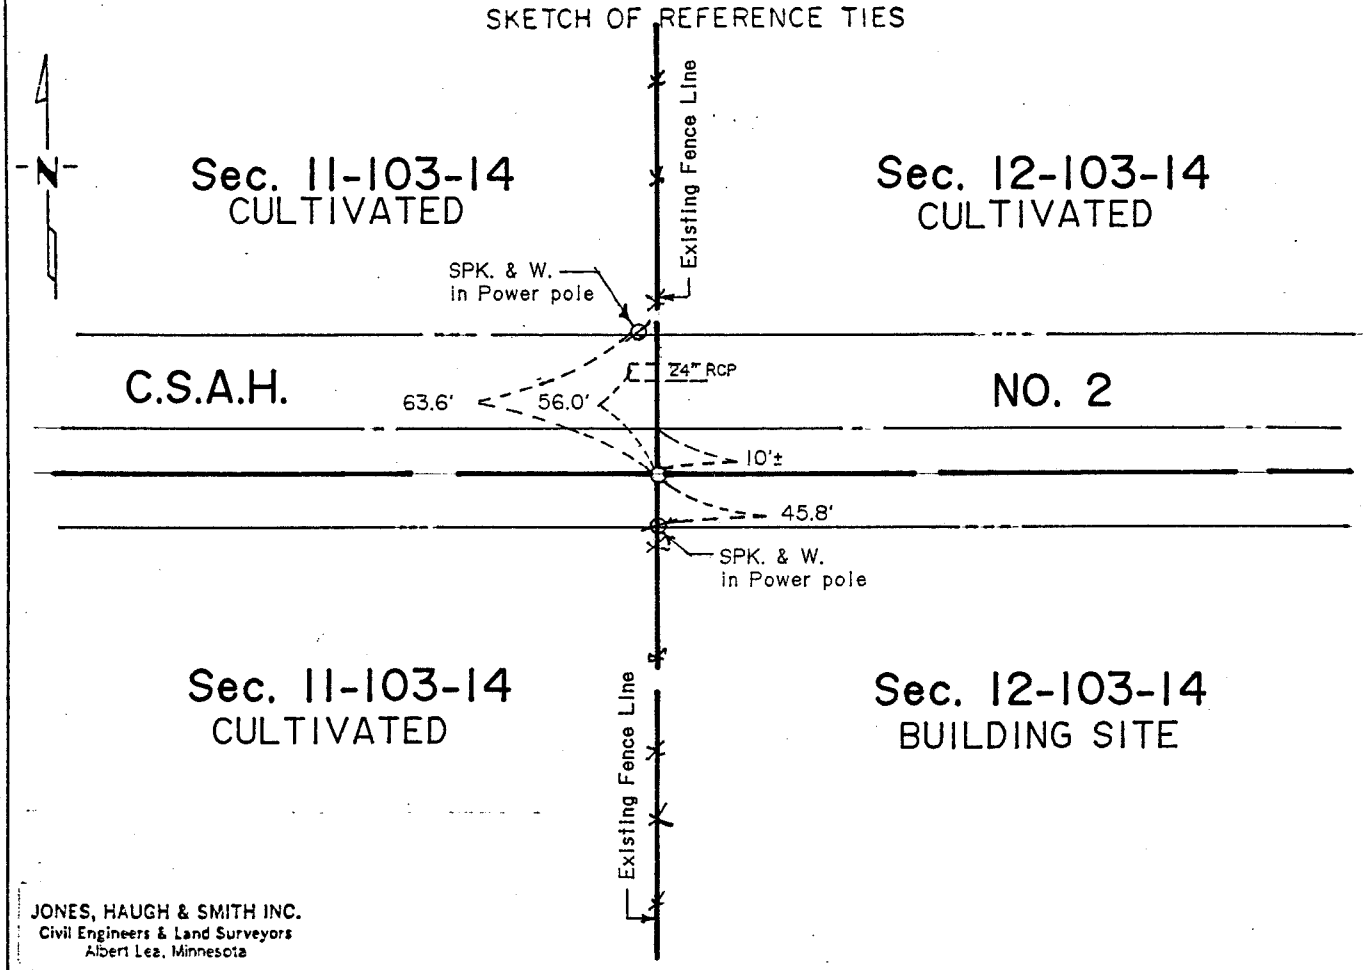


JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-11-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Section 11-103-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

| | | |
|---|---|---|
| 6" Burr Oak | N 17 1/4° E | 90 links (59.40 ft) |
| 6" Burr Oak | S 13 1/4° W | 528 links (348.48 ft) |

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

1989 County grading plan shows 1/4 corner 10.0 feet south of centerline PI in line with fence north and south. The following ties were taken:
39.8' N to CFP
35.6' S to 3" steel CFP
30.8' S face of PP
33.9' N face of PP

Also noted on grading plan was a 3 foot core cut made at this location which would have destroyed the original public land survey corner of any perpetuation thereof.

1991 Jones, Haugh & Smith Inc crew using information from 1989 grading plan dug with County backhoe 10.0 feet south of centerline PI and uncovered a 3/4" diameter x 12" iron one foot below road surface. Continued digging and found no further evidence of public land survey corner or a perpetuation thereof. Therefore established position of corner using location of 3/4" x 12" iron as best evidence. Set a cast iron monument at this location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 12, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/08/1993 (DATE) found a 12x16x16 SQ. STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/08/1993 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

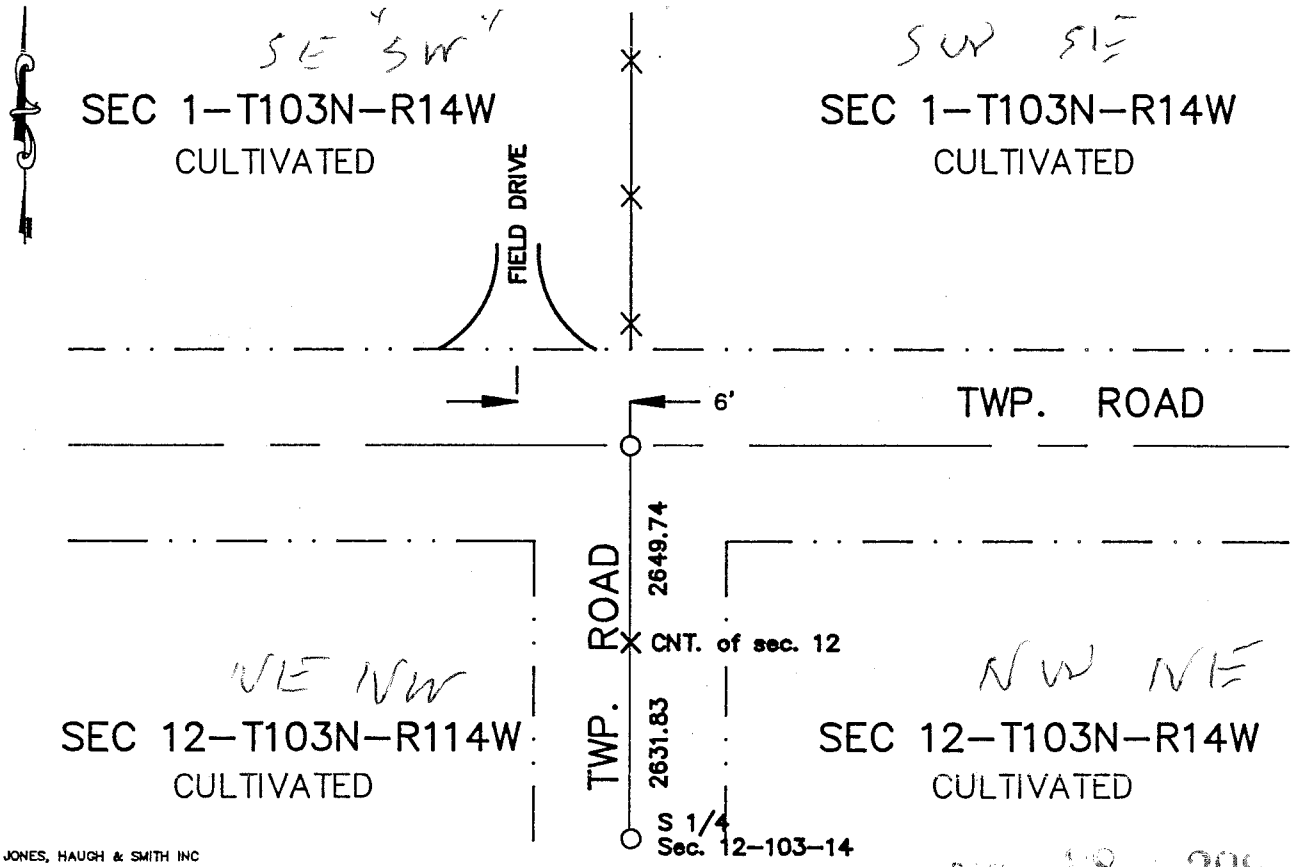


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 88 PAGE 398

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-25-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P. M. on the 26 day of Sept A.D., 1995

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 439510

M.H.D. FORM NO. 2105

Book 88 Misc Page 398

N 1/4 Cor SEC 12-103-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with the following ties:

14" White Oak S 80 1/4 degrees E 430 links
16" White Oak N 32 3/4 degrees W 185 links

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1993 Jones Haugh and Smith crew, under direction of John Schulte, Freeborn County Surveyor RLS 13807, dug with county backhoe at CL CL of E-W and South township roads and found a 4' piece of looped barbed wire with pieces of decayed wood post at a depth of 2'. Continued digging and found a 12"x16"x16" square stone which rested on virgin soil at a depth of 3.5'. Continued digging below stone to a depth of 4.5' and hit clay soil. Accepted stone as the perpetuation of the original PLS corner and set a 5/8"x16" iron pin on the North side of the stone and placed a cast iron monument near the road surface above the stone found.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 12, Township 103N, Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 8-29-91 (DATE) found a NO Evidence, corner destroyed by placement of 24" RCP

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 8-29-91 (DATE) placed a Cast iron monument using Co. ties taken during grading project

SKETCH OF REFERENCE TIES

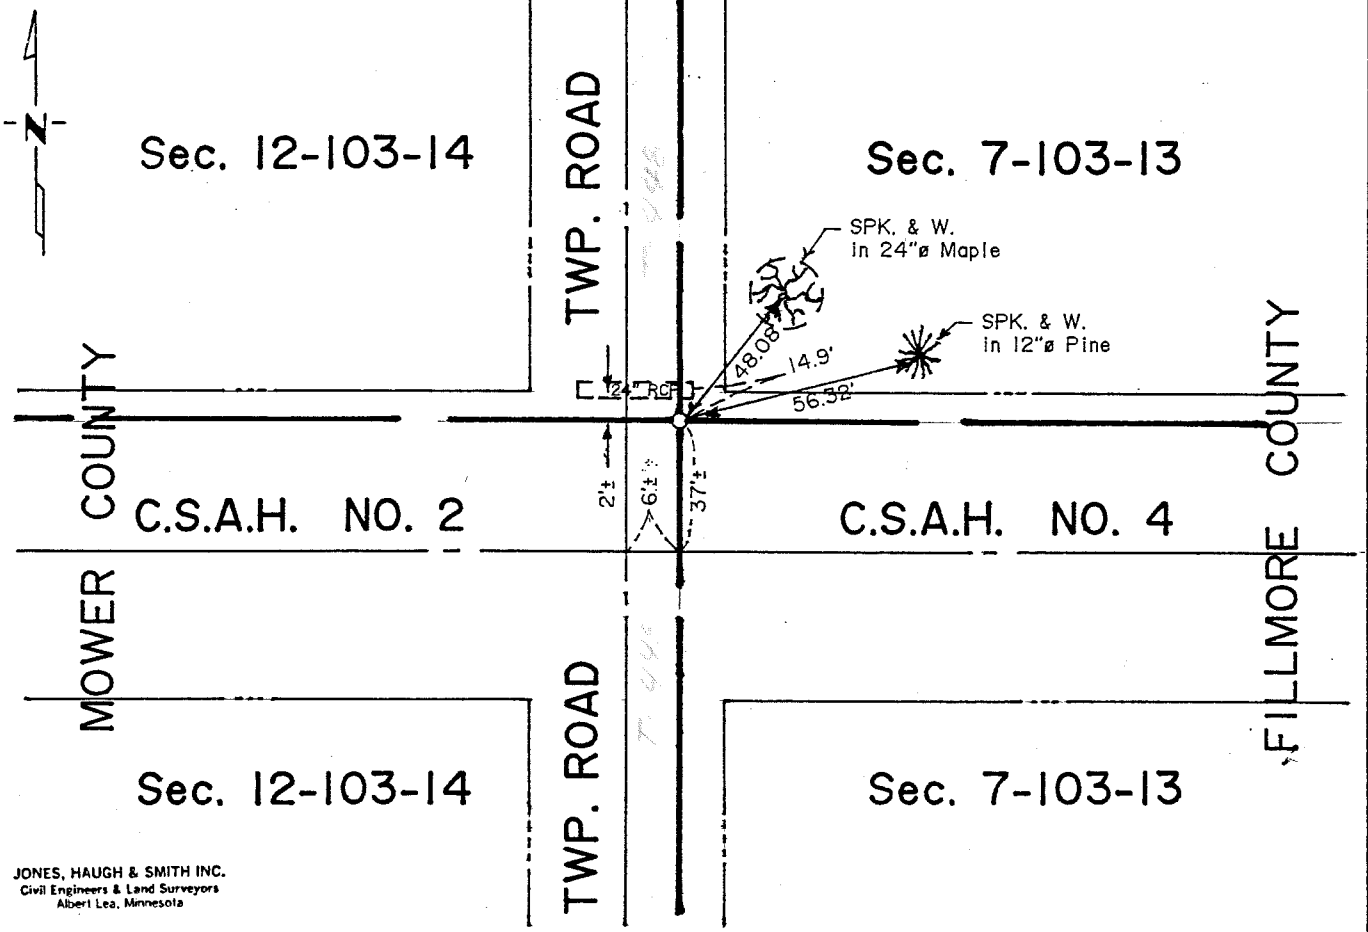


JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-11-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Section 12-103-14

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

| | | |
|---|---|---|
| 12" Burr Oak | | 558 links (368.28 ft) |
| 8" Burr Oak | S 11 1/2° E | 324 links (213.84 ft) |

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

1941 Book 'A' in the Office of the Mower County Engineer shows 4 stones over an iron monument. The following ties were taken:
35.0' E to centerline Maples north
68.9' SE to CFP
119.9' E to Burr Oak
63.4' SE to south end CM culvert

1989 County grading plan show a cast iron monument inplace and the following ties were taken during construction:
44.62' NW Spk in PP
48.08' NNE 24" Maple
56.32' ENE Spk in 15" Pine
77.44' SW Spk in top CFP
89.67' SE Spk in top CFP

Testimony of Mower County employee indicates this corner was dug with a backhoe by Ray Tucker RLS 15471 before grading project and a cast iron monument was set. No records were found in the Court House or were obtained from Mr. Tucker to support evidence of a perpetuation of original corner.

1991 Jones, Haugh & Smith Inc crew dug with County backhoe at a position using County ties from 1989 grading plan and found a new 24" RCP was installed during grading project which would have destroyed original public land survey corner or any perpetuation thereof. Therefore established location of corner using ties from 1989 grading plan being the last known position of monumentation at this location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 12, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 03/24/1994 (DATE) found a 3" STEEL PIPE CFP

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 03/24/1994 (DATE) placed a 5/8" IRON

SKETCH OF REFERENCE TIES

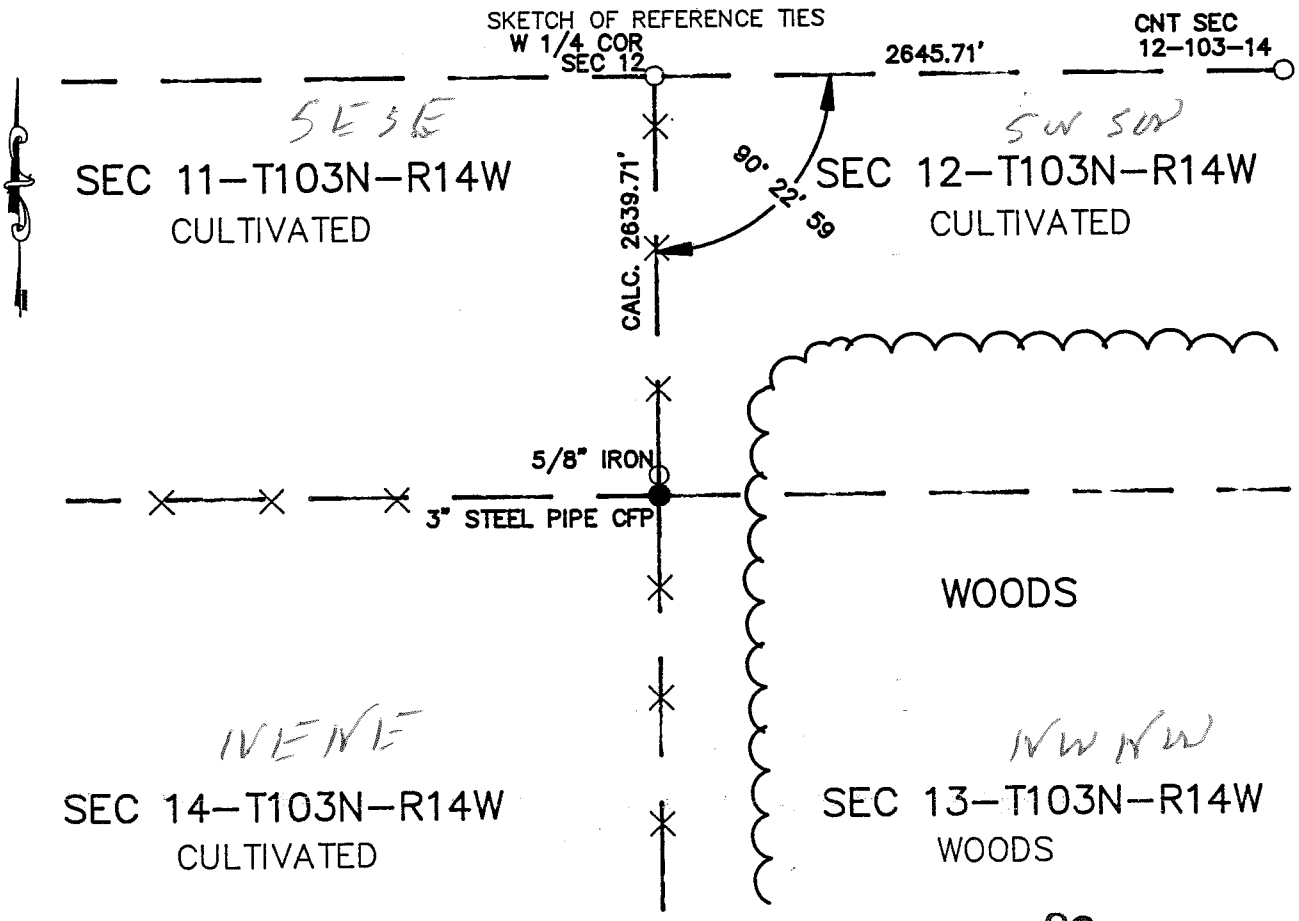


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 40

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 7-18-97 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2P .M. on the 29 day of July A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 454993

M.H.D. FORM NO. 2105

Book 96 Misc Page 40

SW Cor SEC 12-103-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1994 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found 3" steel pipe corner fence post with line fences running N-S and west. No evidence of a fence running east. Placed a 5/8" iron on the north side of pipe. Calculated a distance of 2639.71' to the W 1/4 corner of section.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 12, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/08/1993 (DATE) found a AXLE SHAFT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/08/1993 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

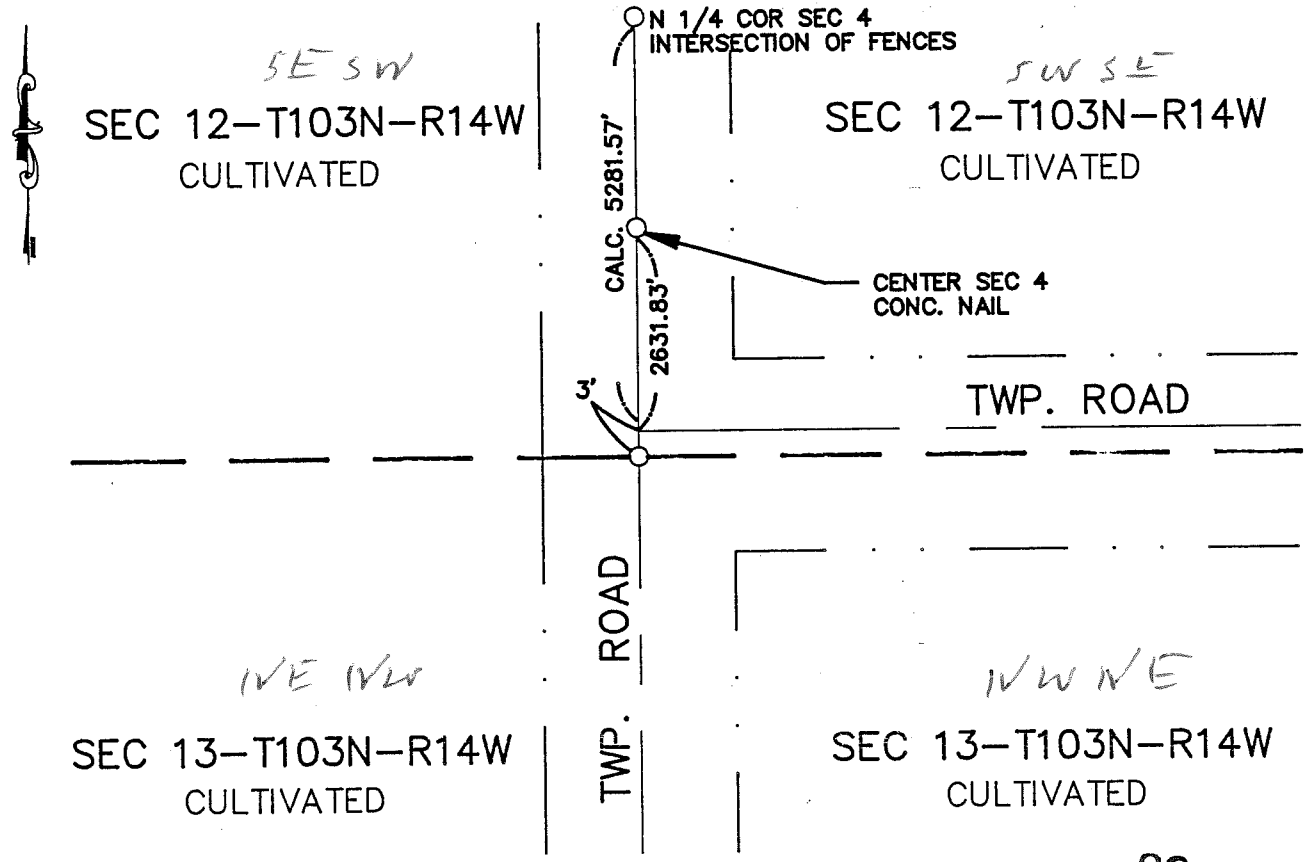


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 42

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-18-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 29 day of July A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Lowe, Deputy

DOCUMENT NO. 454994

M.H.D. FORM NO. 2105

Book 96 Misc Page 42

S 1/4 Cor SEC 12-103-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1993 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe on centerline-centerline of N-S and east township roads, found a 1" axle shaft at a depth of 4.5' and on centerline of N-S road and 3' south of centerline of east road. Shaft was in virgin soil and extended into clay. Accepted shaft as the perpetuation of the original PLS corner and set a cast iron monument near road surface above shaft found.

1994 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located cast iron monument and used it for a survey in the SE 1/4 SW 1/4 section 12-103-14.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 13, Township 103N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On 5-24-91 (DATE) found a 2"x1 1/2" iron 1.0' below surface

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-24-91 (DATE) placed a cast iron monument over iron found.

SKETCH OF REFERENCE TIES

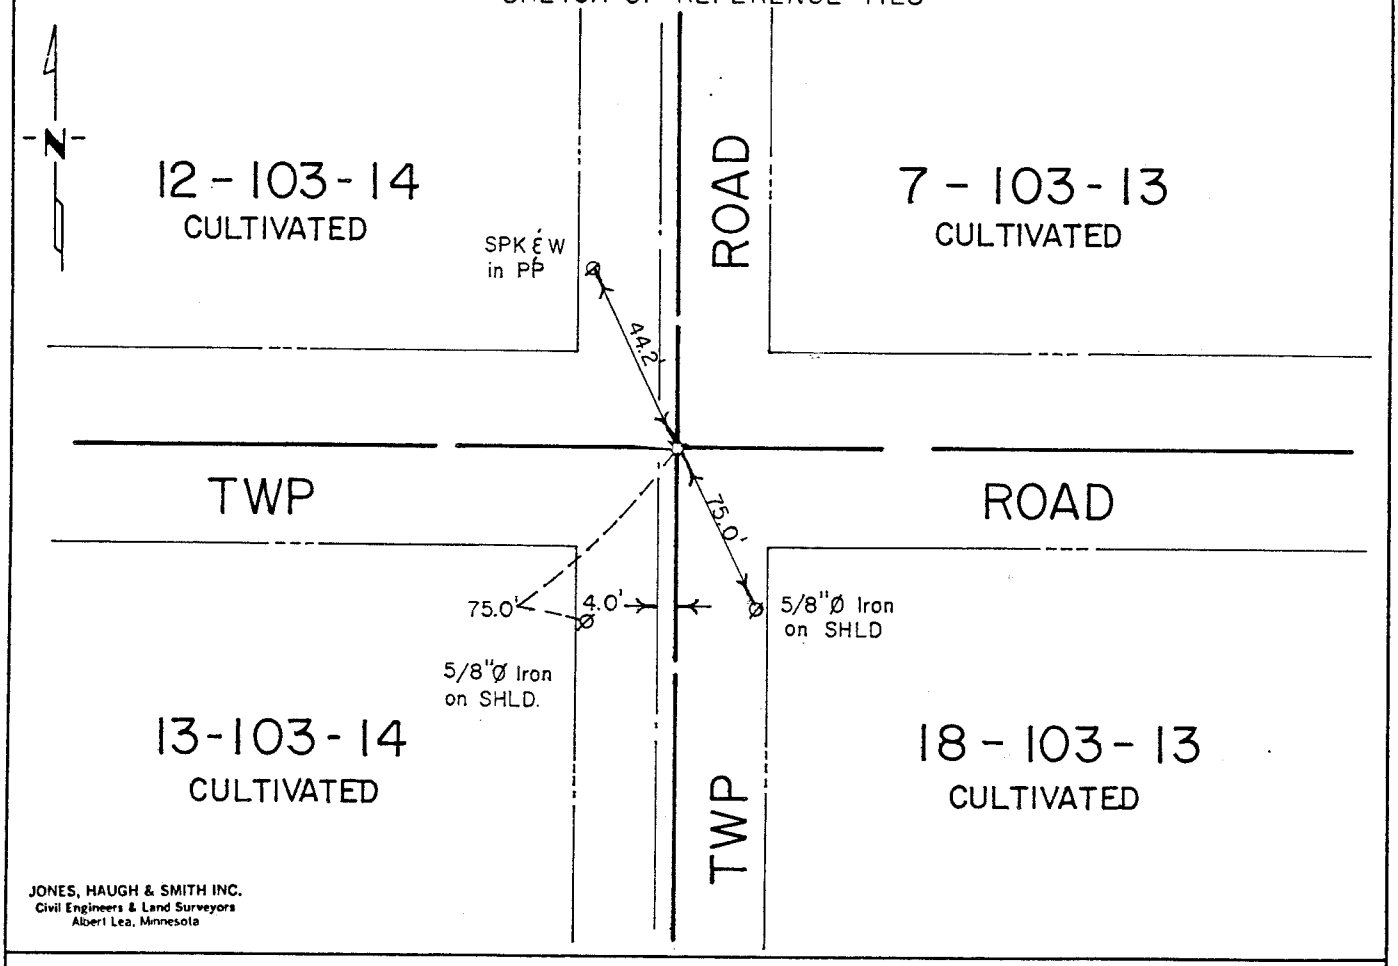


JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-30-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Section 13-103-14

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying
Filmore County Surveyor
Minnesota Dept. of Transportation

1888 Clausen, Mower County Surveyor from 1880-1892, uncovered Government post during a survey of the NE 1/4 of Section 13.

Date Unknown Irving Bacon set a 1 1/4" x 1 1/4" x 30" iron bar for the corner.

1975 Filmore County Surveyor found a 1 1/4" x 1 1/4" x 30" iron and accepted it as a perpetuation of the original corner. Ties were taken and a Certificate of Location was filed in Filmore County.

1991 Jones, Haugh & Smith Inc crew uncovered an iron monument accepted as the corner by the Filmore County Surveyor in 1975 for bridge project L4952 over Deer Creek. Placed a cast iron monument over the iron on the road surface and new ties were taken.

The monument agrees with past records and fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 13, Township 103N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On 5-24-91 (DATE) found a harrison cast iron monument 0.5' below surface

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

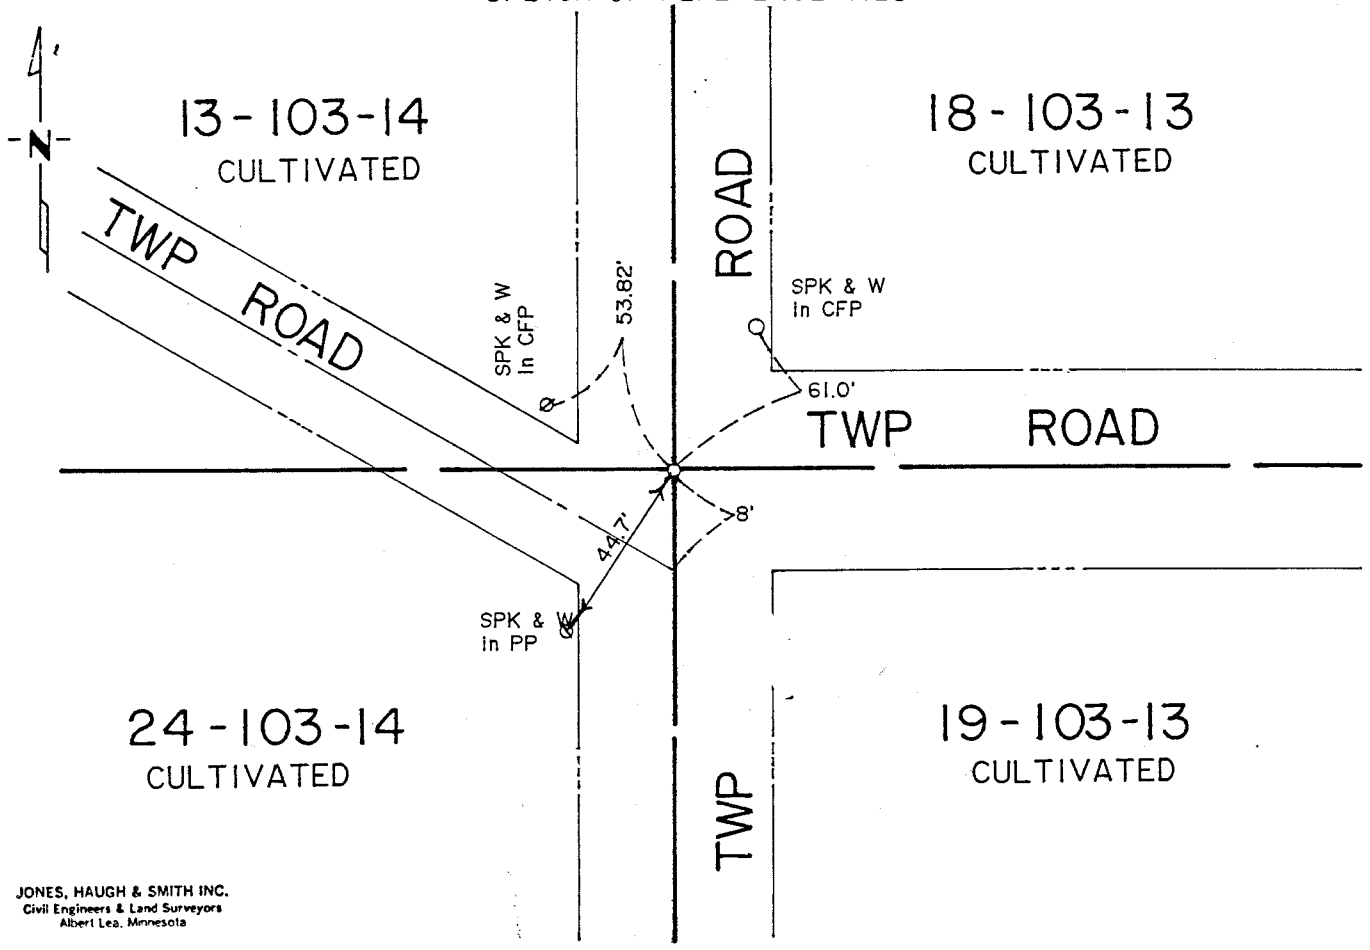


JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-30-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Section 13-103-14

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying
Filmore County Surveyor
Minneosota Dept. of Transportation

The following information was obtained to support evidence of a perpetuation of the original public land survey corner:

1981 Filmore County Surveyor David J. Knutson, RLS 10937, dug with a backhoe and found no evidence of a public land survey corner or a perpetuation of. Therefore established the position of the corner using occupation and road centerlines and set a cast iron monument on the road surface.

1991 Jones, Haugh & Smith Inc crew uncovered a cast iron monument by Filmore County Surveyor during a bridge survey L4952 over Deer Creek. The monument was left as found and new ties were taken.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 13, Township 103N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 5-24-91 (DATE) found a harrison cast iron monument 0.5' below surface

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

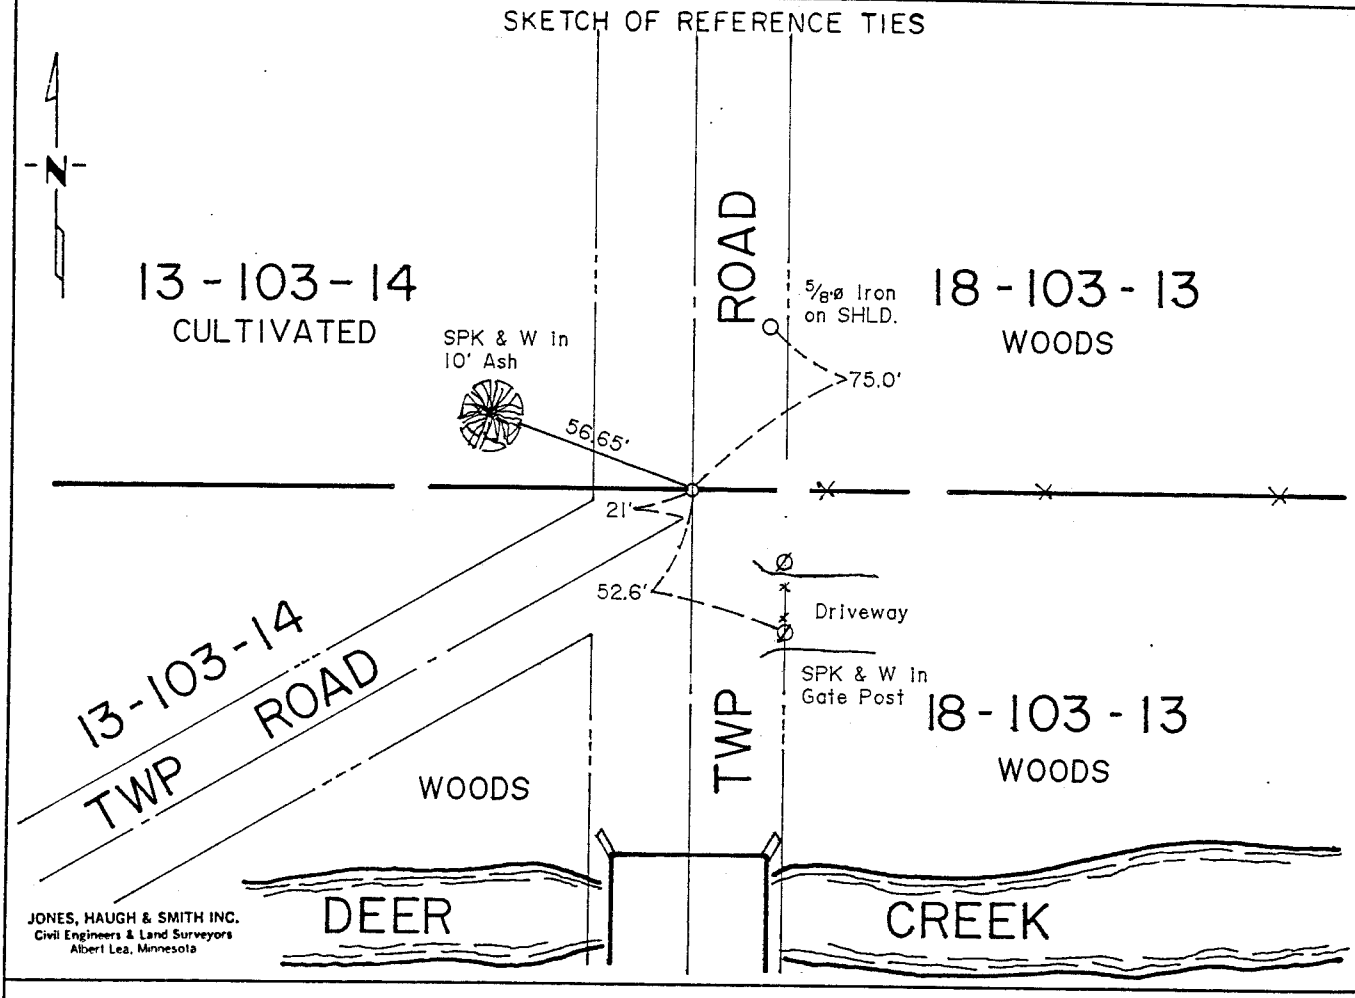


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ SIGNATURE 5-30-91 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Section 13-103-14

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying
Filmore County Surveyor
Minnesota Dept. of Transportation

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1888 Clausen, Mower County Surveyor from 1880-1892, uncovered the Government post during a survey of the NE 1/4 of Section 3.

1981 Filmore County Surveyor David J. Knutson, RLS 10937, found no evidence of Government post or a perpetuation of. Therefore established position of 1/4 corner using occupation and road centerline and set a cast iron monument.

1991 Jones, Haugh & Smith Inc crew uncovered a cast iron monument set by Filmore County Survey in 1981 during a bridge survey L4952 over Deer Creek. Left the monument as found and new ties were taken.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 14, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/09/1994 (DATE) found a LARGE STONE 2.5' DEEP

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/09/1994 (DATE) placed a 5/8" IRON WITH CAP

SKETCH OF REFERENCE TIES

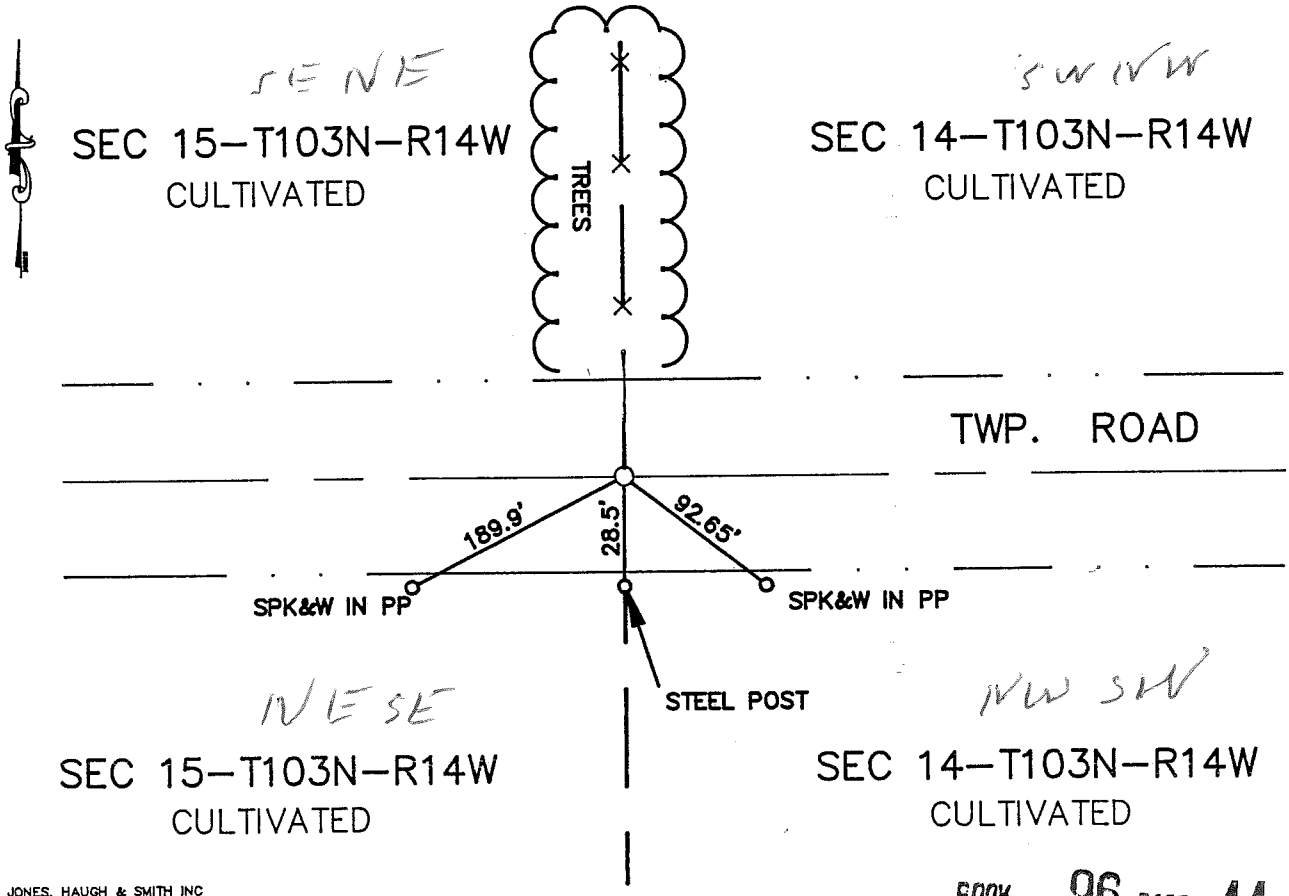


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 44

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 7-18-97
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 29 day of July A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M Davis, Deputy

DOCUMENT NO. 454995

M.H.D. FORM NO. 2105

Book 96 Misc Page 44

W 1/4 Cor SEC 14-103-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1994 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe. Found large stone 2.5' deep under mass of barb wire. Stone was 0.75' under old road bed, 2.5' below road surface. Accepted stone as corner, placed 5/8" iron with cap 13807 on north side of stone and 5/8" iron 16" long with cap 13807 above stone, 4" below road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 14, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/09/1994 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/09/1994 (DATE) placed a 5/8" IRON

SKETCH OF REFERENCE TIES

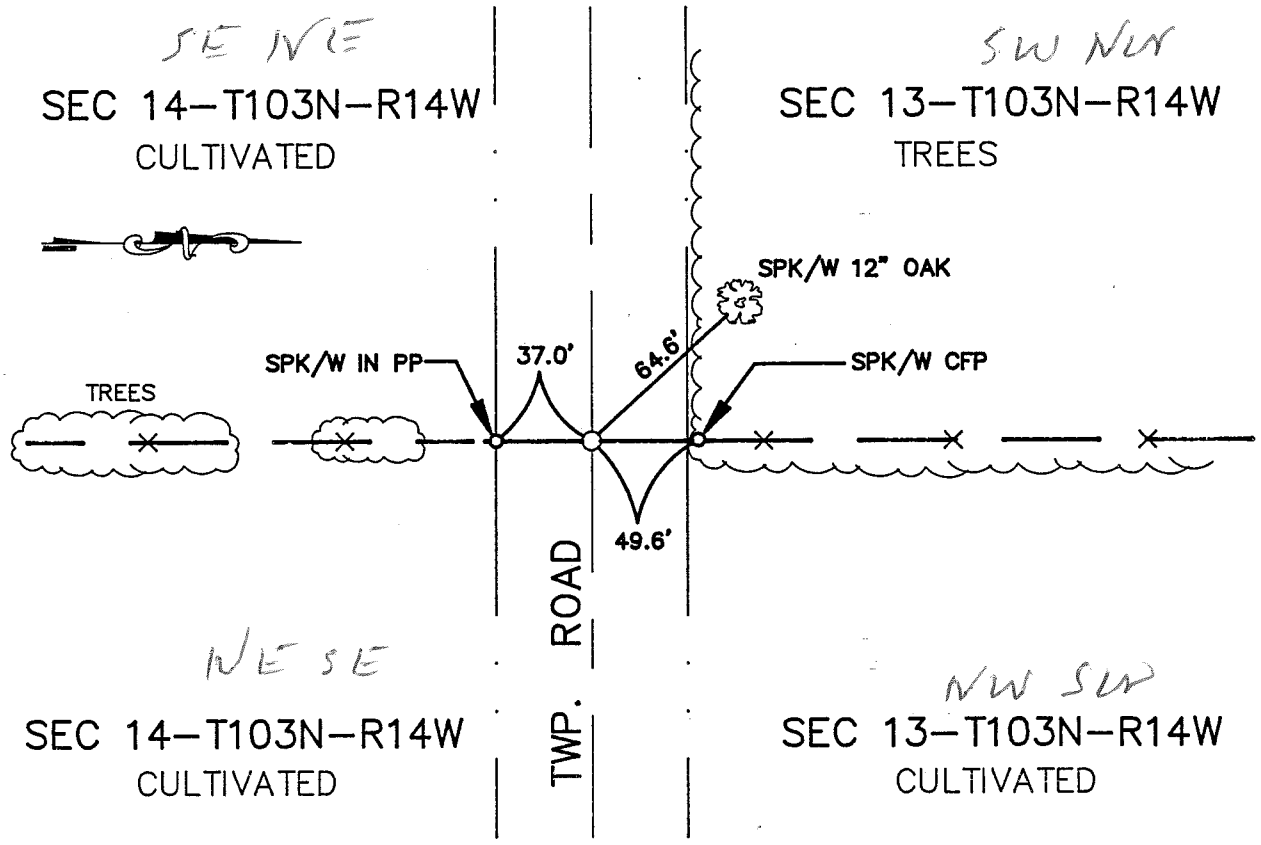


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 46

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-18-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 29 day of July A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 454996

M.H.D. FORM NO. 2105

Book 96 Misc Page 46

E 1/4 Cor SEC 14-103-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1994 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe on centerline of road in line with fence north and south . Dug hole 4' deep 10' long. Found no evidence of corner. Placed stone with 5/8" iron cap number 13807 on north side stone and 5/8" iron with cap 13807 above stone 4" below road surface, on centerline of road and in line with north and south fence.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. P110 "J"

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

(E¼) EAST QUARTER Corner of Section 19, Township 103, Range 14, 5TH P.M.

STATE OF MINNESOTA, County of [redacted]. MOWER.


At the corner location shown on the sketch:

☒ On 6/2/87 (DATE) found a P.K. NAIL IN CENTERLINE OF TRUNK HIGHWAY # 16

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

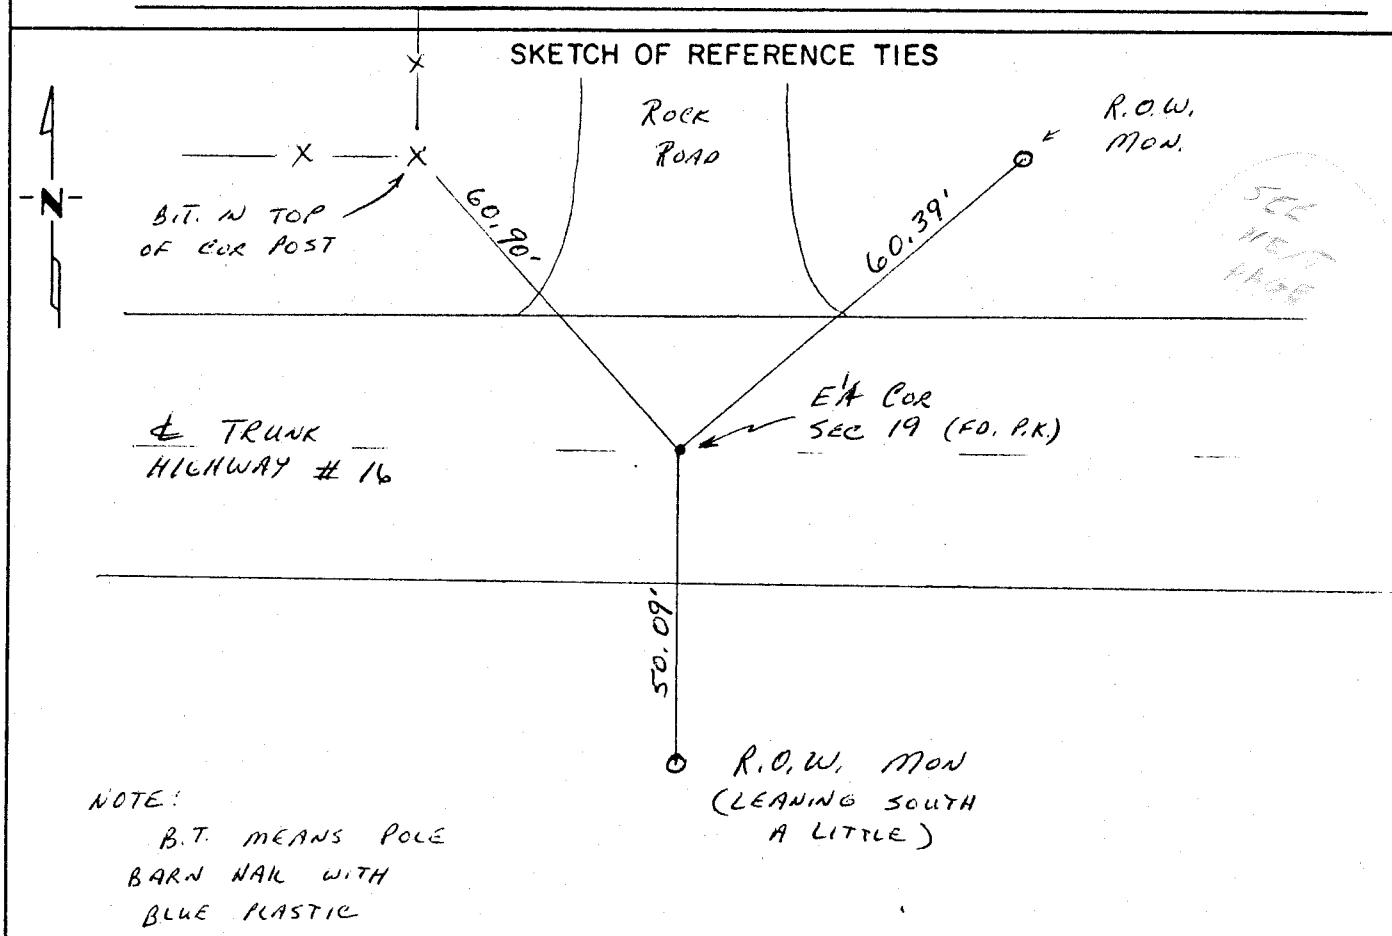


NOTE:
B.T. MEANS POLE BARN NAIL WITH BLUE PLASTIC

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Jerome R. Schwarz (SIGNATURE) 6/23/87 (DATE)

Registration No. 13810

☒ Land Surveyor,

☐ County Surveyor,

OFFICE OF THE COUNTY RECORDER
County of Fillmore

I hereby certify that this document was filed in the Recorder's office at _____ .M. on the _____ day of _____ A.D., 19__

Co. Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Index No. T1E Book P.110

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 19, Township 103N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 1-9-89 (DATE) found a Brass Plug which is also the P.I. 1166 + 89.6.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

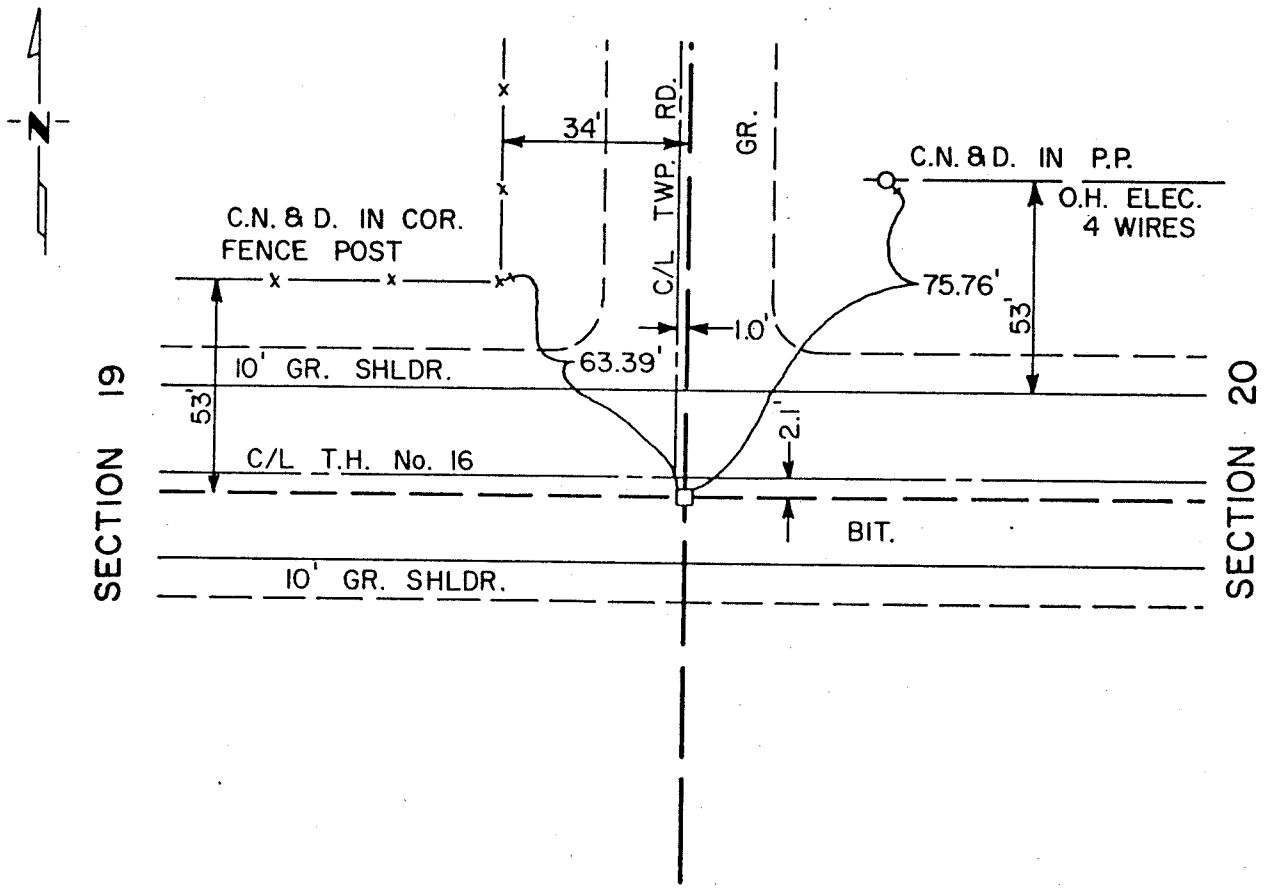


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Donald R. Pankratz (SIGNATURE) 12/16/89 (DATE)

Registration No. 10162

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19___

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

East Quarter of Section 19, Township 103N, Range 14W, 5th P.M.

**Statement of Evidence:**

| | |
|---|---|
| September, 1853 | John Taylor, U.S. Deputy Surveyor, set a post with a handful of charcoal for the corner during the Original Public Land Survey. |
| 1932 | Minnesota Highway Department calls for 2" x 2" wood hub on centerline of T.H. #16 and centerline township road to the north. |
| March 17, 1983 | MN/DOT found a brass plug which is also a P.I. with stationing of 1166 + 89.6. The plug is 2.1' south of centerline T.H. #16 and 1' east of centerline of township to the north. |
| Jan. 9, 1989 | Doug Rude, Yaggy Colby Associates, found a brass plug which checked the MN/DOT 1983 ties. |

An analysis of the record and survey data indicate the occupation centerline of the county road north and state highway east-west are a perpetuation of the Original Public Land Survey Corner. The brass plug used by the MN/DOT is accepted as marking the East Quarter Corner of Section 19.

For further information, contact Yaggy Colby Associates, Rochester, Minnesota.

Index No. P110 "K"

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

(E¼) EAST QUARTER Corner of Section 20, Township 103, Range 19, 5TH P.M.

STATE OF MINNESOTA, County of ~~Fillmore~~ MOWER.


At the corner location shown on the sketch:

☐ On _____ DATE found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 6/2/87 DATE placed a CONCRETE NAIL IN CENTERLINE OF TRUNK HIGHWAY # 16

SKETCH OF REFERENCE TIES

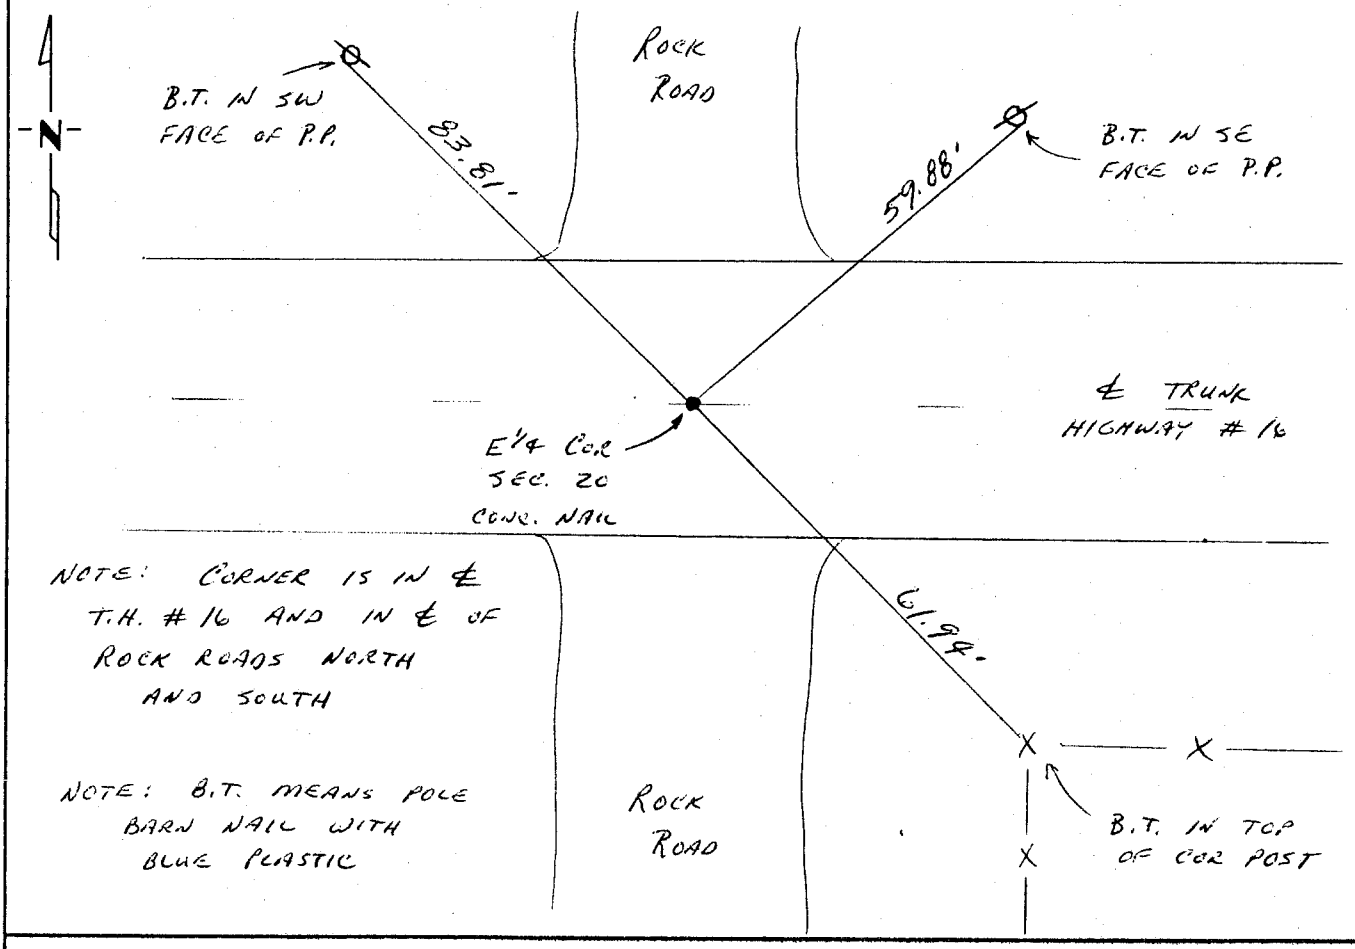


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Jerome R. Hohmann SIGNATURE 6/23/87 DATE

Registration No. 13810

☒ Land Surveyor,

☐ County Surveyor,

OFFICE OF THE COUNTY RECORDER

County of ~~Fillmore~~ MOWER

I hereby certify that this document was filed in the Recorder's office at _____ .M. on the _____ day of _____ A.D., 19__

Co. Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Index No. P110 "O"

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

(N¼) NORTH QUARTER Corner of Section 20, Township 103, Range 14, 5TH P.M.

STATE OF MINNESOTA, County of ~~Fillmore~~ MOWER.


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 6/2/87 (DATE) placed a ½" CAPPED IRON PIPE AT CORNER

SKETCH OF REFERENCE TIES

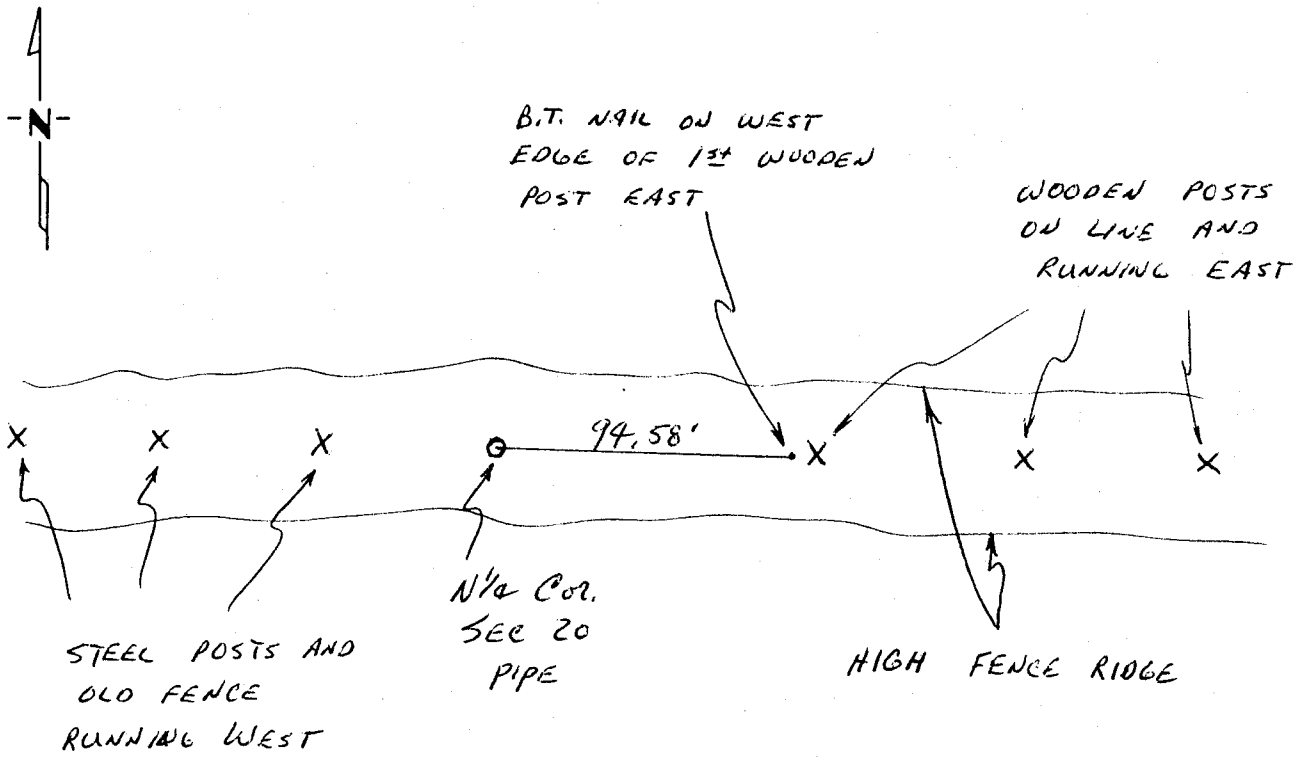


NOTE: B.T. MEANS POLE BARN NAIL WITH BLUE PLASTIC

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Norm R. Schwarz (SIGNATURE) 6/23/87 (DATE)

Registration No. 13810

☒ Land Surveyor,

☐ County Surveyor,

OFFICE OF THE COUNTY RECORDER
County of ~~Fillmore~~ MOWER

I hereby certify that this document was filed in the Recorder's office at _____ .M. on the _____ day of _____ A.D., 19__

Co. Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 22, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/06/2003 (DATE) placed a 1/2" IRON PIPE

SKETCH OF REFERENCE TIES

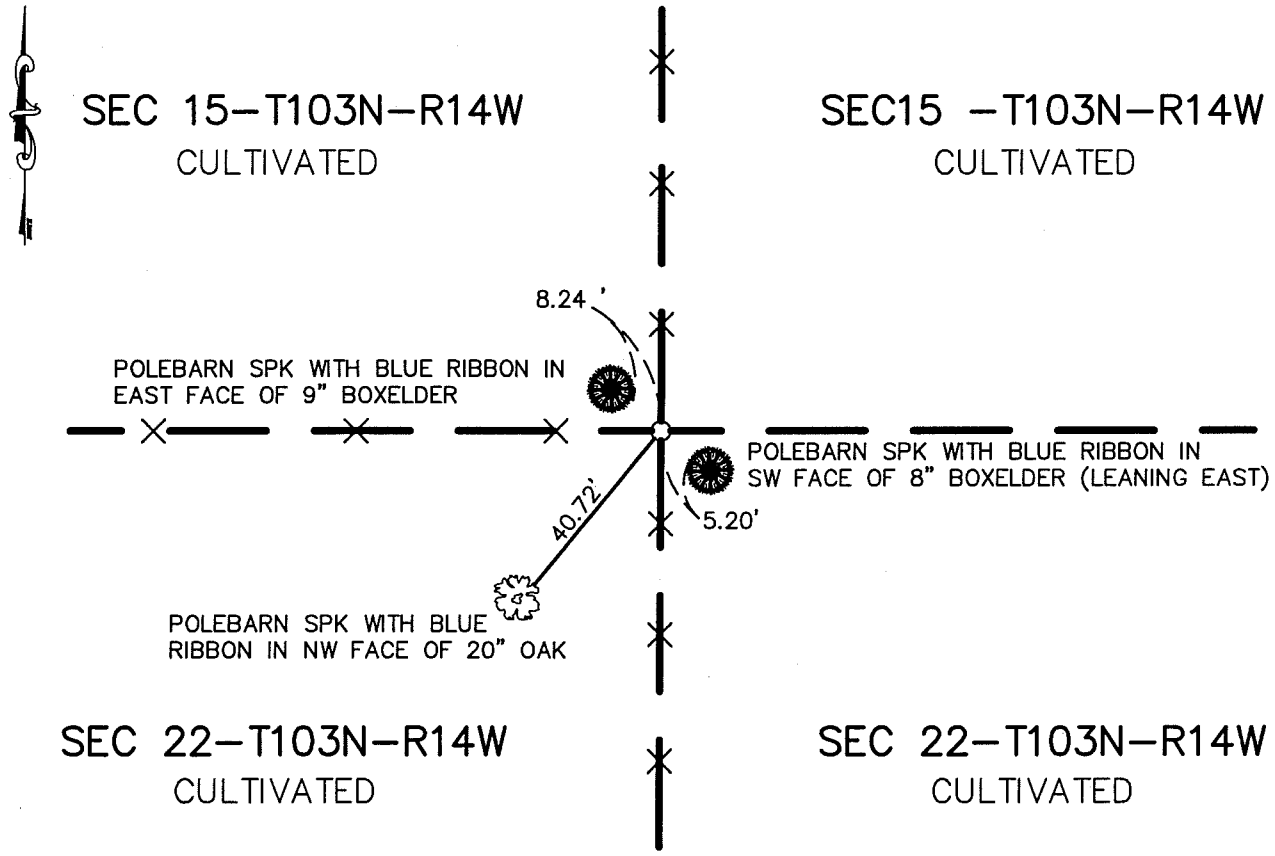


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-3-03

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

N 1/4 Corner Section 22-T103N-R14W

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder

2002 Jones Haugh and Smith crew traversed through section 22-T103N-R14W and tied in existing corners, occupation and fence lines and computed location of the N ¼ corner to be at intersection of fence lines north, south and west.

2003 Schwarz Land Surveying crew dug by hand at the intersection of line fence North, South, and West. Found nothing. Placed a ½" iron pipe at Jones Haugh and Smith computed position at the intersection of fences and took ties.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

BOOK 25 PAGE 144 TIE BOOK R. 96

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner to Section 23 Township 103N Range 14W No. 14


STATE OF MINNESOTA,

County of Mower S.S.


I hereby certify that on the 23rd day of November, 1966, that I, Leonard Sankstone, a Registered Land Surveyor, found the Northeast corner of Section 23, T103N, R14W, which was evidenced by 6"-12" dia x 24" stone monument 24" below grade, and I further certify that to perpetuate the location of such corner I did, at the exact location thereof, place a permanent marker consisting of 1" x 36" iron rod.

I further certify that I established 5 references or witness monuments consisting of 4 trees and 1 fence post which reference or witness monuments are located in the manner following.

N 11.16 ft. Fence Post (N&B cap)
E 1.75 ft. 10" Triple Elm (N&B cap)
SE 59.36 ft. 6" Oak (N&B cap)
SW 40.54 ft. 8" Quad Boxelder (N&B cap)
W 29.38 ft. 10" Boxelder (N&B cap)



SECTION

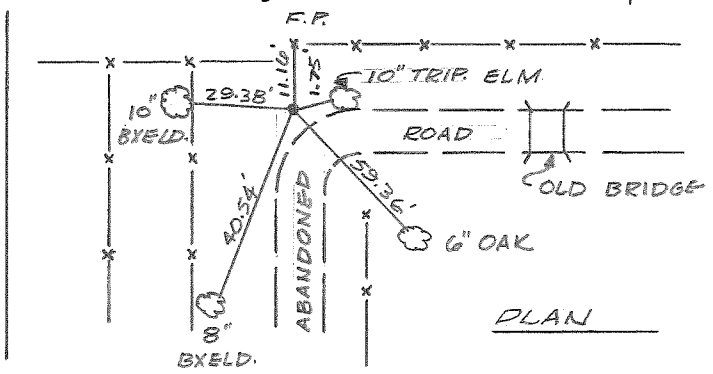

PLAN

Dated at Rochester, Minnesota, this 1st day of December, 1966.

Distance to N1/4 Sec. 23 = 2654.70

Leonard Sankstone

Leonard Sankstone

Registered Land Surveyor No. 5325

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that the within instrument was filed in this office for record on the _____ day of _____ A.D., 19____.

280015

11 min. a.m. 8 Dec 25 66
Book 144
Register of Deeds
By _____ Deputy

_____
Register of Deeds

BOOK 25 PAGE 146

TIE BOOK p86

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


N 1/4 Corner to Section 23 Township 103N Range 14W No. 16

STATE OF MINNESOTA,

County of Mower S.S.

I hereby certify that on the 25th day of November, 1966, that I, Leonard Sankstone, a Registered Land Surveyor, ~~xxxxx~~ set the North quarter corner of Section 23, T103N, R14W, which was evidenced by one half the distance between the NE corner and NW corner of Section 23 and I further certify that to perpetuate the location of such corner I did, at the exact location thereof, place a permanent marker consisting of chiseled X on west bridge truss.

I further certify that I established 3 references or witness monuments consisting of 2 trees, 1 power pole, which reference or witness monuments are located in the manner following.

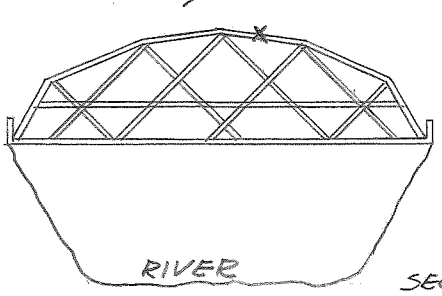



SECTION

NW 148.40 ft.
24" Twin Oak (N&B cap)

SE 172.72 ft.
Power Pole (N&B cap)

SW 143.59 ft.
12" Twin Oak (N&B cap)

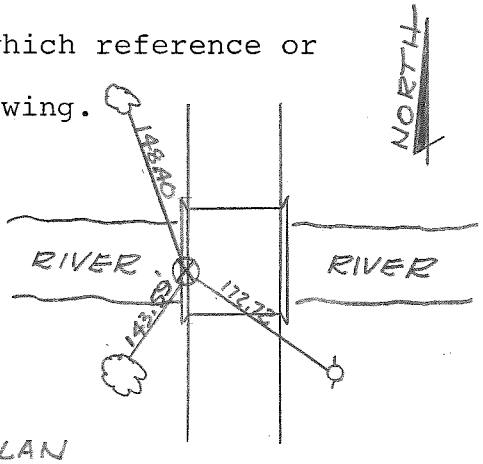


PLAN

Dated at Rochester, Minnesota, this 1st day of December, 1966.

Distance to NE cor. Sec. 23 = 2654.70'
Distance to NW cor. Sec. 23 = 2654.70'

Leonard Sankstone

Leonard Sankstone

Registered Land Surveyor No. 5325

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that the within instrument was filed in this office for record on the _____ day of _____ A.D., 19____.

280017

11 min a 8 Dec 66 23
146
Boyle M Epl
Register of Deeds
By Mark Epl Deputy

Register of Deeds

"I" p.86 TIE BOOK

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NW Corner to Section 23 Township 103N Range 14W No. 15

STATE OF MINNESOTA,


County of Mower S.S.

I hereby certify that on the 23rd day of November, 1966, that I, Leonard Sankstone, a Registered Land Surveyor, found the Northwest corner of Section 23, T103N, R14W, which was evidenced by 6"x6"x18" stone monument over a 1" bolt, 36" below grade, and I further certify that to perpetuate the location of such corner I did, at the exact location thereof, place a permanent marker consisting of 3/8"x24" iron rod projecting 6". I further certify that I established 2 references or witness monuments consisting of 2 trees which reference or witness monuments are located in the manner following.

NE 34.43 Ft. 18" Twin Oak (N&B cap)
NW 55.68 Ft. 24" Oak (N&B cap)




SECTION

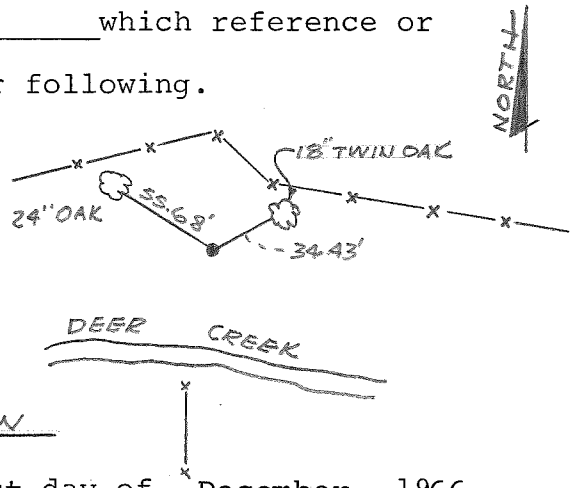


PLAN

Dated at Rochester, Minnesota, this 1st day of December, 1966.

Distance to N1/4 Sec. 23 = 2654.70

Leonard Sankstone

Leonard Sankstone

Registered Land Surveyor No. 5325

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that the within instrument was filed in this office for record on the _____ day of _____ A.D., 19____.

Office of Register of Deeds } ss.
County, Minnesota }
I hereby certify that the within instrument was filed
for record on the ____ day of ____ 19__
at ____ o'clock ____ M. and was duly recorded
in Book ____ of ____ on page ____

280016

11 mins at 8:45 Exc 25 66
Pauline Eyl
Leland Eyl

Register of Deeds

BOOK 25 PAGE 145

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 23, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/02/1996 (DATE) found a WOOD FENCE POST

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/02/1996 (DATE) placed a 5/8" IRON CAPPED 13807

SKETCH OF REFERENCE TIES

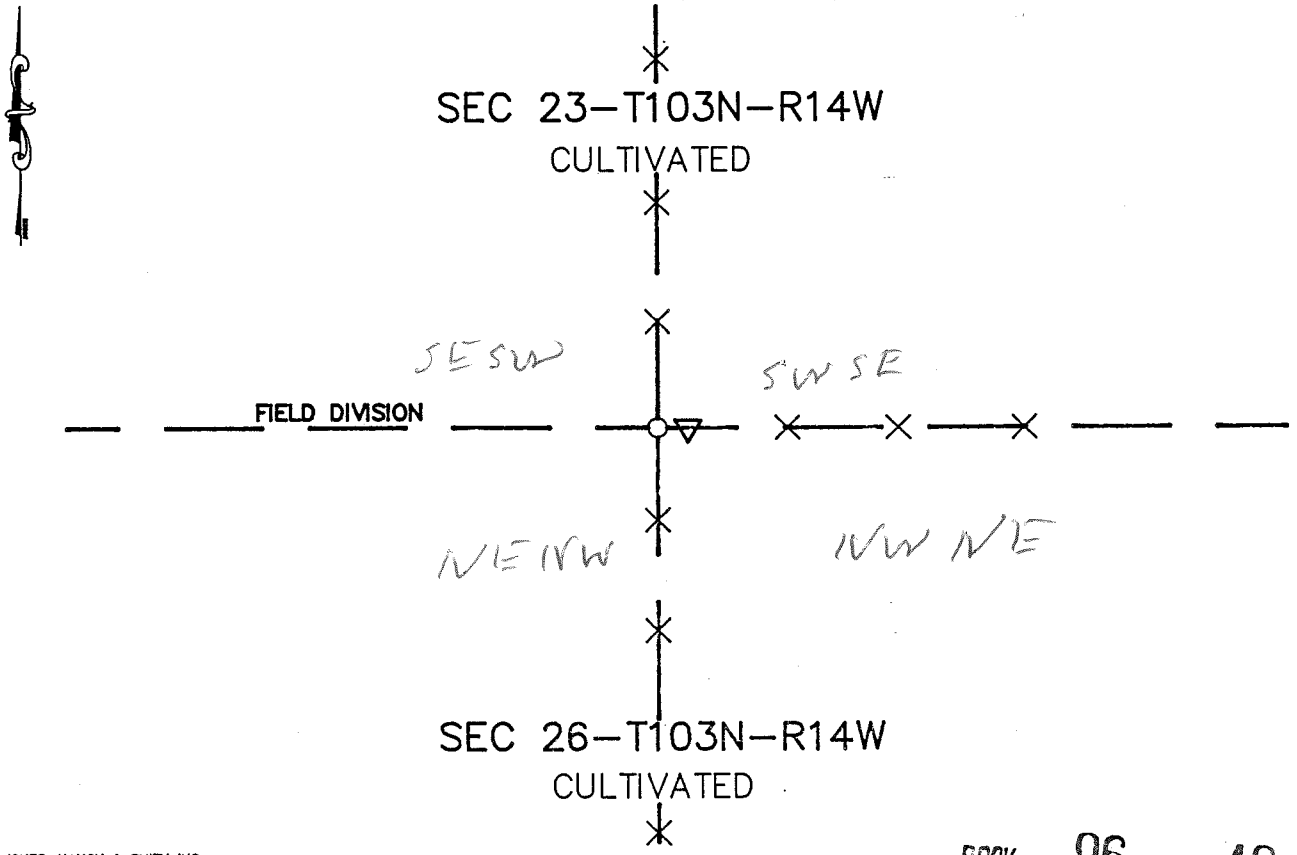


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 48

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 7-18-97 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 29 day of July A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 454997

M.H.D. FORM NO. 2105

Book 96 Misc Page 48

S 1/4 Cor SEC 23-103-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found wood fence post at intersection of N-S fence and fence east. Set 5/8" x 16" iron on west side of wood post cap no. 13807.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 27, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/06/1997 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/06/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

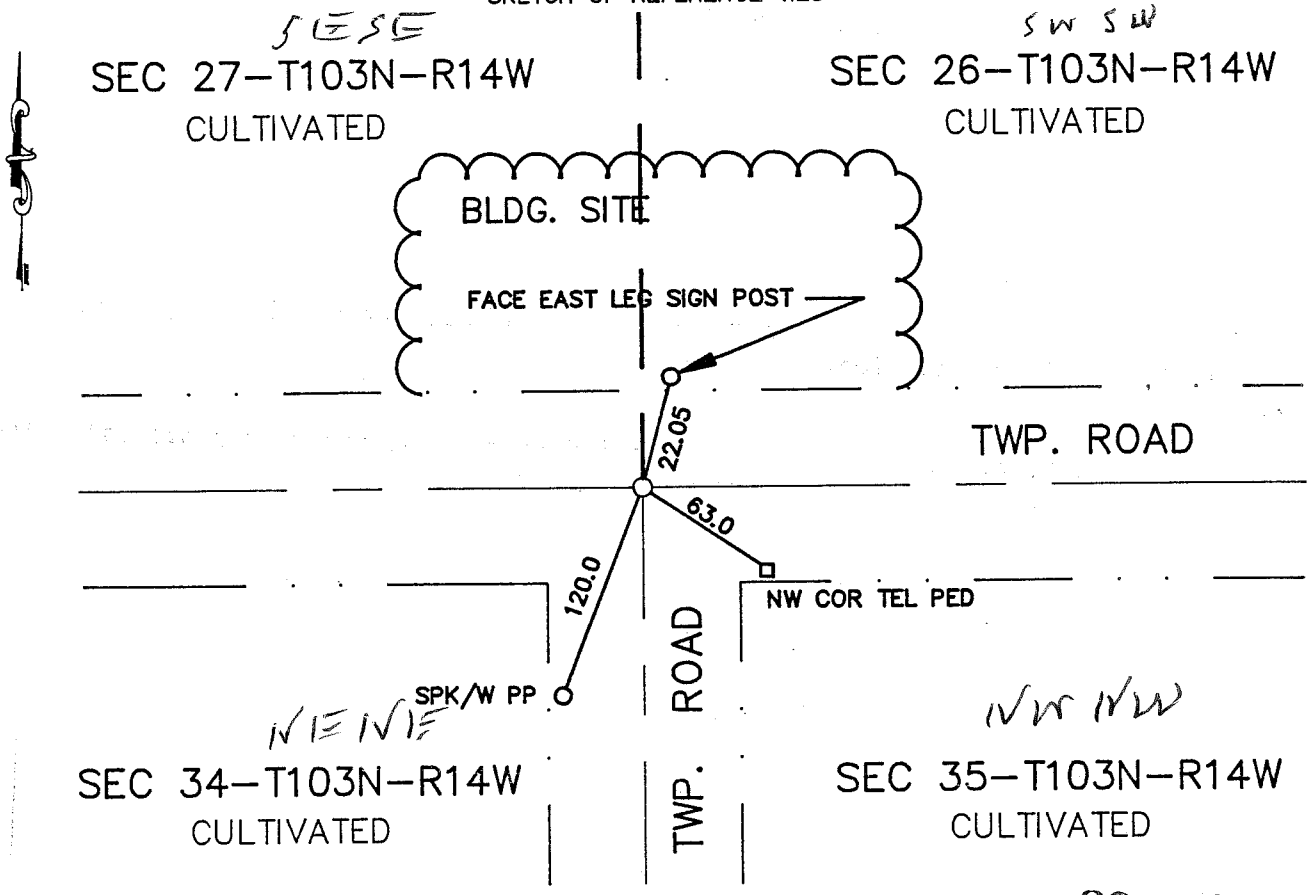


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 465

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-9-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 10 day of Oct A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 456783

M.H.D. FORM NO. 2105

Book 96 Misc Page 465

SE Cor SEC 27-103-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the county backhoe at the intersection of centerlines of township roads E-W and south. Found no evidence of original PLS corner. Placed a cast iron monument at the intersection of centerlines 0.4' below road surface. While in process of digging corner a cable was cut. The cable was not marked. US West cable was marked 100' east of intersection crossing the road N-S. Assumed cable to be an old one. Farm house still had a phone connection.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

BOOK 96 PAGE 466

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 27, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/05/1997 (DATE) found a STONE WITH REMAINS OF WOOD STAKE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/05/1997 (DATE) placed a CAPPED 5/8" IRON

SKETCH OF REFERENCE TIES

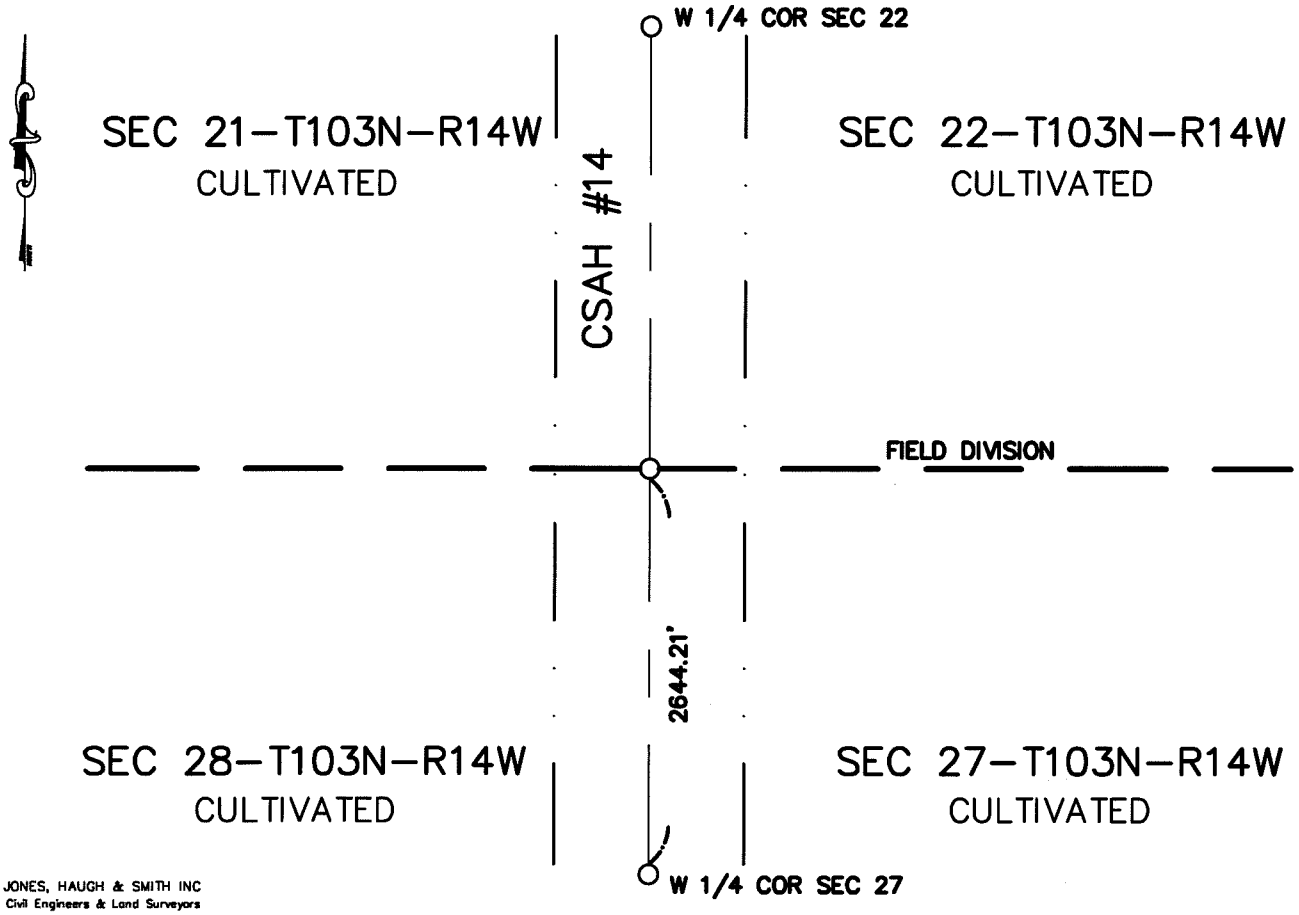


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 10-5-00
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NW Cor SEC 27-103-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the county backhoe at CL of township road N-S. Uncovered a stone 4.0'+/- below road surface with remains of wood stake on north side. Set a 5/8" iron capped 13807 on the north side of stone found. Placed a 5/8" iron capped 13807 above stone 0.4' below road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 28, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/05/1997 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/05/1997 (DATE) placed a –

SKETCH OF REFERENCE TIES

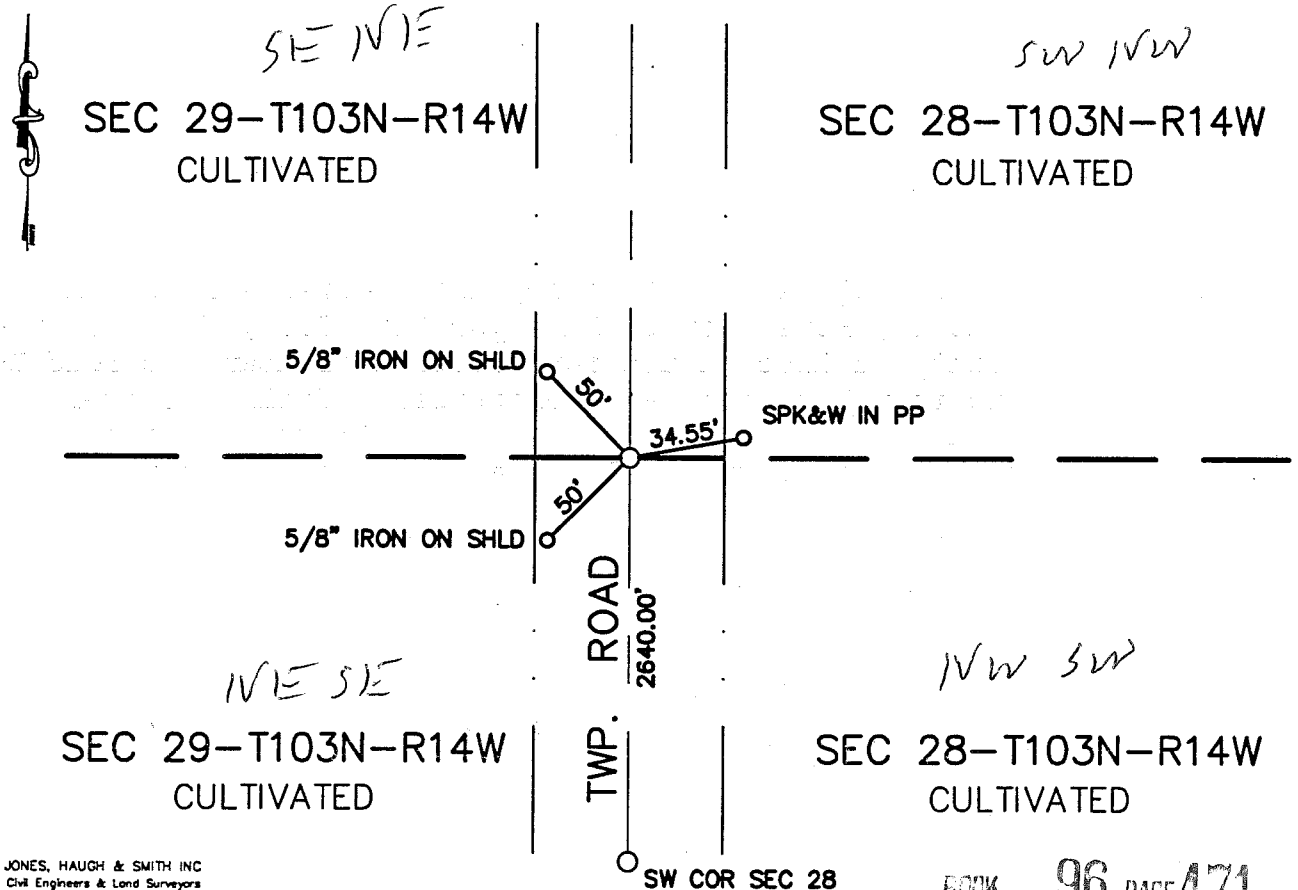


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 471

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] 10-9-97
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF ~~THE~~ COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P .M. on the 10 day of Oct A.D., 1997

COUNTY RECORDER Charles Enger
By Susan M. Davis, Deputy
DOCUMENT NO. 456786

M.H.D. FORM NO. 2105

Book 96 Misc Page 471

W 1/4 Cor SEC 28-103-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the county backhoe at the centerline of township road N-S and in line with field division west at 2640'+/- from the SW corner of section 28. Uncovered a 3'x1'x1/2' cast iron 3.0' deep and 2 feet below old road bed. Accepted iron as a perpetuation of original PLS corner and placed a 5/8" iron capped 13807 on the north side of found iron. Placed a cast iron monument over iron found 0.40' below road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 28, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/06/1997 (DATE) found a DRILL BIT OVER STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/06/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

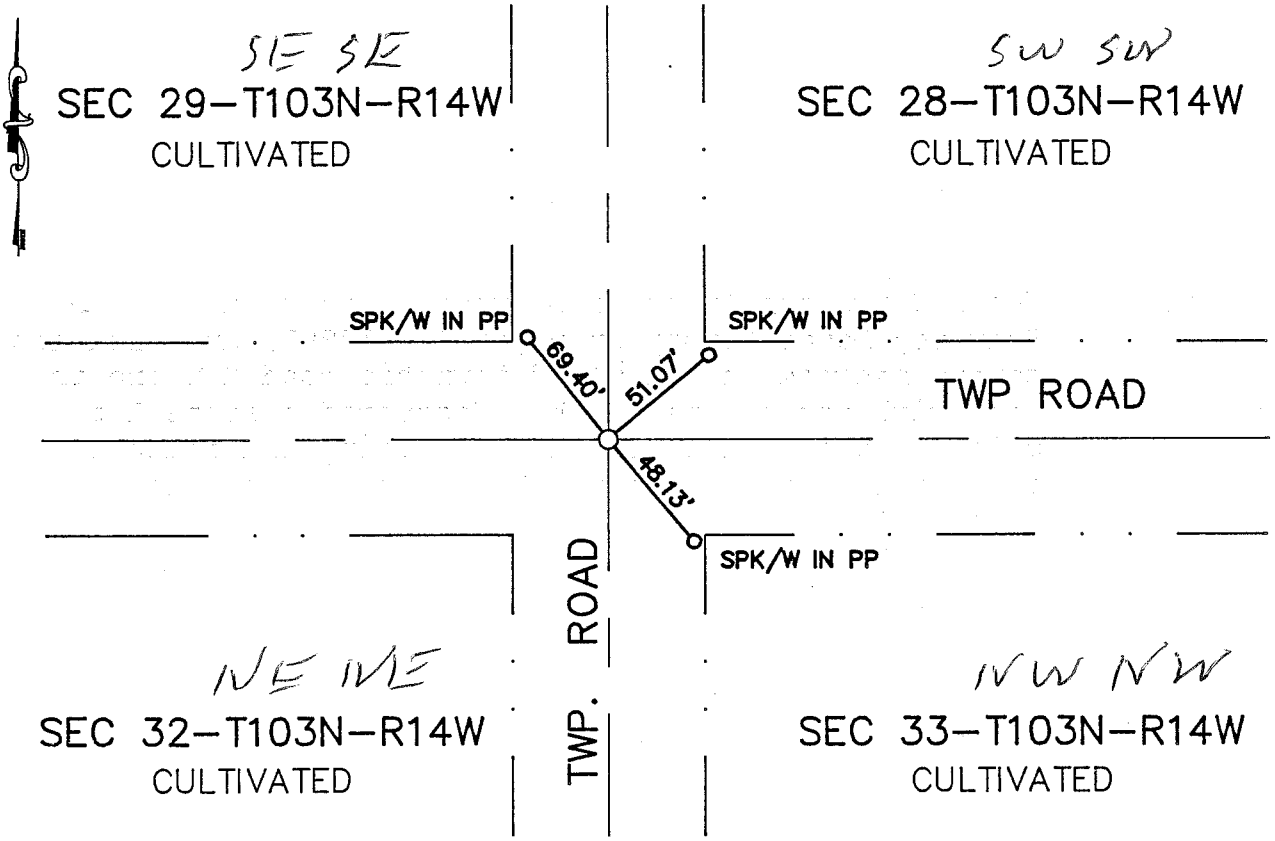


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 469

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-9-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 p .M. on the 10 day of Oct A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 456785

M.H.D. FORM NO. 2105

Book 96 Misc Page 469

SW Cor SEC 28-103-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the county backhoe at the intersection of township road E-W and township road N-S. Uncovered a drill bit over stone. Placed a 5/8" iron capped 13807 on the north side of bit found. Placed a cast iron monument over monuments found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 28, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/05/1997 (DATE) found a STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/05/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

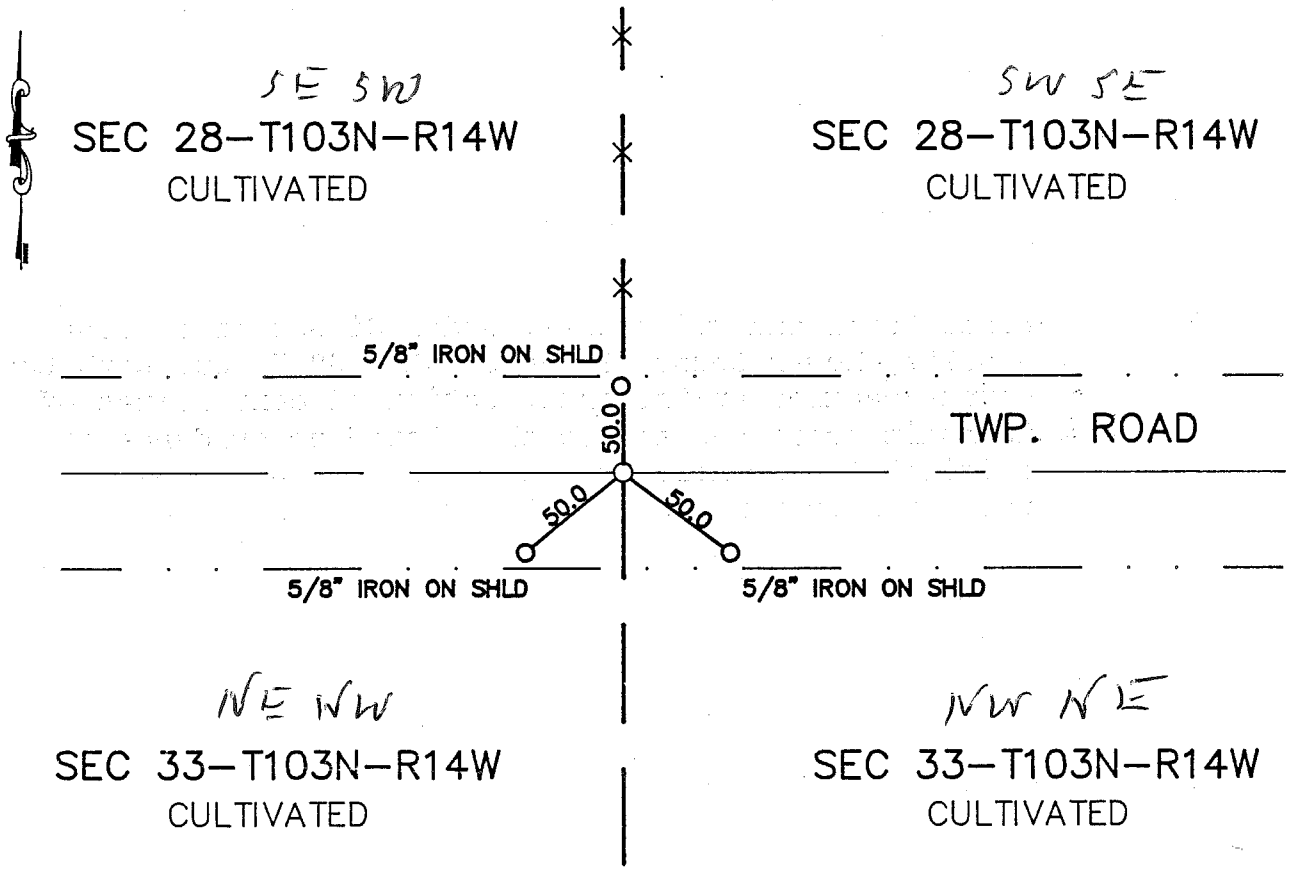


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 467

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-9-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 10 day of Oct A.D., 1997

COUNTY RECORDER Charles Evgen

By Susan M. Davis, Deputy

DOCUMENT NO. 456784

M.H.D. FORM NO. 2105

Book 96 Misc Page 467

S 1/4 Cor SEC 28-103-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the county backhoe at the CL of township road E-W and in line with fence line north. Uncovered a stone 1.5' below road surface. Continued digging and found no other evidence of original PLS corner. Accepted stone as true PLS corner and set a 5/8" iron capped 13807 on the north side of stone. Placed a cast iron monument above stone 0.4' below road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. P 110 "L"

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

(N¼) NORTH QUARTER Corner of Section 29, Township 103, Range 14, 5TH P.M.

STATE OF MINNESOTA, County of [redacted]. MOWER.


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 6/2/87 (DATE) placed a ½" CAPPED IRON PIPE AT CORNER

SKETCH OF REFERENCE TIES

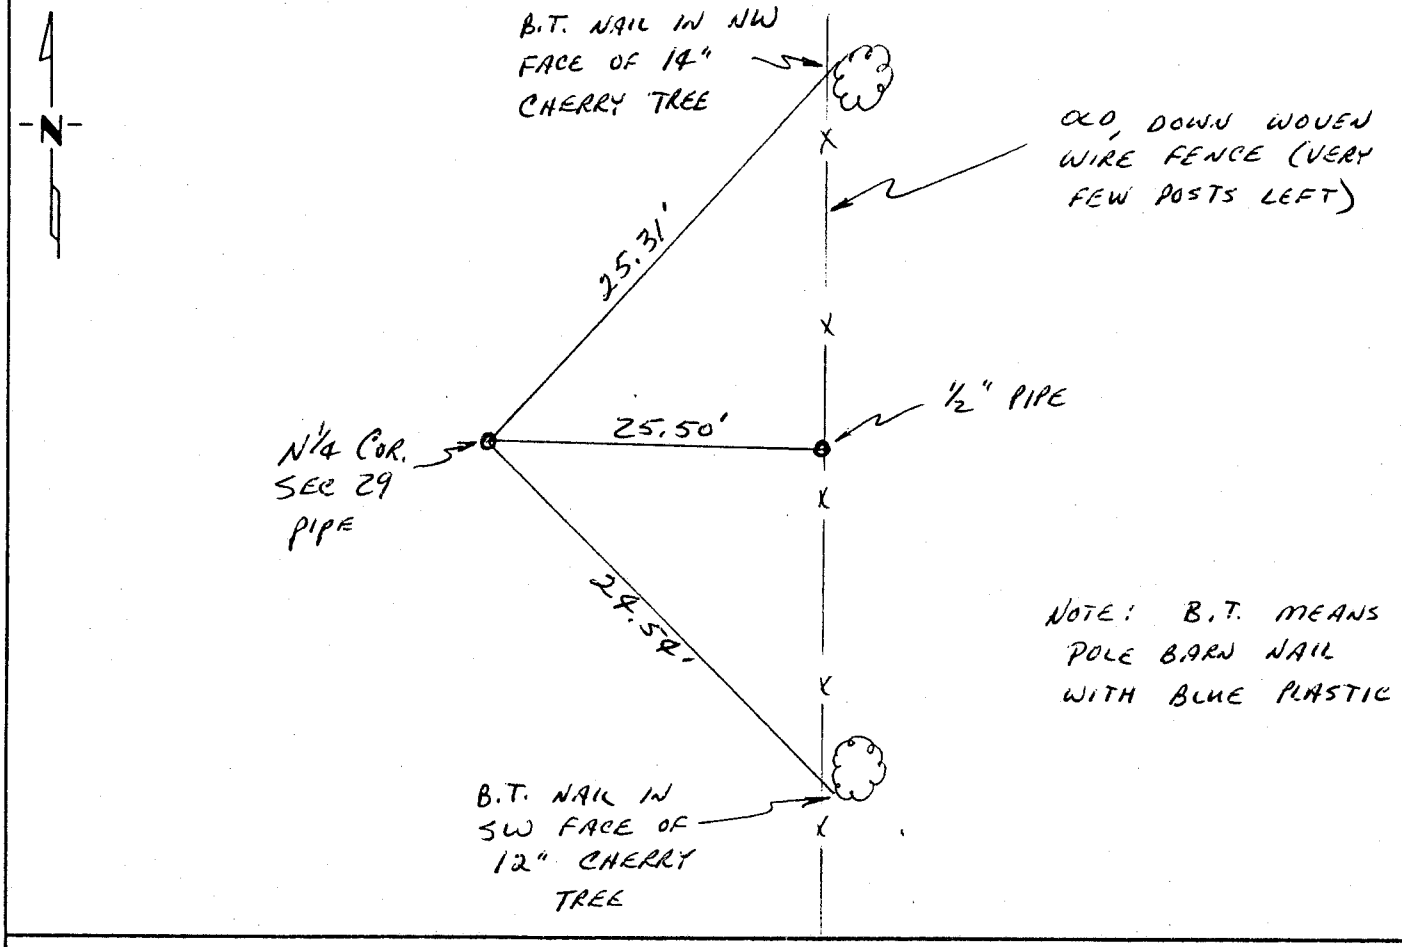


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James R. Schwarz (SIGNATURE) 6/23/87 (DATE)

Registration No. 13810

☒ Land Surveyor,

☐ County Surveyor,

OFFICE OF THE COUNTY RECORDER
County of Fillmore

I hereby certify that this document was filed in the Recorder's office at _____ .M. on the _____ day of _____ A.D., 19__

Co. Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Index No. P110 "P"

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

(NE) NORTHEAST Corner of Section 29, Township 103, Range 14, 5TH P.M.

STATE OF MINNESOTA, County of ~~FILLMORE~~ MOWER.


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 6/2/87 (DATE) placed a 1/2" CAPPED IRON PIPE AT CORNER

SKETCH OF REFERENCE TIES

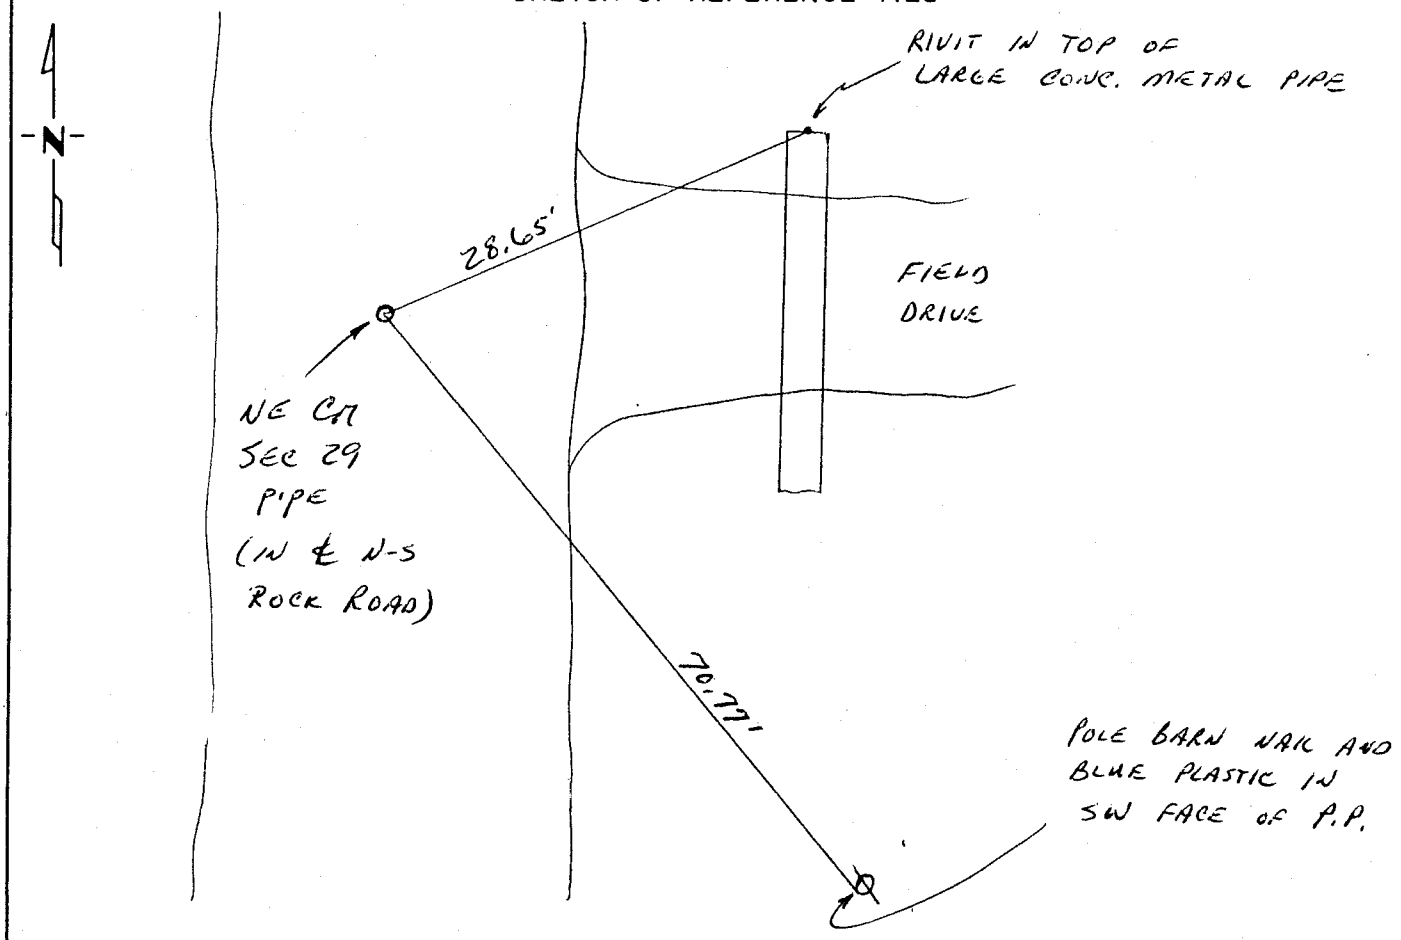


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Jerome R. Schwarz (SIGNATURE) 6/23/87 (DATE)

Registration No. 13810

☒ Land Surveyor,

☐ County Surveyor,

OFFICE OF THE COUNTY RECORDER
County of Fillmore

I hereby certify that this document was filed in the Recorder's office at _____ .M. on the _____ day of _____ A.D., 19__

Co. Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Index No. P110 "N"

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

(NE) NORTHEAST Corner of Section 30, Township 103, Range 14, 5TH P.M.

STATE OF MINNESOTA, County of [redacted]. MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 6/2/87 (DATE) placed a ½" CAPPED IRON PIPE AT CORNER

SKETCH OF REFERENCE TIES

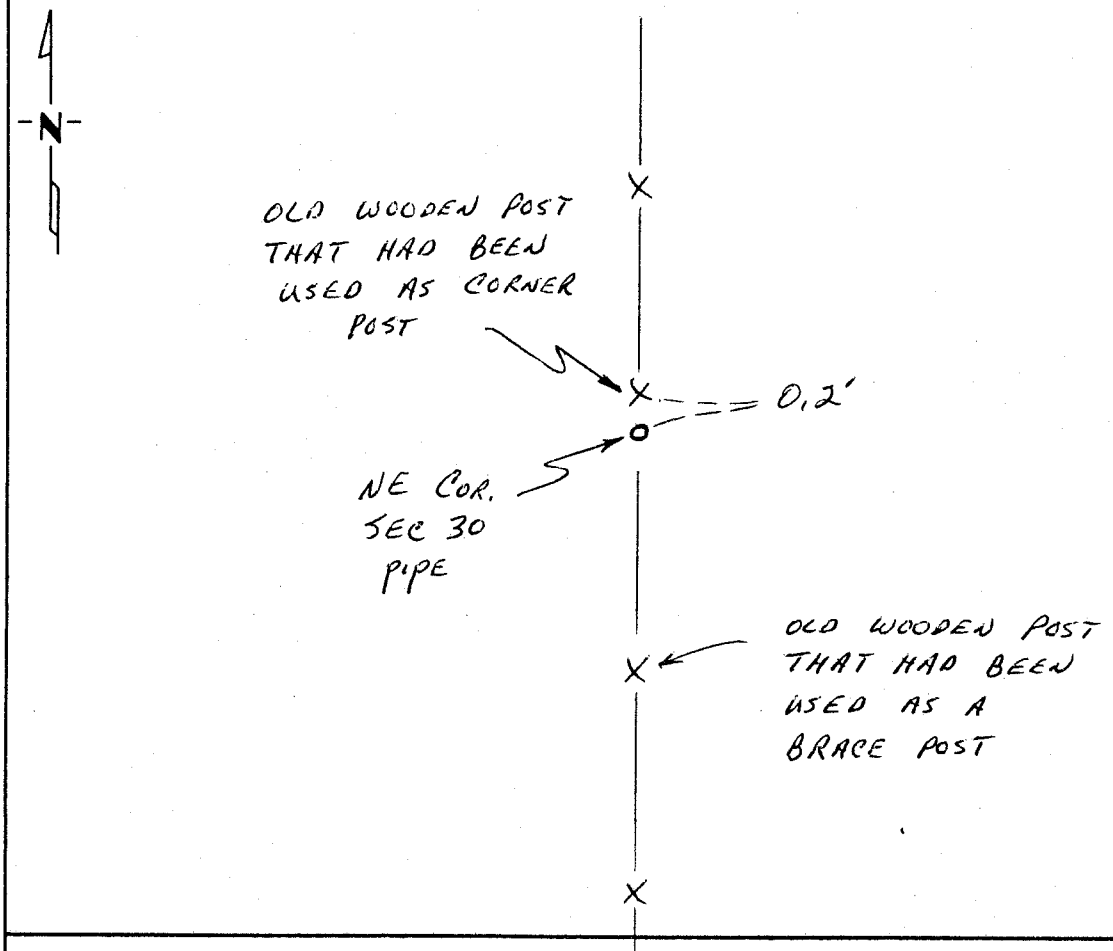


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James R. Schwarz (SIGNATURE) 6/23/87 (DATE)

Registration No. 13810

☒ Land Surveyor,

☐ County Surveyor,

OFFICE OF THE COUNTY RECORDER
County of Fillmore

I hereby certify that this document was filed in the Recorder's office at _____ .M. on the _____ day of _____ A.D., 19__

Co. Recorder _____

By _____, Deputy

DOCUMENT NO. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 30, Township 103, Range 14, 5 P.M. "I" R. 110

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 5-1-87 found FOUND NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 5-1-87 placed 3/4" X 24" PIPE & CAP STAMPED RJO 11009 AT FENCE EXTENSION INTERSECTION

## SKETCH OF REFERENCE TIES

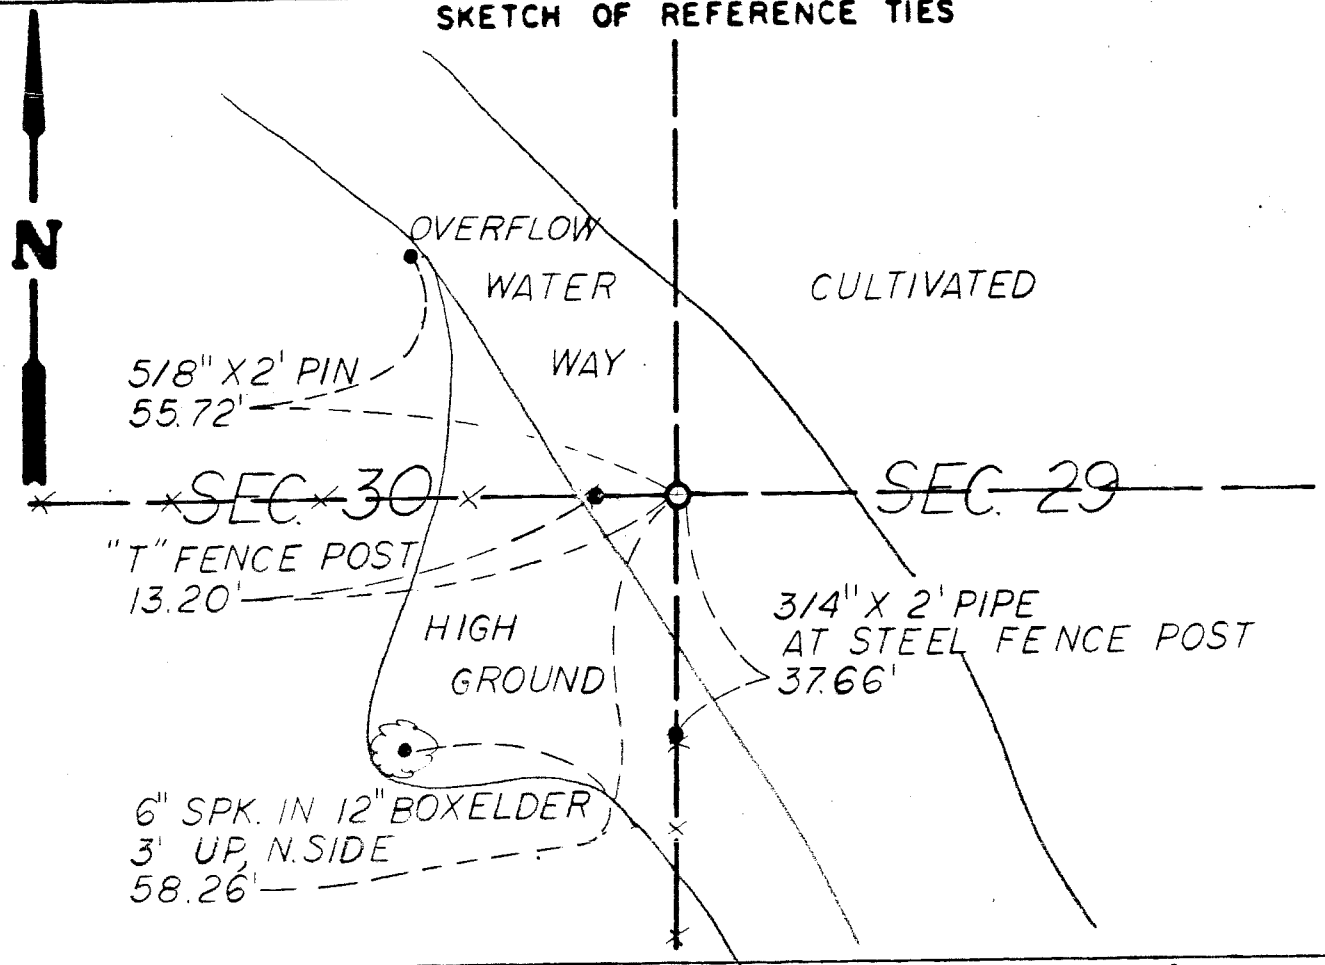


Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson (Signature) 7-30-87 (Date)

Registration No. 11009

☒ Land Surveyor ☐ Prof. Engineer
☐ County Surveyor ☐ County Engineer


Zenk·Read·Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689


OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

EAST QUARTER CORNER SECTION 30, TOWNSHIP 103 NORTH, RANGE 14 WEST, 5 P.M.

Sept., 1853 — John Taylor, Deputy Surveyor, set 1/4 Sec. post and deposited a handful of charcoal. Raised a mound of earth and sod. Cut a trench and planted Osage Orange seeds E & W bet. pits & trench.

1987 — Jerry Schwarz, R.L.S. #13810, made an electronic survey and analysis of Section 29. No occupation lines were able to help determine the location of the corner.

1987 — Ronald J. Olson, R.L.S. #11009, searched the area with a magnetic locator and made an electronic survey of Section 30 to analize the occupation lines and help determine the location of the corner. An old fence line extended from the West 1/4 Corner easterly through the section to the area near the corner. The remains of an old fence line ran south from the area of the corner. A field division went east from the corner.

An analysis of the record and survey data gave no indication of monument perpetuation. The corner was set at the intersection of the fence line across Section 30 with the fence line south of the corner as evidence of the obliterated position. The area had been cultivated and was under 8 inches of water. The corner is 39.4 feet South and 35.2 feet East of the "Lost" location.

For details of the analysis and survey data contact Zenk, Read, Trygstad & Associates, Inc., Albert Lea, MN.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 31, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/29/2002 (DATE) found a CONCRETE MONUMENT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/29/2002 (DATE) placed a 5/8" IRON ABOVE MONUMENT FOUND

SKETCH OF REFERENCE TIES

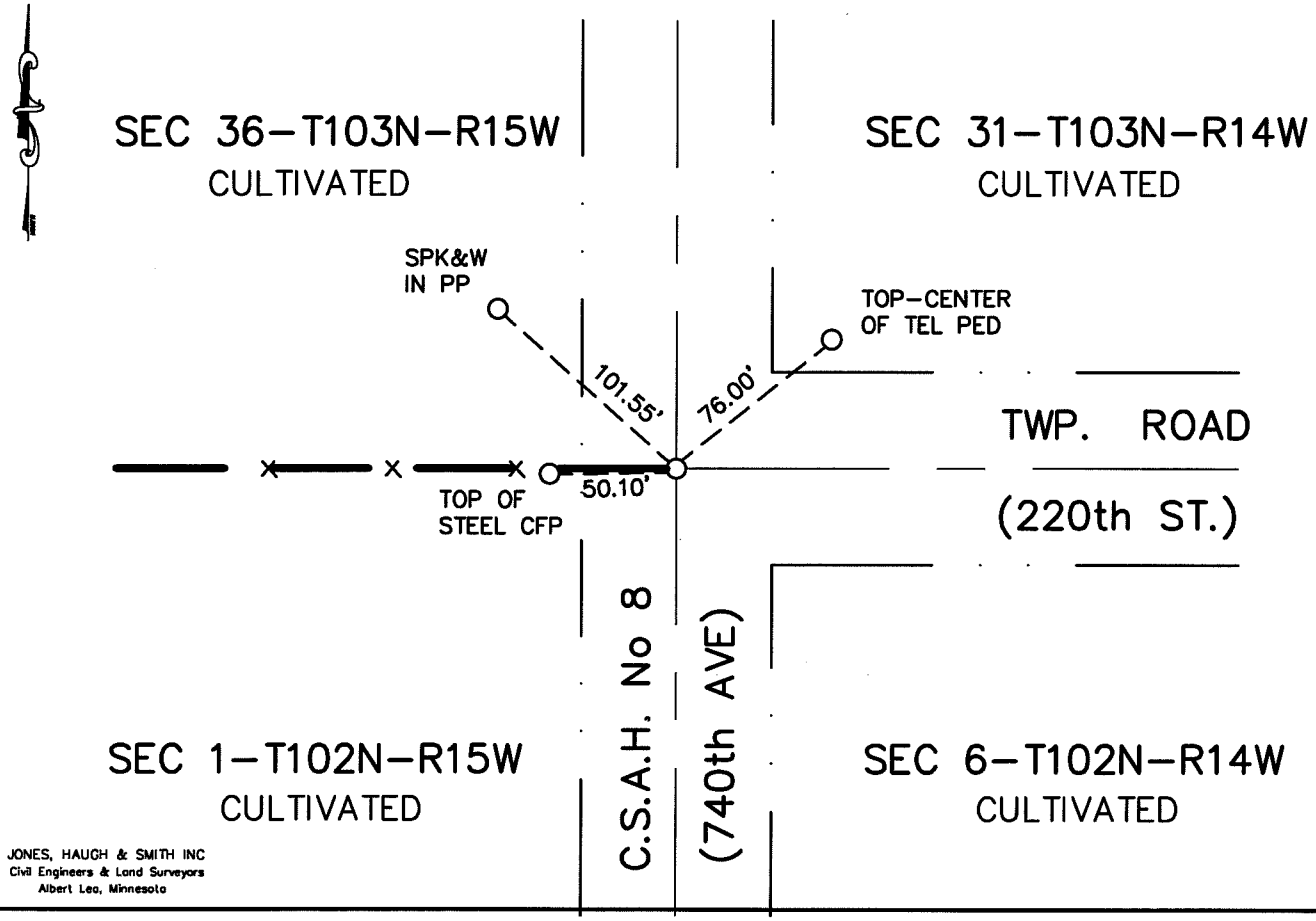


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-5-02

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SW Cor Sec 31-103-14

Deputy Surveyor John Ball of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1947 Mower County Highway Dept. road plan shows a concrete monument inplace at this location.

1955 Mower County surveyor uncovered a concrete monument at this location.

2002 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at location of signal from magnetic locator and found an iron pin in a concrete monument. The monument found is in agreement with the 1947 road plan location and the 1955 records and is accepted as a perpetuation of the original PLS corner. Placed a 5/8" iron capped RLS 13807 above monument found, and took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 31, Township 103, Range 14W, 5 P.M.

**STATE OF MINNESOTA,** County of MOWER


At the corner location shown on the sketch:

On 7-29-91 found A WOOD POST ON WEST SIDE OF 3' BOULDER 2.8' BELOW THE SURFACE.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 7-29-91 placed A 3/4" REBAR AND COUNTY CAP OVER THE POST.

## SKETCH OF REFERENCE TIES

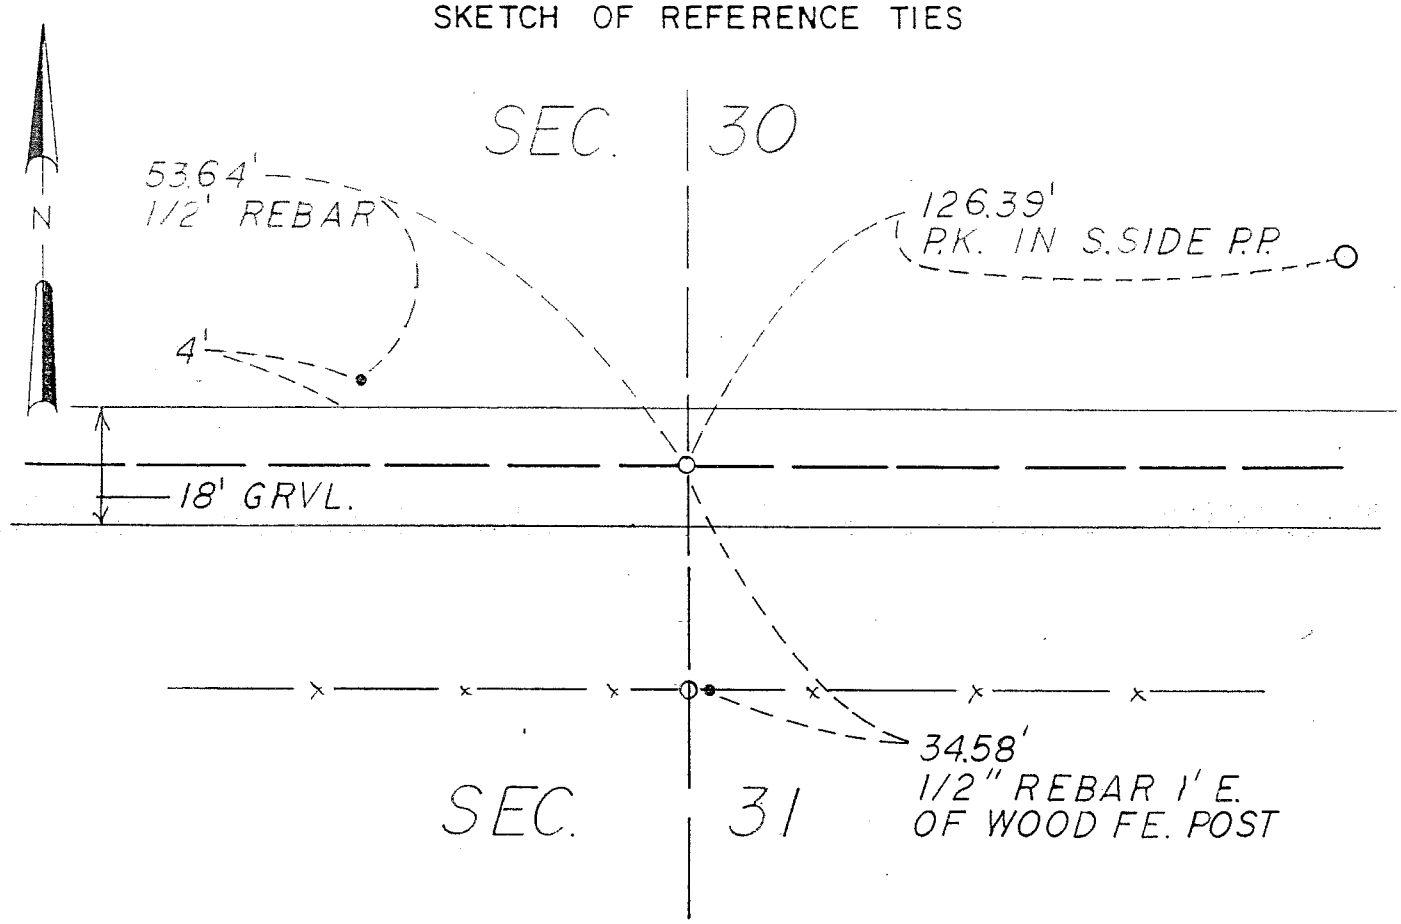


Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
12-31-91 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof. Engineer
☐ County Surveyor ☐ County Engineer


Zenk•Read•Trygstad & ASSOCIATES, INC.
Engineers/Architects/Land Surveyors/Planners
Box 689, Albert Lea, MN 56007 507/373-0689


OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A. D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

NORTH QUARTER CORNER SECTION 31, TOWNSHIP 103 NORTH, RANGE 14 WEST, 5 PM

| | |
|---|---|
| September, 1853 | John Ball, Deputy Surveyor, set quarter section post and deposited a handful of charcoal and raised a mound of earth and sod. Cut a trench and planted Osage Orange seeds north and south between pits and trench during the original Public Land Survey. |
| July 29, 1991 | A Zenk Read Trygstad & Associates, Inc. survey crew excavated with a backhoe a trench 3 feet north and 4 feet south of centerline by 5 feet east and 4 feet west of the occupation line south by 3.5 feet deep and found a wood fence post on the east side of a 3 foot diameter boulder. A hole was also excavated at the Lost location and nothing was found. |
| | An analysis of the record data gives no indication of origin of the boulder or wood post. The existing occupation lines agree with the location of the post. The post is about 13 feet east of the lost position. Since the post with boulder is evidence of long standing use as the corner before the construction of the Township Road, it is accepted as the location of the original Public Land Survey Corner. |

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 31, Township 103, Range 14W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch;

On 7-29-91 found A 1/2" REBAR IN CONC. MON. 2.8' FEET BELOW THE SURFACE.

☐ left monument as found, ☐ lowered monument, ☒ removed monument (explain)

On 7-29-91 placed A COUNTY CAP IN PLACE OF THE CONCRETE MONUMENT.

## SKETCH OF REFERENCE TIES

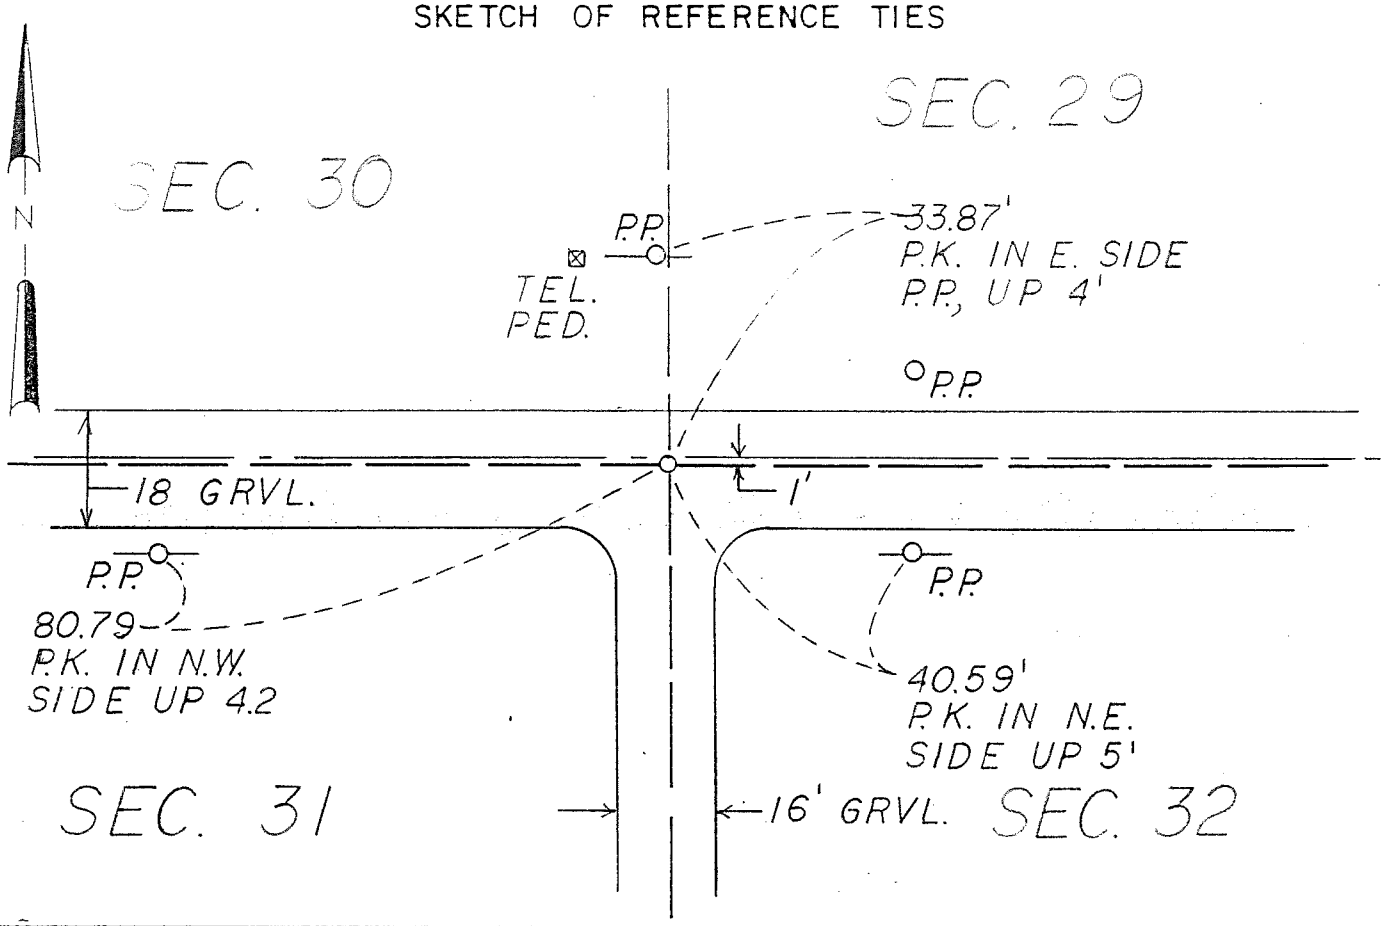


Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
12-31-91 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof. Engineer
☐ County Surveyor ☐ County Engineer


Zenk•Read•Trygstad & ASSOCIATES, INC.
Engineers/Architects/Land Surveyors/Planners
Box 689, Albert Lea, MN 56007 507/373-0689


OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the _____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

NORTHEAST CORNER SECTION 31, TOWNSHIP 103 NORTH, RANGE 14 WEST, 5 PM

September, 1853 — John Ball, Deputy Surveyor, set post at corner. Deposited a handful of charcoal. Raised mound of earth and sod. Cut a trench and planted Osage Orange seeds SE, SW, NE and NW between pits and trench during the original Public Land Survey.

July 29, 1991 — Zenk Read Trygstad & Associates, excavated with a backhoe a trench 5 feet East to 5 feet West by 2.5 foot North to 2.5 South of the road centerlines by 4.5 feet deep and found a concrete monument 2.8 feet below the surface, 1 foot south of the east-west centerline and on the centerline to the south. The monument was removed during excavation.

An analysis of the record data shows no indication of the origin of the concrete monument. The monument agrees with the intersection of the township roads and is similar to others set by the County during section corner maintenance work. The monument is therefore accepted as marking the location of the original Public Land Survey Corner.

Index No. P 110 "M."

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 32, Township 103N Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 4-23-92 (DATE) found a 1"ø BOLT ON SOUTH SIDE OF 8"x15" FIELD STONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-23-92 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

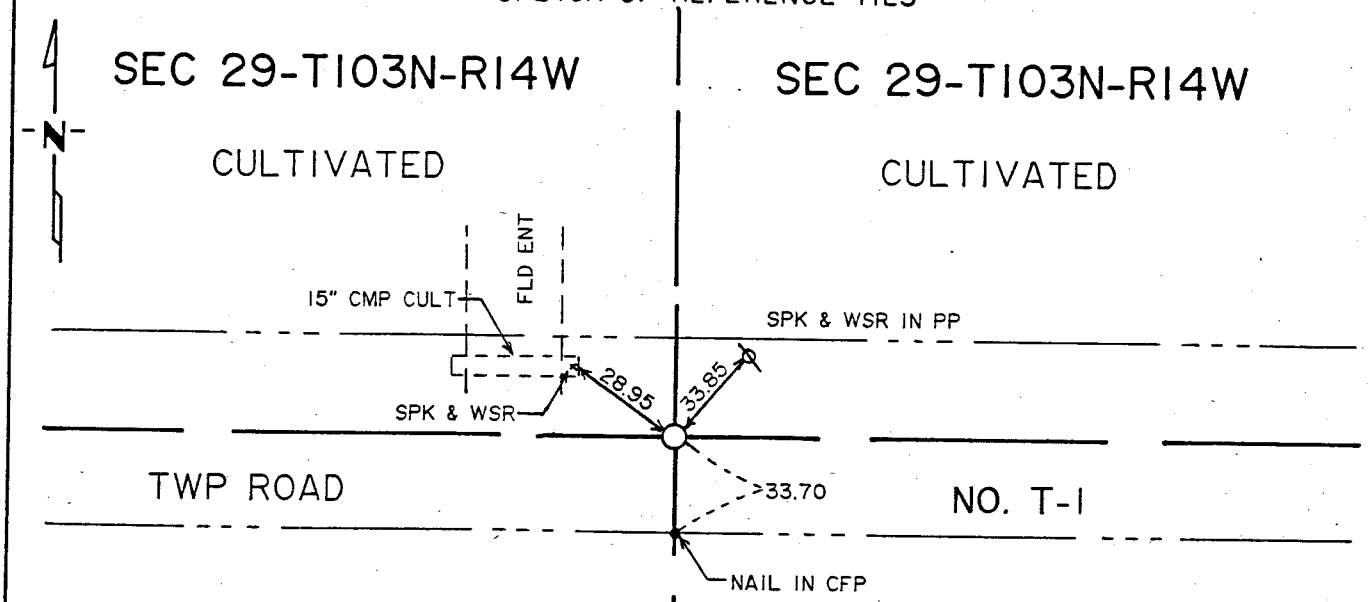


JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-15-92 DATE

Registration No. 13907

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Sec 32-103-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following evidence was obtained to support a perpetuation of the original public land survey corner.

1987 Book A in the Office of Mower County Highway Department shows a 1/2" diameter iron pipe capped RLS 13810 (Jerome Schwarz) placed. The following ties were taken:
34.37' N to nail and ribbon in east face of PP
50.74' NE to rail and ribbon in top wooden fence post
33.08' S to nail and ribbon in west face of corner post
Corner is SE of short fence line and on line with most of fence running south

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug with County backhoe on centerline of Township Road T-1 and fence going south. Uncovered a 1" bolt on south side of 8"x15" field stone. Left monument as found and placed public land survey cast iron monument over stone on road surface. Found no evidence of 1/2" diameter capped pipe recorded in Book A.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. P110 "M"

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

(N¼) NORTH QUARTER Corner of Section 32, Township 103, Range 19, 5TH P.M.

STATE OF MINNESOTA, County of [redacted] MOWER.


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 6/2/87 (DATE) placed a ½" CAPPED IRON PIPE AT CORNER

## SKETCH OF REFERENCE TIES

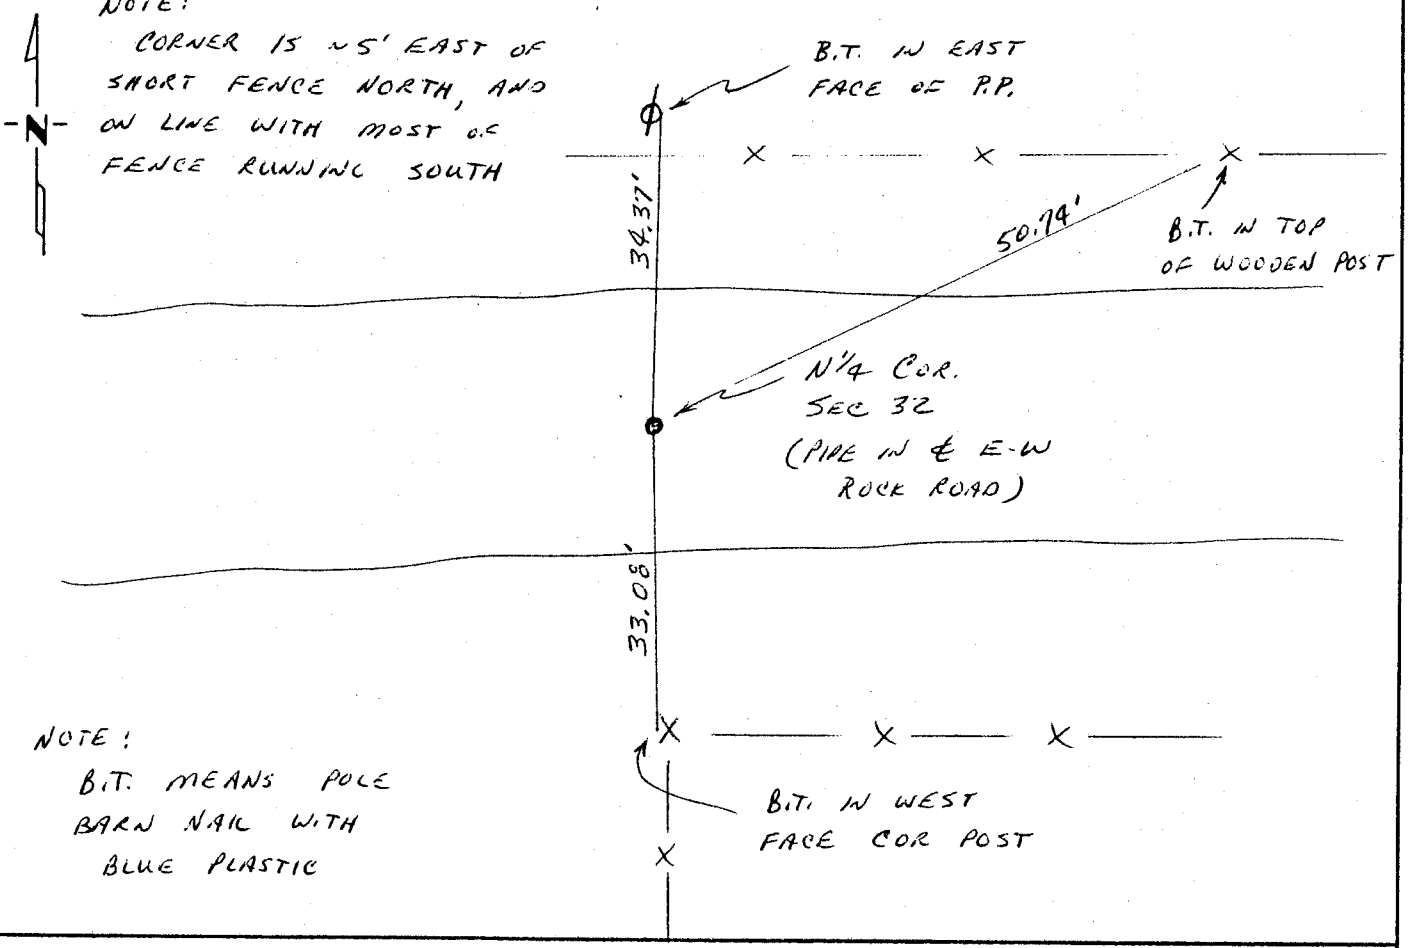


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Jerome R. Schwarz (SIGNATURE) 6/23/87 (DATE)

Registration No. 13810

☒ Land Surveyor,

☐ County Surveyor,

OFFICE OF THE COUNTY RECORDER
County of Fillmore

I hereby certify that this document was filed in the Recorder's office at _____ .M. on the _____ day of _____ A.D., 19___

Co. Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 33, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/05/1997 (DATE) found a STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/05/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

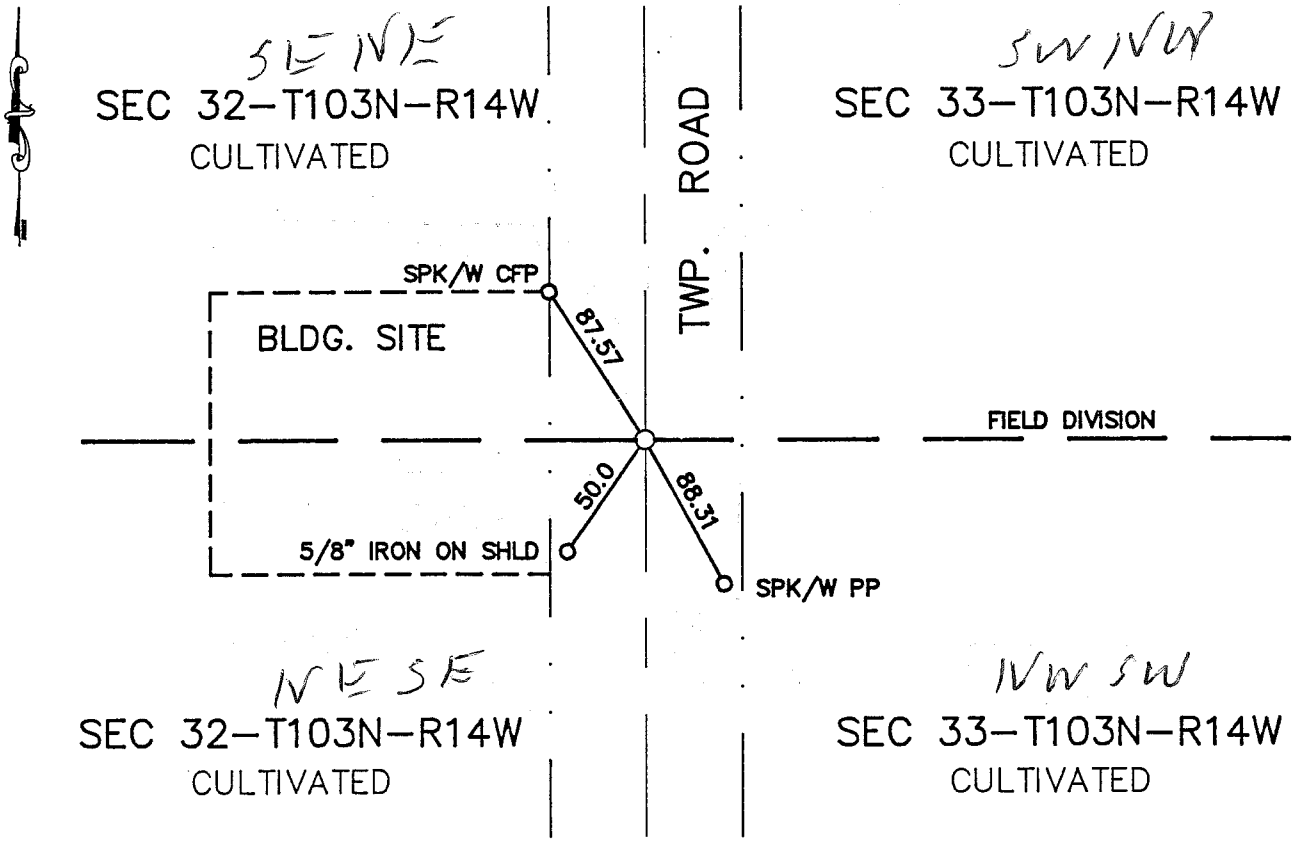


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-9-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P .M. on the 14 day of Oct A.D., 1997

COUNTY RECORDER Charles Ingen 96-480

By Susan M. Davis, Deputy

DOCUMENT NO. 456837

M.H.D. FORM NO. 2105 BOOK 96 PAGE 480

Book 96 Misc Page 480 JHS

W 1/4 Cor SEC 33-103-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the county backhoe at the CL of township road N-S and field division east. Uncovered a stone 3.0'+/- below road surface. Accepted stone as true PLS corner and placed a 5/8" iron capped 13807 on the north side of stone. Placed a cast iron monument above stone 0.4' below road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 34, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/01/1997 (DATE) found a 1/2" IRON CEMENTED IN 6" TILE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/01/1997 (DATE) placed a CAPPED 5/8" IRON

SKETCH OF REFERENCE TIES

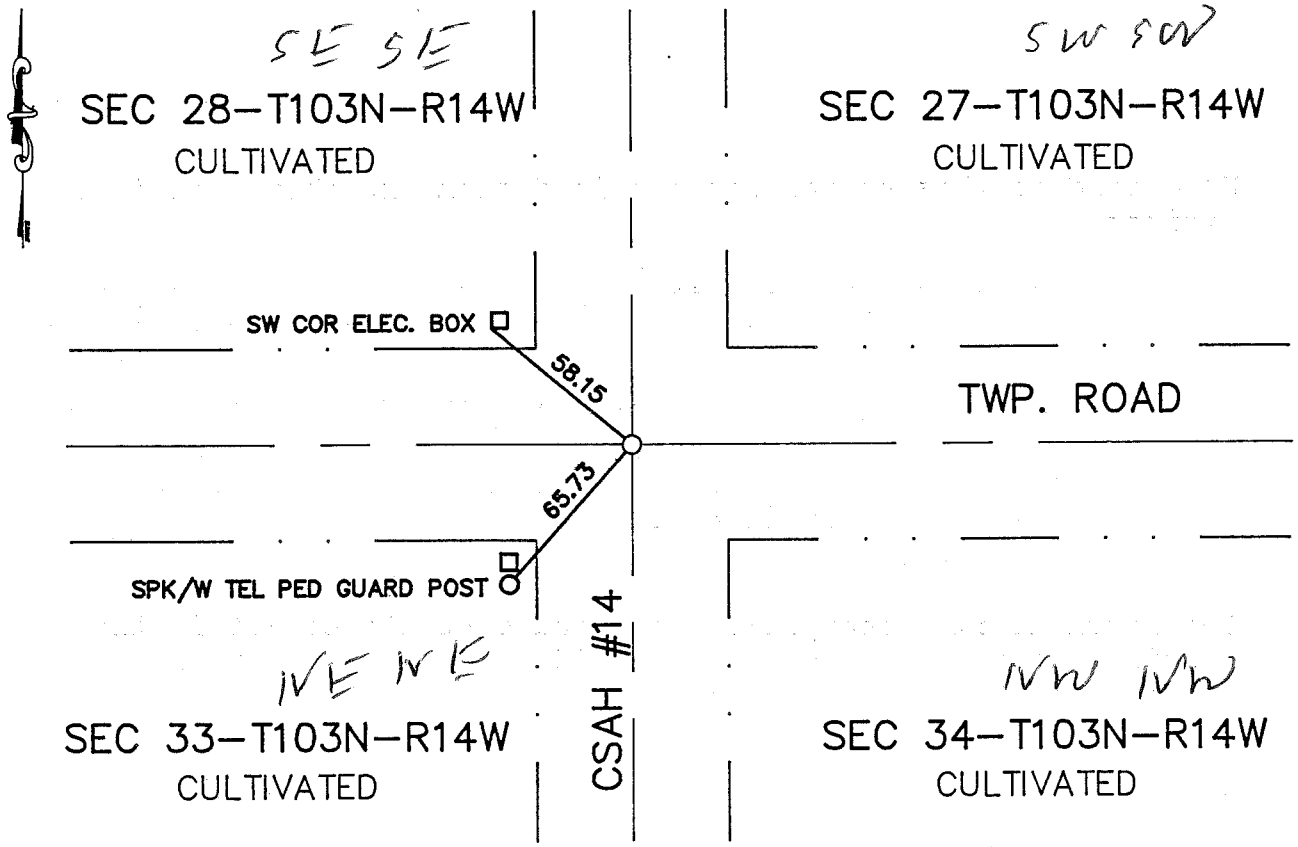


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-9-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 14th day of Oct A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Lauer, Deputy

DOCUMENT NO. 456838

M.H.D. FORM NO. 2105

ECCUK 96 PAGE 482

Book 96 Misc Page 482 HS

NW Cor SEC 34-103-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the county backhoe at the intersection of township road E-W and CSAH No. 14. Uncovered a 6" tile with a 1/2" iron cemented in tile. Also found wood stakes on the north and south side of tile sitting over stone. Placed a 5/8" iron capped 13807 on the north side of tile monument. Placed a 5/8" iron capped 13807 over tile monument found 0.4' below road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 34, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/06/1997 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/06/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

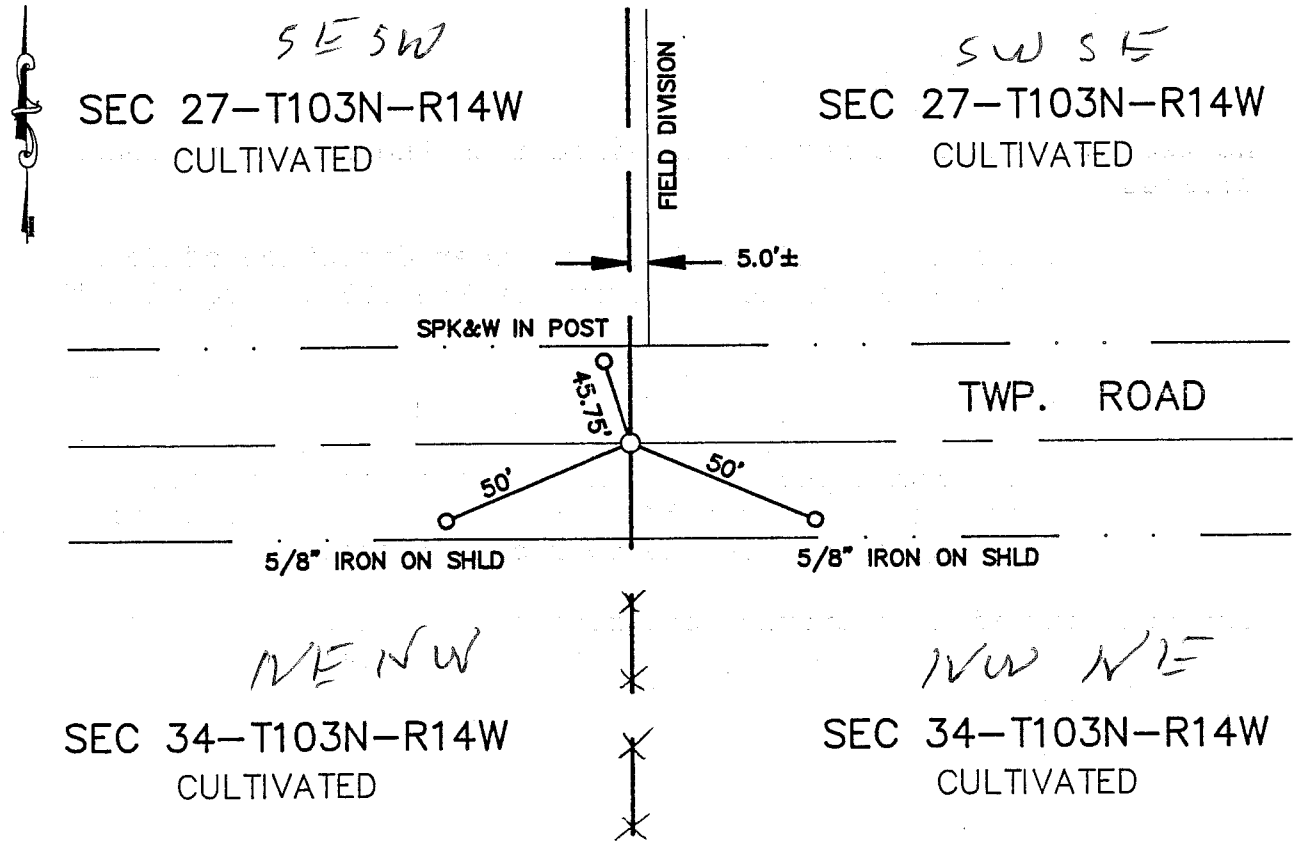


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-4-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 14 day of Oct A.D., 1997

COUNTY RECORDER Charles Enger
By Susan M. Davis, Deputy
DOCUMENT NO. 456839

M.H.D. FORM NO. 2105 BOOK 96 PAGE 484 Book 96 Misc Page 484

N 1/4 Cor SEC 34-103-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the county backhoe at the CL of township road E-W and in line with line fence south. Dug to virgin soil and found no evidence of original PLS corner. Placed a cast iron monument on road CL and in line with line fence south and 5' west of field division north.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 34, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/06/1997 (DATE) found a TWO WOOD POSTS

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/06/1997 (DATE) placed a CAPPED 5/8" IRON

SKETCH OF REFERENCE TIES

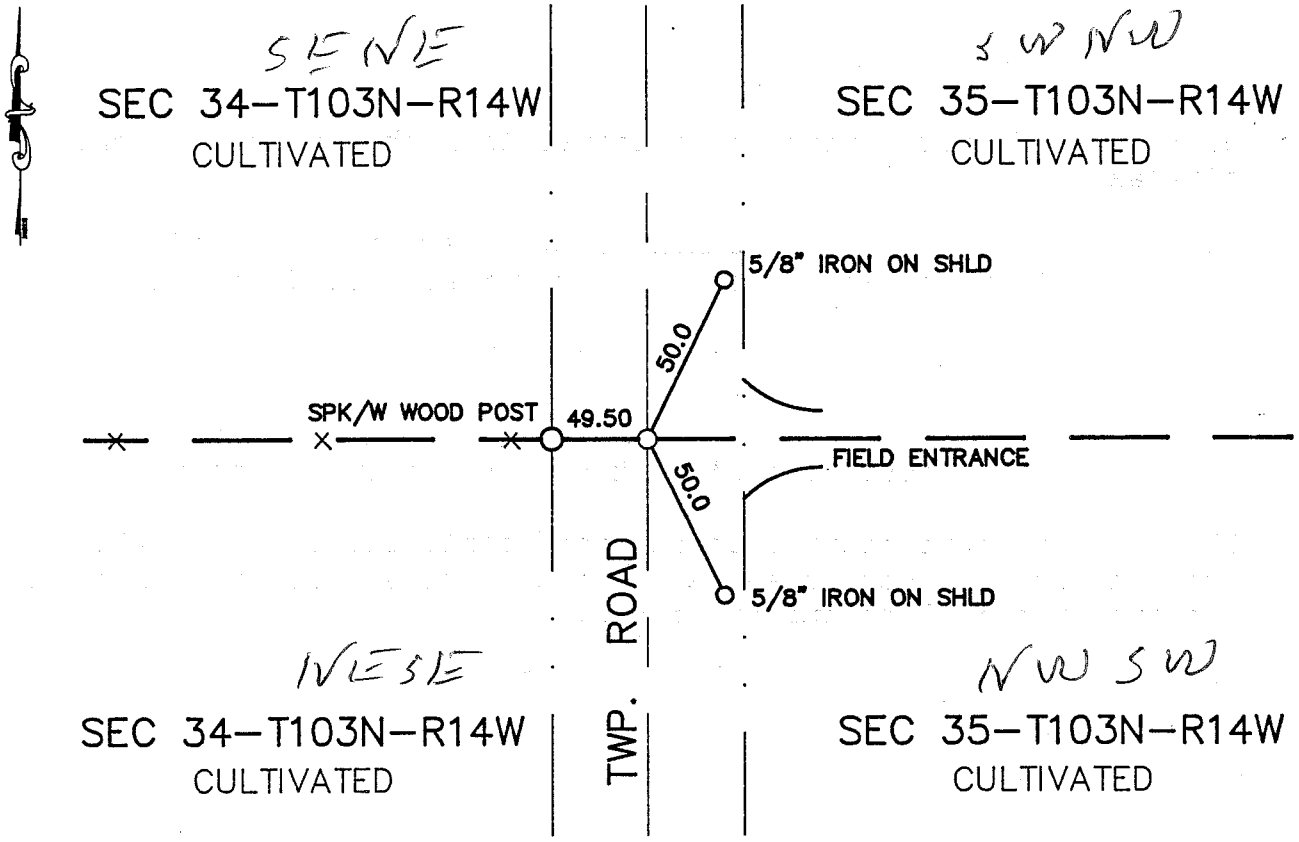


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-9-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P .M. on the 14 day of Oct A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 456840

M.H.D. FORM NO. 2105

BOOK 96 PAGE 486

Book 96 Misc Page 486

E 1/4 Cor SEC 34-103-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the county backhoe at the CL of township road N-S and in line with line fence west. Uncovered two wood posts 4.0'+/- deep in natural soil. Accepted posts as true PLS corner and placed a 5/8" iron capped 13807 in the center of posts found. Placed a cast iron monument over posts 0.4' below road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 34, Township 103N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/01/1997 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/01/1997 (DATE) placed a CAPPED 5/8" IRON

SKETCH OF REFERENCE TIES

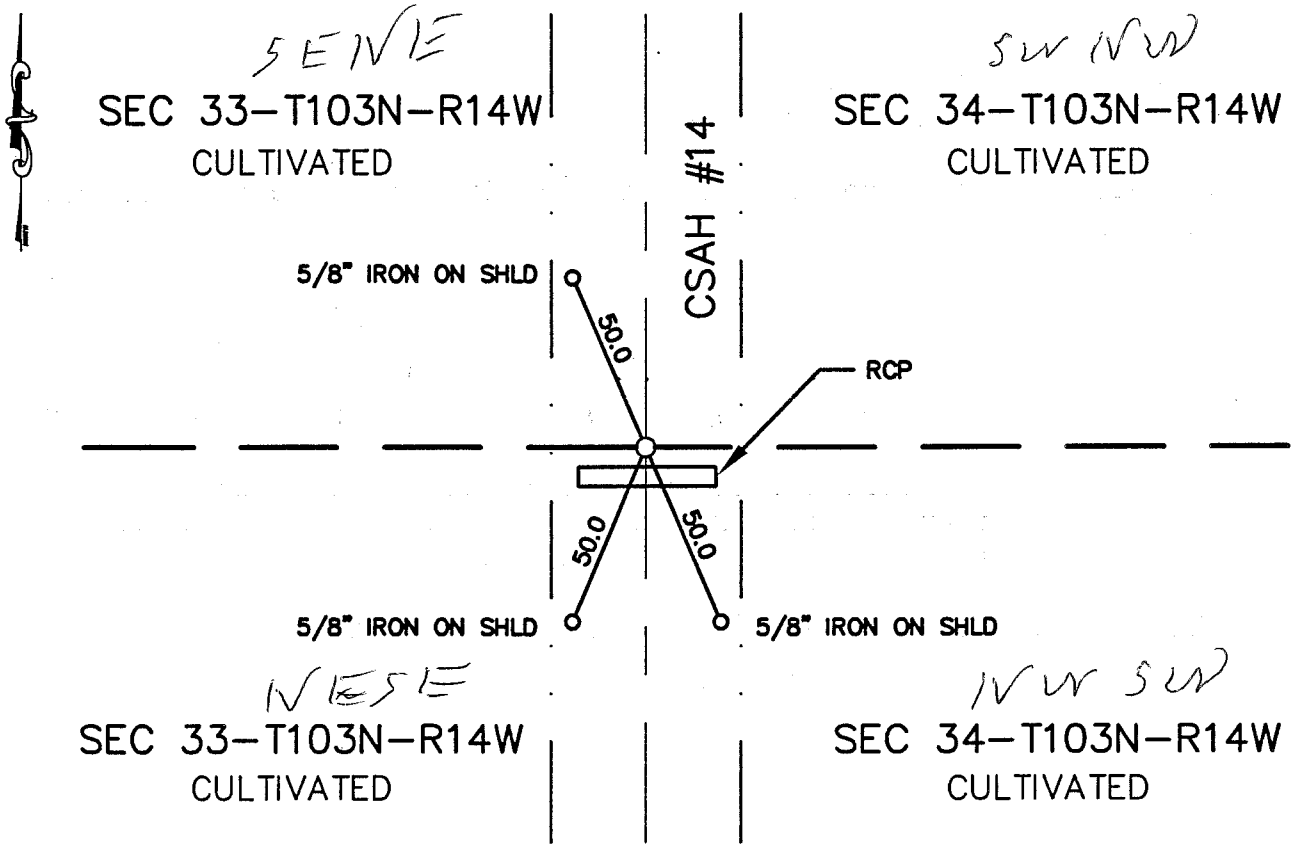


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-9-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P .M. on the 14 day of Oct A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 456841

M.H.D. FORM NO. 2105 BOOK 96 PAGE 488

Book 96 Misc Page 488

W 1/4 Cor SEC 34-103-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found 48" RCP crossing CSAH No. 14 at the location of this corner. The original PLS corner would have been destroyed during road construction. Set a 5/8" iron capped RLS 13807 at the midpoint of a line between the NW and SW corners of section 34.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.